



### Typical Applications

Central door lock, Anti-theft lock, Power doors & windows, Turning lamp, dangerous signal & scram lamp control, Seat adjustment, Air-conditioning, Fuel pump control, Low temperature control, Sunroof motor control, Audio system, Rear window defoggers, Starter solenoid switches

### Features

- 45A switching capability
- PCB terminals
- 1 Form A & 1 Form C contact arrangement
- RoHS & ELV compliant

## CHARACTERISTICS

|  |  |  |  |
|--|--|--|--|
| Contact arrangement                      | 1A, 1C   | Ambient temperature  | -40°C to 125°C   |
| Voltage drop (initial) <sup>1)</sup>     | NO:Typ.20mV,250mV max.(at 10A)<br>NC:Typ.30mV,250mV max.(at 10A) | Vibration resistance <sup>7) 9)</sup>  | 10Hz to 40Hz 1.27mm DA<br>40Hz to 70Hz 49m/s <sup>2</sup><br>70Hz to 100Hz 0.5mm DA<br>100Hz to 500Hz 98m/s <sup>2</sup> |
| Max. continuous current <sup>2) 9)</sup> | 30A (at 85°C, 8h)  | Shock resistance <sup>7) 9)</sup>  | 98m/s <sup>2</sup>   |
| Max. switching current <sup>3) 9)</sup>  | Make: 100A (Lamp, Inrush current)<br>Break: 60A (Resistive)      | Termination  | PCB <sup>8)</sup>  |
| Max. switching voltage <sup>4)</sup>     | 75VDC  | Construction   | Plastic sealed   |
| Min.contact load                         | 1A 6VDC  | Unit weight  | Approx. 20g  |
| Electrical endurance                     | See " CONTACT DATA "   | <sup>1)</sup> Equivalent to the max. initial contact resistance is 100mΩ (at 1A 6VDC).<br><sup>2)</sup> For NO contacts, measured when applying 100% rated voltage on coil.<br><sup>3)</sup> For NO contacts, at 23°C, 13.5VDC, resistive load (100 cycles).<br><sup>4)</sup> For NO contacts, see "Load limit curve" for details.<br><sup>5)</sup> 1min, leakage current less than 1mA.<br><sup>6)</sup> The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.<br><sup>7)</sup> When energized, opening time of NO contacts shall not exceed 100μs, when non-energized, opening time of NC contacts shall not exceed 1ms, meantime, NO contacts shall not be closed.<br><sup>8)</sup> Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is (250±3)°C , (5±0.3)s.<br><sup>9)</sup> Only for the 12VDC coil voltage type. |  |
| Mechanical endurance                     | 1x10 <sup>7</sup> OPS (300OPS/min)                               |  |  |
| Initial insulation resistance            | 500MΩ (at 500VDC)  |  |  |
| Dielectric strength <sup>5)</sup>        | between contacts: 500VAC<br>between coil & contacts: 500VAC      |  |  |
| Operate time <sup>9)</sup>               | Typ.: 5ms<br>Max.: 10ms (at nomi. vol.)                          |  |  |
| Release time <sup>6) 9)</sup>            | Typ.: 3ms<br>Max.: 10ms  |  |  |

## CONTACT DATA <sup>3)</sup>

at 23°C

| Load voltage | Load type             |            | Load current A |            |       | On/Off ratio |       | Electrical endurance       | Contact material   | Load wiring diagram <sup>2)</sup> |
|--------------|-----------------------|------------|----------------|------------|-------|--------------|-------|----------------------------|--------------------|-----------------------------------|
|              |                       |            | 1C             |            | 1A    | On s         | Off s |                            |                    |                                   |
|              |                       |            | NO             | NC         |       |              |       |                            |                    |                                   |
| 13.5VDC      | Resistive             | Make       | 45             | 30         | 45    | 1.5          | 1.5   | 1×10 <sup>5</sup> OPS      | AgSnO <sub>2</sub> | See diagram 1                     |
|              |                       | Break      | 45             | 30         | 45    |              |       |                            |                    |                                   |
|              | Flasher <sup>1)</sup> | 2×21W+5W   | ---            | 2×21W+5W   | 0.375 | 0.375        | 1000h | Special AgSnO <sub>2</sub> | See diagram 2      |                                   |
|              |                       | 4×21W+2×5W | ---            | 4×21W+2×5W | 0.375 | 0.375        | 360h  |                            |                    |                                   |



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2019 Rev. 1.00

- When it is utilized in flasher, a special AgSnO<sub>2</sub> contact material should be used and the customer special code should be (170) as a suffix. Please connect by the polarity according to the diagram below.
- The load wiring diagrams are listed below:

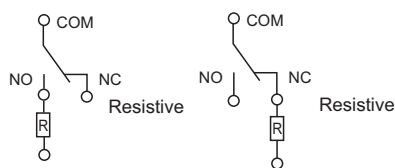


diagram 1




diagram 2

- When the load voltage is at 24VDC or higher, or the applications conditions are different from the table above, please submit the detailed application conditions to Hongfa to get more support.

## COIL DATA

at 23°C

|           | Nominal voltage<br>VDC | Pick-up voltage<br>VDC. |       |       | Drop-out voltage<br>VDC |      |       | Coil resistance<br>x(1±10%)Ω | Power<br>consumption<br>W |
|-----------|------------------------|-------------------------|-------|-------|-------------------------|------|-------|------------------------------|---------------------------|
|           |                        | 23°C                    | 85°C  | 125°C | 23°C                    | 85°C | 125°C |                              |                           |
| Standard  | 6                      | ≤3.3                    | ≤4.1  | ≤4.7  | ≥0.6                    | ≥0.7 | ≥0.8  | 19                           | 1.9                       |
|           | 12                     | ≤6.8                    | ≤8.5  | ≤9.7  | ≥1.2                    | ≥1.5 | ≥1.7  | 90                           | 1.6                       |
|           | 24                     | ≤13.9                   | ≤17.3 | ≤19.9 | ≥2.4                    | ≥3.0 | ≥3.3  | 362                          | 1.6                       |
| Sensitive | 6                      | ≤4.5                    | ≤5.6  | ≤6.4  | ≥0.6                    | ≥0.7 | ≥0.8  | 30                           | 1.2                       |
|           | 12                     | ≤9.0                    | ≤11.2 | ≤12.9 | ≥1.2                    | ≥1.5 | ≥1.7  | 120                          | 1.2                       |
|           | 24                     | ≤19.2                   | ≤23.9 | ≤27.4 | ≥2.4                    | ≥3.0 | ≥3.3  | 480                          | 1.2                       |

1) Max. allowable overdrive voltage is stated with no load applied.

## ORDERING INFORMATION

|                            |  |  |  |  |  |  |  |  |
|----------------------------|--|--|--|--|--|--|--|--|
| Type                       | HFKP / 012 -1H 4 T S (XXX)   |  |  |  |  |  |  |  |
| Coil voltage               | 006: 6VDC 012: 12VDC 024: 24VDC  |  |  |  |  |  |  |  |
| Contact arrangement        | 1H: 1 Form A 1Z: 1 Form C  |  |  |  |  |  |  |  |
| Version <sup>1)</sup>      | 4: European Plastic sealed model<br>6: European Plastic sealed model, 3 yoke terminals |  |  |  |  |  |  |  |
| Contact Material           | T: AgSnO <sub>2</sub>  |  |  |  |  |  |  |  |
| Coil Power                 | S: Sensitive Nil: Standard   |  |  |  |  |  |  |  |
| Special code <sup>2)</sup> | XXX: Customer special requirement Nil: Standard  |  |  |  |  |  |  |  |

Notes: 1) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.



2) The customer special requirement express as special code after evaluating by Hongfa. e.g. (170) stands for flasher load.

# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT



Unit: mm

## Outline Dimensions

HFKP/□□□-1□4□□(XXX)




HFKP/□□□-1□6□□(XXX)




## PCB Layout (Bottom view)

HFKP/□□□-1□4□□(XXX)

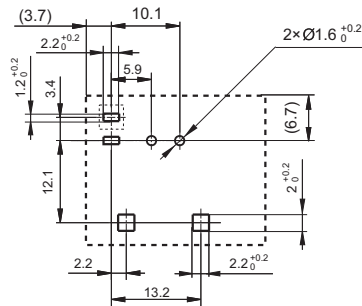

HFKP/□□□-1□6□□(XXX)

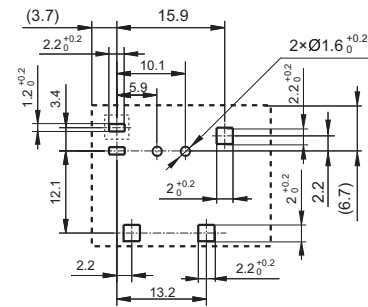


Remark: 1) \* The additional tin top is max. 1mm.

2) The tolerance without indicating is always  $\pm 0.1$ mm.


3) □ means that the mounting hole doesn't exist for HFKP/□□□-1H□□□(XXX) type.

## Wiring Diagram (Bottom view)

HFKP/□□□-1H4□□(XXX)




HFKP/□□□-1Z4□□(XXX)




Wiring Diagram (Bottom view)

HF KP/□□□-1H6□□(XXX)




HF KP/□□□-1Z6□□(XXX)




CHARACTERISTIC CURVES

1. Coil operating voltage range

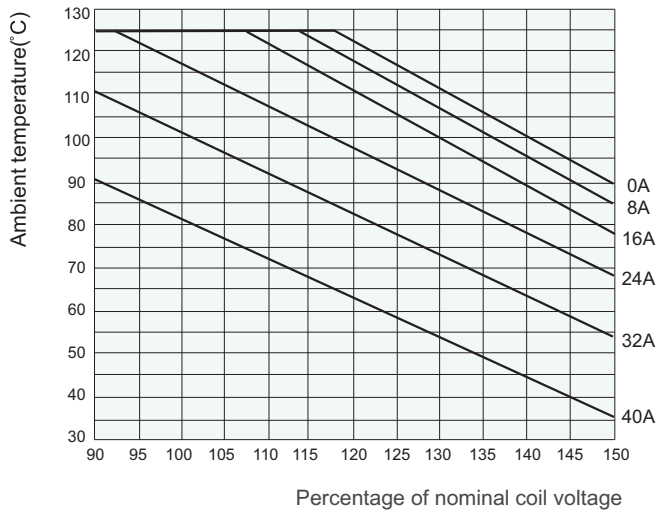

- 1) The maximum allowable coil temperature is 180°C. For the coil temperature rise which is measured by resistance is average value, we recommend the coil temperature should be below 170°C under the different application ambient, different coil voltage and different load etc.
- 2) If the actual operating coil voltage is out of the specified range, please contact Hongfa for further details.

2. Load limit curve (at 23°C)

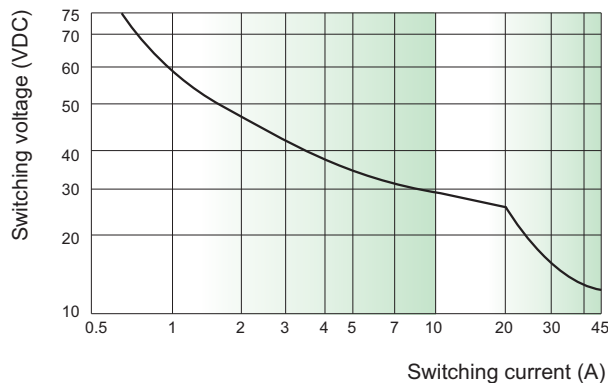

- 1) This chart takes NO contact, Resistive load as example.
- 2) The load and electrical endurance tests are made according to "CONTACT DATA" parameters' table. If actual load voltage, current, operate frequency, or ambient temperature is different from "CONTACT DATA" table, please arrange corresponding tests for confirmation.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.