


66R566x55-JB2835 family are LED modules based on the CREE LED® J_Series® J2835 optimized for cost effective and high efficacy applications. 66R566x55-JB2835 modules are providing optimized and easy integration, with excellent quality, reliability and precision.

High efficacy **212 lm/W** and up to **14700lm**.

LM-80 lifetime projections (IEC 62717)
> 100,000 (L70B10)¹

Quick and effective heat dissipation due to the using MPCB with thermal conductivity **1.3 W/mk**, Lead Free HASL

EPREL registered product

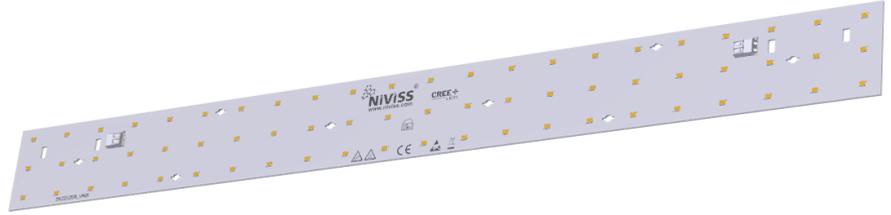

➤ **SPECIFICATION**

LED FAMILY	J SERIES 2835	
CCT/SDCM	3000K 3-STEP	4000K 3-STEP
Viewing Angle	120°	
Nominal Module Lumen Output ²	1932 lm	2033 lm
Nominal Efficacy ²	200 lm/W	212 lm/W
CRI	80	
Nominal Driving Current	330 mA	
Voltage DC (typ.) ²	29.1 V	
Voltage DC (max)	36.3 V	
Power Consumption ²	9.6 W	
Max. LED module working current³	2.8 A / module	
Max power	101.64 W	
Max. LED module lumen output³	13830 lm	14700 lm
Number of LEDs	66	
Power Supply Type	Constant Current	
Risk Group Classification ⁴	RG-1 Low Risk	
Energy Class	B	A
Operating Temperature	-30°C ÷ +60°C	
Tc max.	85°C	
Lifetime ¹ /Tc life	>102000 h 55°C, 330 mA,	

¹ Lifetime of LEDs as declared by the manufacturer **CREE LED®** according to IES LM-80-2015 Testing Results.
² Source performance in real-life conditions at T=55°C without heatsink.
³ External heatsink required.
⁴ According to [Eye safety Cree document](#)

➤ FEATURES

Application:

- ❖ Decorative lighting
- ❖ Accent lighting
- ❖ Task lighting
- ❖ General lighting
- ❖ Recessed furniture LED spotlight


Feature:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving


EPREL Database link
QR CODE




➤ TYPICAL SPATIAL DISTRIBUTION

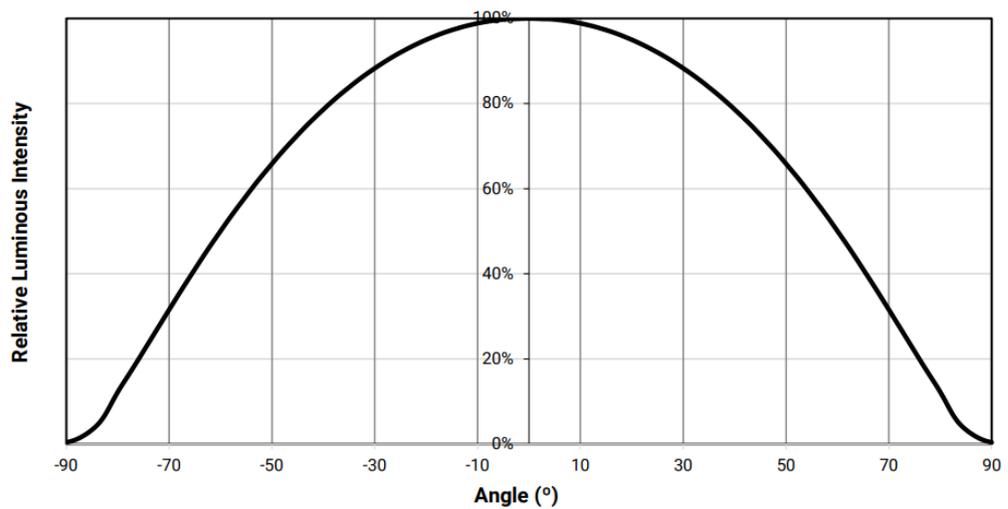


➤ **LUMINOUS EFFICACY VS. POWER**

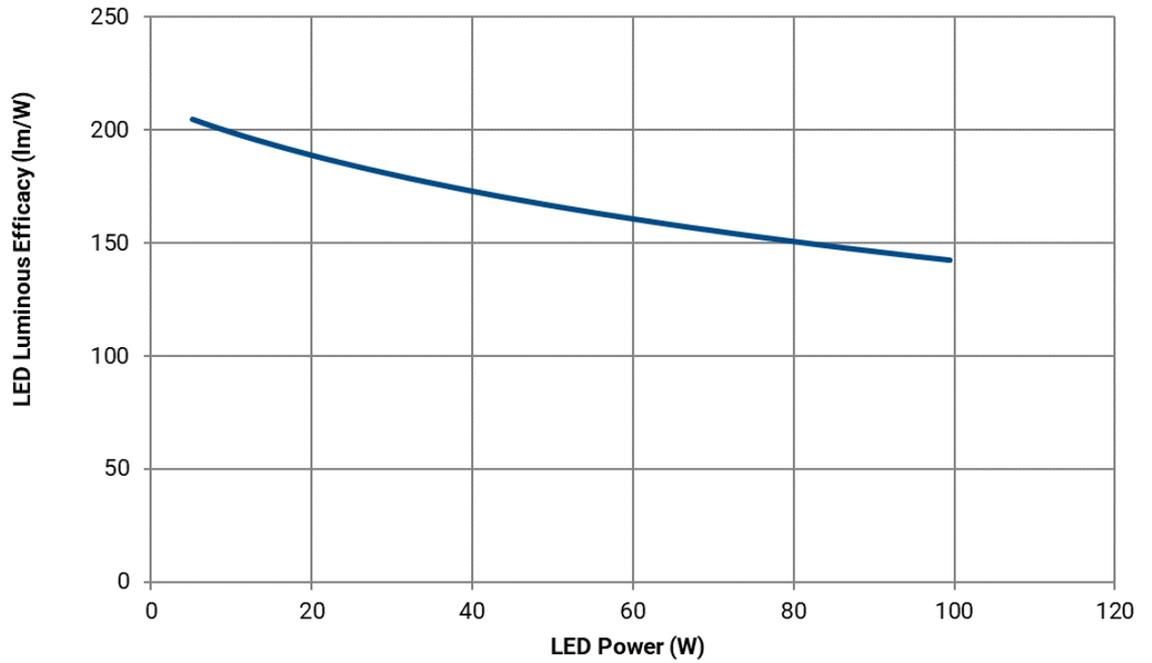


➤ **LUMINOUS FLUX VS. POWER**

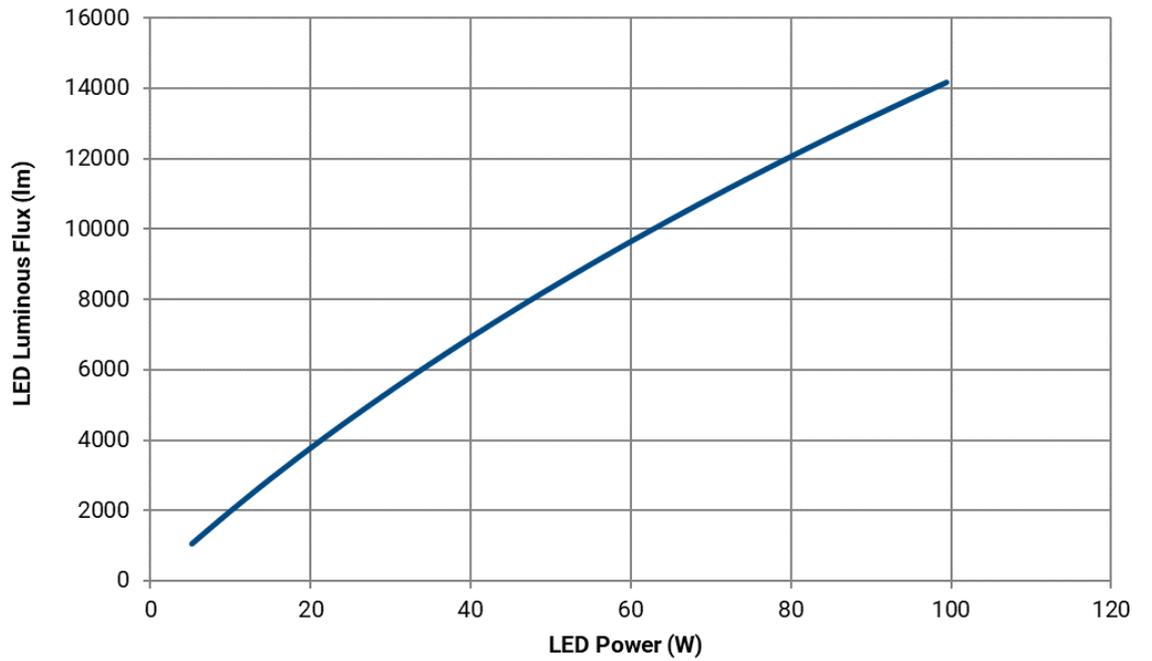


➤ LUMINOUS FLUX
VS.
JUNCTION
TEMPERATURE

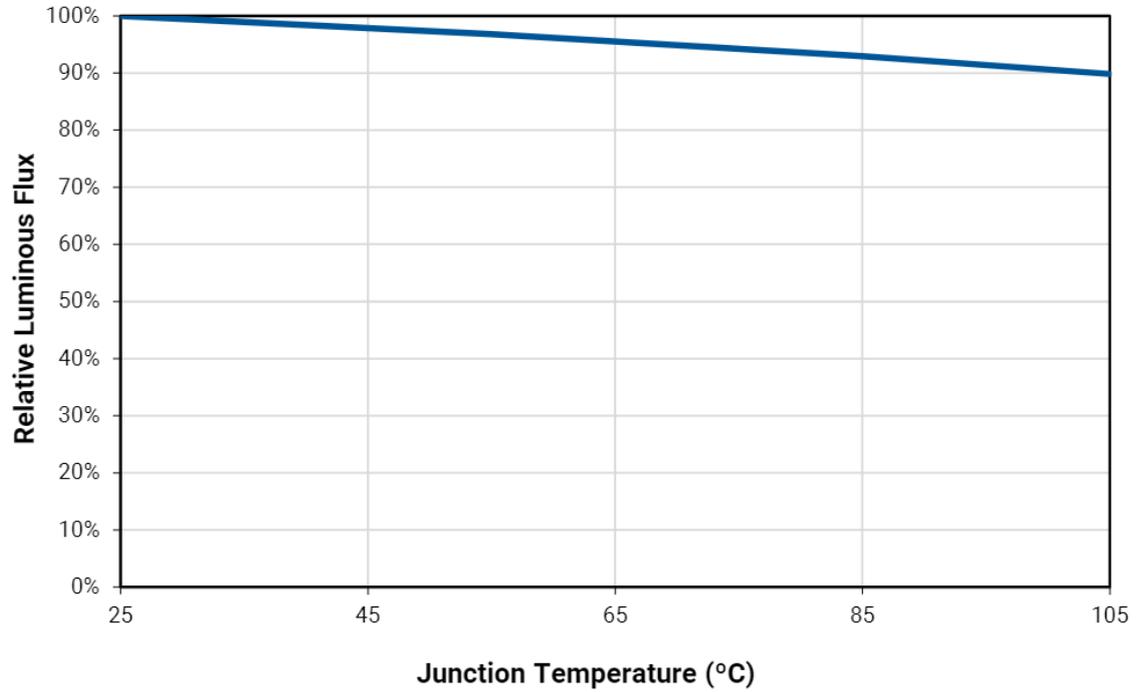


➤ RELATIVE
CHROMATICITY
VS.
TEMPERATURE

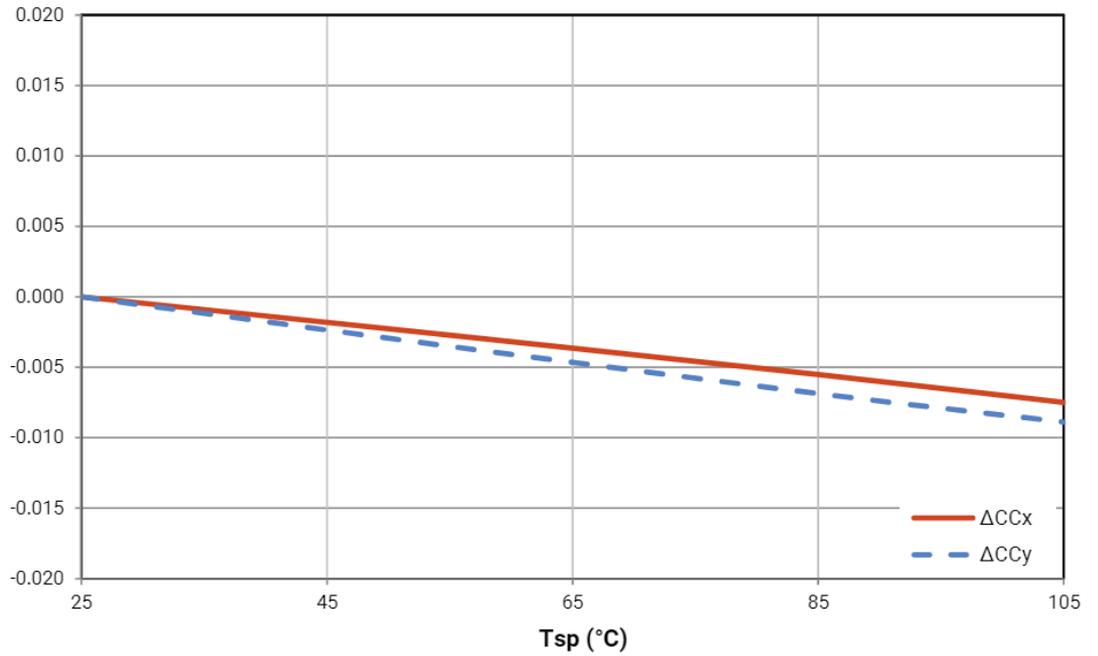

➤ RELATIVE CHROMATICITY VS. CURRENT

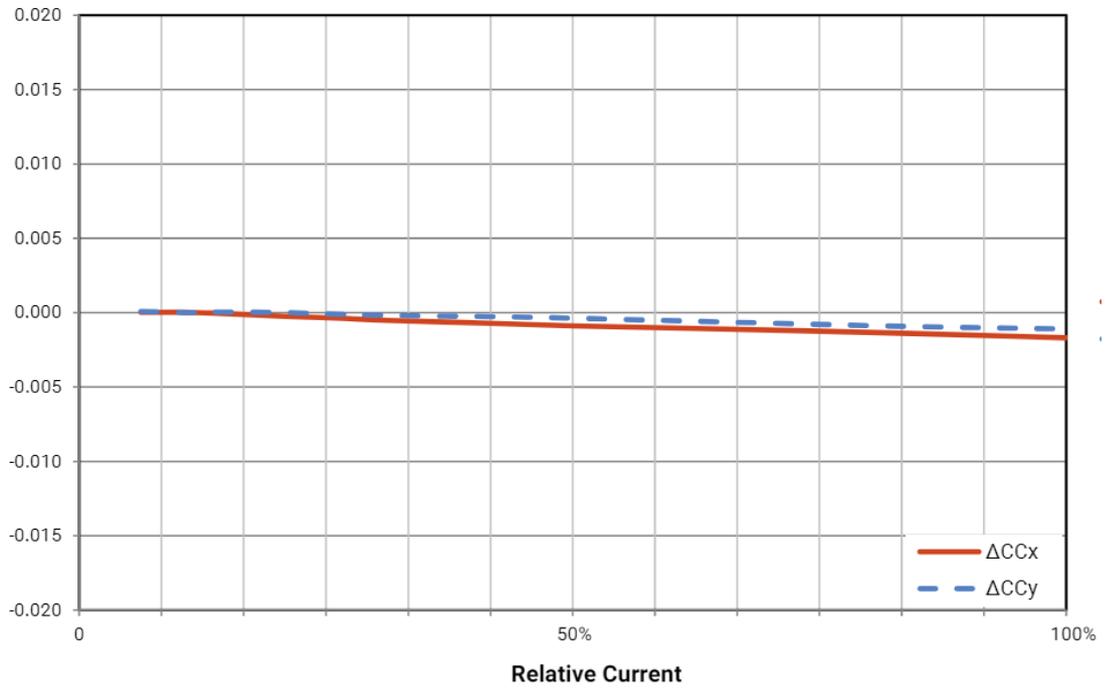


➤ DIMENSIONS

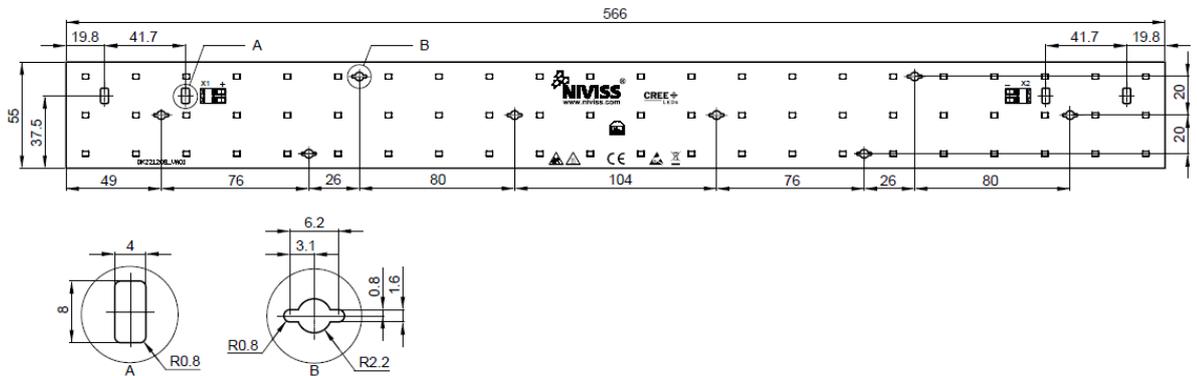


Notes:
Drawing is not to scale.
All dimensions are in millimeters.

MECHANICAL SPECIFICATION	
Dimensions	566 x 55 mm
Board Thickness	1.6 mm
Board Material	MCPCB, 3003 Alloy, 1.3W/(m²K); white soldermask
Shape	Rectangular

➤ **CONNECTION**

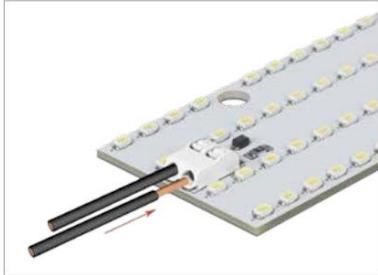


Inserting solid conductors via push-in termination.

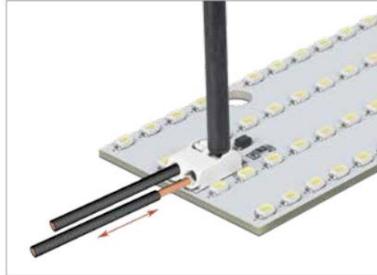


Inserting/removing fine-stranded conductors by lightly pressing on push-button (e.g., using a 206-860 operating tool).



➤ **ELECTRICAL SCHEMA**

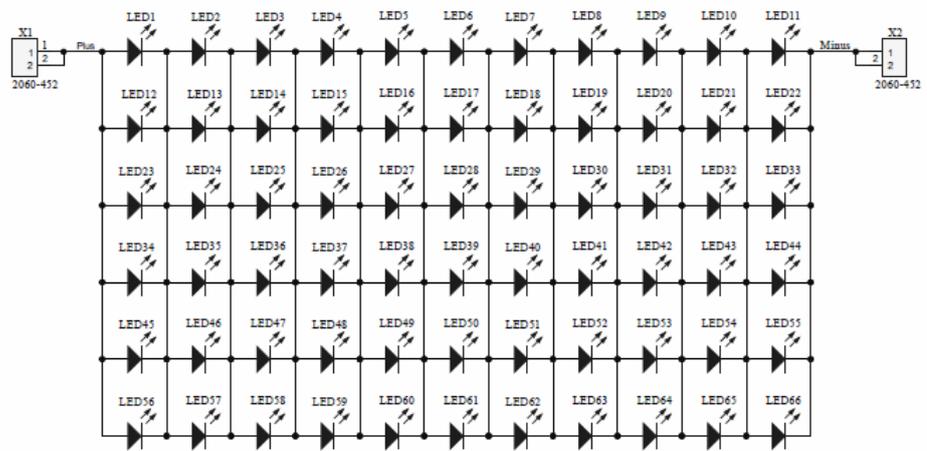

➤ **ELECTRICAL INSTALLATION**

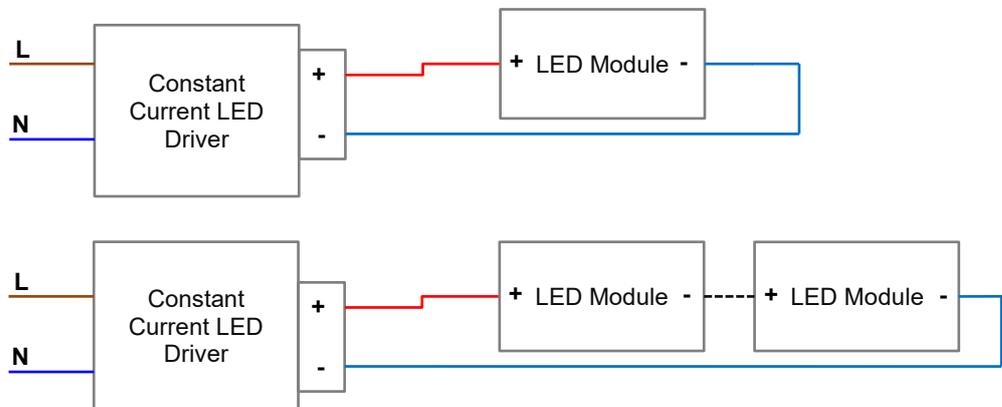

Notes:
The clearance distances are designed for working voltage up to **500V DC**

➤ **ORDERING CODE**

ORDERING CODE / ARTICLE CODE	DESCRIPTION
MOD-66R566x55-JB2835B-3080-VA02	LED Module, High Efficacy, white soldermask, 66 LED, 566x55 mm, JB2835B, 3000K, CRI 80, 33V
MOD-66R566x55-JB2835B-4080-VA02	LED Module, High Efficacy, white soldermask, 66 LED, 566x55 mm, JB2835B, 4000K, CRI 80, 33V

➤ COMMERCIAL INFORMATION

COMMERCIAL INFORMATION	
Connector	WAGO 2060
Available Lenses	12927 CARCLO 12927-V2 CARCLO F14170 FLORENCE-ZT25 LEDIL F15069 FLORENCE-O LEDIL F15244 FLORENCE-ZT25-S LEDIL F16007 FLORENCE2-Z90 LEDIL F13853 FLORENCE-Z90 LEDIL F14112 FLORENCE-Z60 LEDIL
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	FLS-25-700DALI2-LA1 EAGLERISE FLS-21-500LD EAGLERISE SLT35-700IL-E SELF LCM-25 MEAN-WELL LCM-25DA MEAN-WELL LDC-35 MEAN-WELL LDC-35B MEAN-WELL

➤ GENERAL TERMS OF USE

- The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series® 2835](#)
- Connecting to the power supply should be done when the power supply is off.
- Modules should be connected to heatsink to dissipate heat form LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
- During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
- Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
- The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
- For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: cree-led.com

**Niviss is not responsible for any damage or failure due to not comply with above rules.
Otherwise, the complaint will not be taken into account.**

➤ ENVIRONMENTAL CAUTION



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ DATA DOWNLOAD

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)