
PANEL1153-841

15" TFT Expandable Intel® Core™2 Duo Industrial Panel Computer with 2 PCI Slots





- (RS-232/RS-422/RS-485)
- 2. DVI-I
- 3. Ethernet x 2
- 4. IEEE 1394a x 2

7. COM 2/3 (RS-232)

- 5. USB 2.0 x 4 6. Audio (Mic-in/Line-out)
- 8. Power switch 9. AC power 10. PCI x 2

Features



- 15" XGA TFT LCD display
- Intel® Core™2 Duo processor
- Intel® Q965 + ICH8 chipset
- Supports 2 PCI slots
- Built-in speakers & optional WLAN module
- Windows® Vista and 7 supported
- Supports panel mount and rack mount



Introduction

The PANEL1153-841 is a 15" Industrial panel PC which features Intel® Core™2 Duo processor and Intel® Q965 chipset to provide powerful computing performance. This panel PC also offers the expansion ability with 2 PCI slots. Further, the PANEL1153-841 adopts built-in speaker and WLAN module for wireless connectivity.

Powerful computing: Intel® Core™2 Duo processor
The PANEL1153-841 features Intel® Core™2 Duo with a maximum of FSB 1066MHz
and Intel® Q965+ICH8 chipset. It features two IEEE 1394a ports, two gigabit Ethernet ports and up to 4GB of dual-channel DDR2 system memory which deliver high computing capability for high performance-demanding applications.

Expandable for 2 PCI slots

The PANEL1153-841 has 2 PCI slots for expansion purpose. User can easily plug in standard half-size PCI cards such as motion card, communication

Speaker & WLAN antenna supported

The PANEL1153-841 features built-in speaker, optional WLAN module and antenna for wireless network connectivity.

Specifications

Front Bezel	Industrial-grade material with IP65/NEMA 4 rugged protection		Chipset	Intel® Q965 + ICH8
LCD Panel	Display Type	15" XGA TFT	System Memory	2 x 240-pin DDR2 DIMM max. up to 4 GB
	Brightness (cd/m²)	250 nits	BIOS	Phoenix-Award 4 Mbit with RPL/PXE LAN
	Resolution	1024 x 768 pixels		Boot ROM, SmartView and customer
	Viewing Angle (H/V)	140°/120°		CMOS backup
Main system	CPU	LGA775 for Intel® Core™2 Duo/ Core™	Storage	2 x 3.5" or 2 x 2.5" SATA HDD
		Solo processor with FSB 533/667/800/	Drive	1 x built-in slim CD-ROM
		1066 MHz	Watchdog Timer	255 levels. 1~255 sec.

I/O Connector	2 x RS-232 (COM 2/3)	
	1 x RS-232/422/485 (COM 1)	
	2 x IEEE 1394a	
	4 x USB 2.0	
	2 x PS/2 keyboard/mouse	
	2 x 10/100/1000Mbps Ethernet	
	1 x DVI-I for display (a converter for DVI-I to VGA is	
	included)	
	1 x Audio (Mic-in/Line-out)	
Expansion Interface	2 x PCI slot	
Touchscreen	Resistive type	
	Light Transmission 79%	
	1 million activations (typical) at a single point	
Power supply	100 ~ 240Vac, 250W	
Dimensions	420 mm (16.54") (W) x 149.4 mm (5.88") (D) x 335 mm (13.19") (H)	
Weight (net/gross)	6.6 kg (14.6 lb)/10 kg (22.0 lb)	
Environment	Operating temperature: 0°~ +40°C (32°~ 104°F)	
	Relative humidity: 10 ~ 95% @ 40°C, non-condensing	
	Operation vibration: 1.0G, 5~500Hz, random	
Certification	CE	

Ordering Information

PANEL1153-841-R 15" TFT Intel® Core™2 Duo panel PC with 2 PCI slots

Optional Accessories

82211530050E	2 x 3.5" HDD kit
82211580080E	2 x 2.5" HDD kit
82211530110E	Wireless LAN kit
82261580070E	Rack mount kit

Optional OS Installation

Windows® 2000/XP/Vista/7

Overviev

Digital Signage

Healthcare & Medical Solution > Medical Panel

Healthcare & Medical Solutions
> Medical Grade

Fanless & Heavy-duty Tou Panel Computer

Touch Panel Computers for


Industrial Touch Panel Computers & Monitors > Industrial Touch Panel Computers

Industrial Touch Panel Computers & Monitors > Industrial Touch Panel Monitors

Open Frame Pane Computers

Accessorie

Dimensions

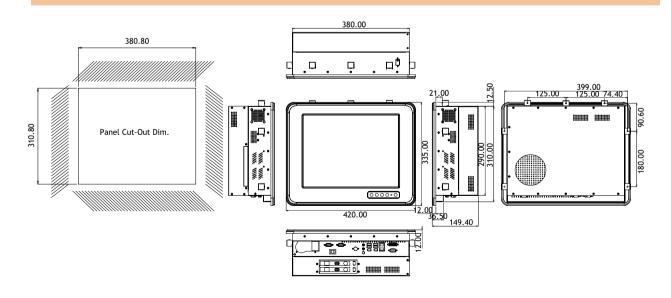

^{*} Specification and certifications are based on options and may vary.