
PANEL1158-831

15" TFT Slim Intel® Core™2 Duo Industrial Panel Computer





- 1. IEEE 1394a
- 4. PS/2 KB+MS x 2 7. USB 2.0 x 4 2. COM 2/3 (RS-232)
- 3. Power switch
- 6. Ethernet x 2
- 5. VGA
- 8. Audio (Mic-in/Line-out)
- 9. COM 1 (RS-232/422/485)



Features



- 15" XGA TFT LCD display
- Intel® Core™2 Duo processor
- Industrial-grade material front bezel: anti-corrosion
- Slim design: thickness 86.4 mm
- Built-in speakers & optional WLAN module
- Windows® Vista and 7 supported
- Supports panel mount, wall mount, rack mount, VESA arm, desktop stand



Side view

Introduction

The PANEL1158-831 is a 15" multi-media panel PC for Kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demand of multi-media application, the PANEL1158-831 supports Intel® Core™2 Duo processor and operating system of Windows® Vista, and is equipped with built-in speakers, two Gigabit LAN, IEEE 1394a and WLAN module for wireless network connection. This slim industrial panel PC is most suitable for kiosk, factory automation and more.

Powerful computing: Intel® Core™2 Duo processor
The PANEL1158-831 features Intel® Core™2 Duo and Intel® 945GME chipset which deliver high computing capability. The Mobile CPU offers reliable and stable performance for rugged environment.

Industrial-grade material front bezel

The PANEL1158-831 adopts industrial-grade material front bezel which incorporates the advantages of light weight, high degree of hardness, better heat releasing, easy-to-shape and anti-corrosion ability. Therefore, the PANEL1158-831 is especially suitable for most rugged industrial

Speaker & WLAN antenna supported

PANEL1158-831 features built-in speakers for kiosk application to display multimedia program. It also supports WLAN module (optional) & antenna for wireless network connectivity.

Specifications

Front Bezel	Industrial-grade material w/ IP65/NEMA 4 rugged protection		Chipset	Intel® 945GME + ICH7M/-DH
LCD Panel	Display Type	15" XGA TFT	System Memory	2 x 240-pin DDR2 DIMM max. up to 4 GB
	Brightness (cd/m²)	250 nits	BIOS	Phoenix-Award 4Mbit with RPL/PXE LAN
	Resolution	1024 x 768 pixels		Boot ROM, SmartView and customer
	Viewing Angle (H/V)	140°/120°		CMOS backup
Main system	CPU	Socket M for Intel® Core™2 Duo/ Core™	Storage	1 x 3.5" or 2 x 2.5" IDE/SATA HDD
		Duo/ Core™ Solo processor with FSB	Watchdog Timer	255 levels, 1~255 sec.
		533/667 MHz		

I/O Connector	2 x RS-232 (COM 2/3)
	1 x RS-232/422/485 (COM 1)
	2 x IEEE 1394a
	4 x USB 2.0
	2 x PS/2 keyboard/mouse
	2 x 10/100/1000Mbps Ethernet
	1 x VGA
	1 x Audio (Mic-in/Line-out)
Touchscreen	Resistive type
	Light Transmission 79%
	1 million activations (typical) at a single point
Power supply	100 ~ 240VAC, 180W
Dimensions	420 mm (16.54") (W) x 86.4 mm (3.40") (D)
	x 335 mm (13.2") (H)
Weight (net/gross)	5.5 kg (12.1 lb)/9.3 kg (20.5 lb)
Environment	Operating temperature: 0°C ~ +45°C (32° ~ 113°F)
	Relative humidity:: 10 ~ 95% @ 40°C, non-condensing
	Operation vibration: 1.0G, 5~500Hz, random
Certification	CE

Ordering Information

PANEL1158-831-R 15" TFT slim Intel® Core™2 Duo industrial panel PC

Optional Accessories

E202003330	VM-101 (VESA ARM clamp type)
E202003329	VM-105 (VESA ARM wall-mount)
82211580080E	2 x 2.5 HDD kit
82211580090E	VESA/Wall mount kit
82211530110E	Wireless LAN kit
82261580070E	Rack mount kit

Optional EOS Installation

Windows® XP Embedded
Windows® CE.NET

Optional OS Installation

Windows® 2000/XP/Vista/7

Overvie

Digital Signage

Healthcare &
Medical Solutions
> Medical Panel
Computers

Healthcare & Medical Solutions
> Medical Grade

Fanless & Heavy-duty Touc Panel Computers

Touch Panel Computers for


Industrial Touch Panel Computers & Monitors > Industrial Touch Panel Computers

Industrial Touch Panel Computers & Monitors > Industrial Touch Panel Monitors

Open Frame Pane Computers

Accessories

Dimensions

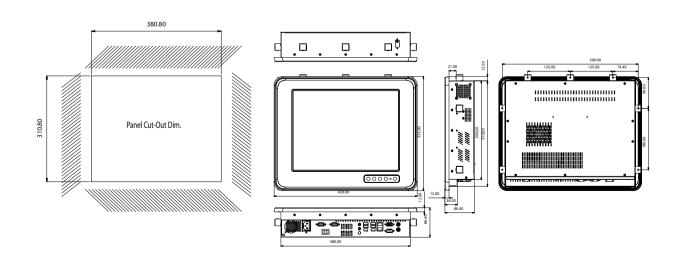

^{*} Specification and certifications are based on options and may vary.