


Display Characteristics

Model No.	NTP420B0	Resolution	1920x1080 (Full HD)
Active Screen Size	42.02 inch	Brightness	350 cd/m ²
Display Area	930.24x523.26 mm	Contrast Ratio	3000:1
Display Ratio	16:9	Viewing Angle (L/R/U/D)	89°/89°/89°/89°
Backlight Unit	LED backlight	Response Time	6.5 msec
Pixel Pitch	0.4845x0.4845 um	Surface Treatment	Anti-Glare, Haze=2%
Operation Temp.	0~50°C	Panel Grade	A grade (0 bright dot)

General Specification

Speaker	10Wx2	Dimension	989.2x629.14x55.1 mm
Wall Mount Holes	VESA standard	Net Weight	25.6 Kg
Housing Material	Galvanized Steel (SECC)	Other connectors	Audio-in
Display interface	VGA, DVI, HDMI		

Dimension

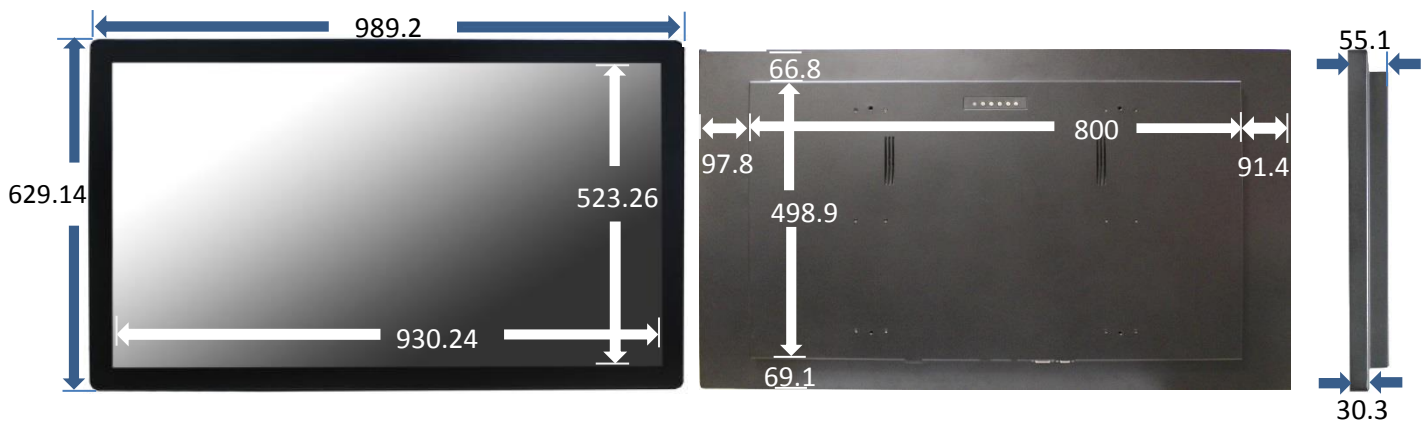

Features :

- ★ Projected Capacitive touch screen(10 points)
- ★ Easily touching the edge without obstruction.
- ★ Diverse Installing Options
- ★ Made in Taiwan
- ★ Matel enclosed cabinet




Touch Specification			
Type	No Touch	Model No.	NTP4200

Type	Projected Capacitive	Model No.	NTP420B
Allowed touch points	10 points	Transparency	≥86%
Interface	USB	Hardness	≥7H
Operating Temp.	-30°C~70°C	Haze	≤2%
Minimun Distance Between 2 points : 27mm			


Customized Options			
Brightness	700 cd/m ²	Surface Splash Proof	Option
Surface Protection	Tempered glass	Color	Any Color (MOQ requested)
Coating Film	AG/AR/AF	Panel Mount Bezel	Customized Option
Open-frame bracket	Option		

Supported OS	
OS	Version
Windows	Win8, Win7 , Vista, XP, Embedded XP, Win2000, CE.NET 4.x ↑
Linux	Kernel 2.6.24 ↑
Android	3.0 ↑
Mac	10.5.x ↑ (Intel CPU)

Open-frame Brackets (option)

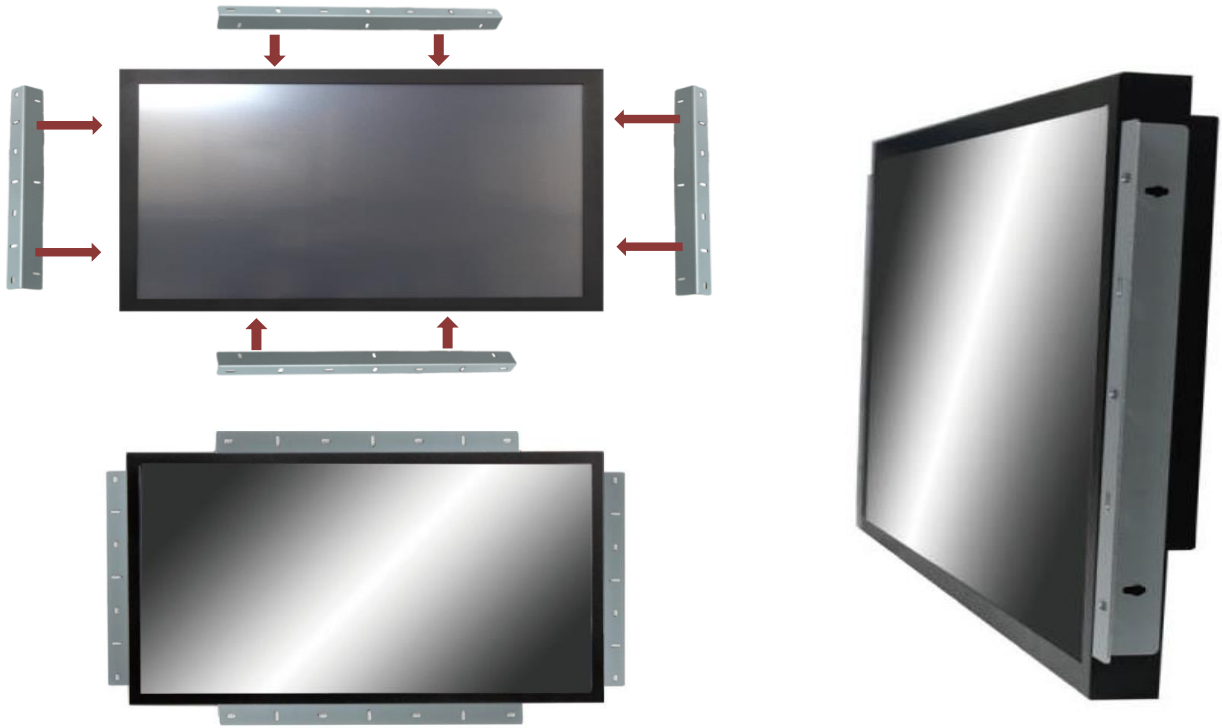

Wall Mount Brackets (option)

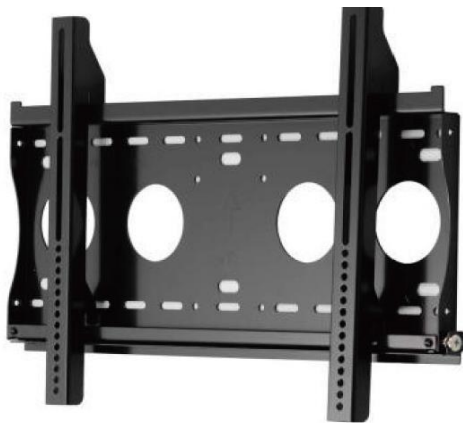

Cart Stand (option)

