

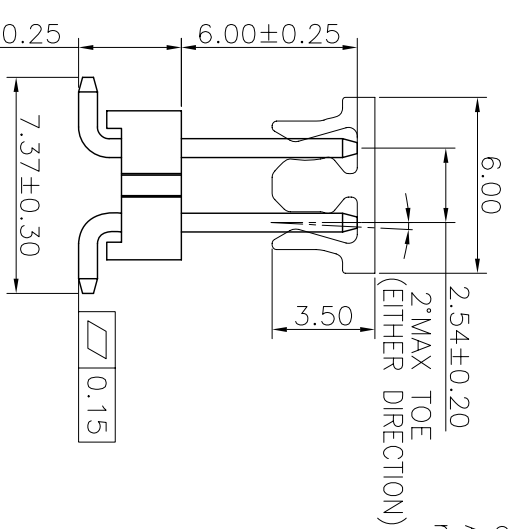
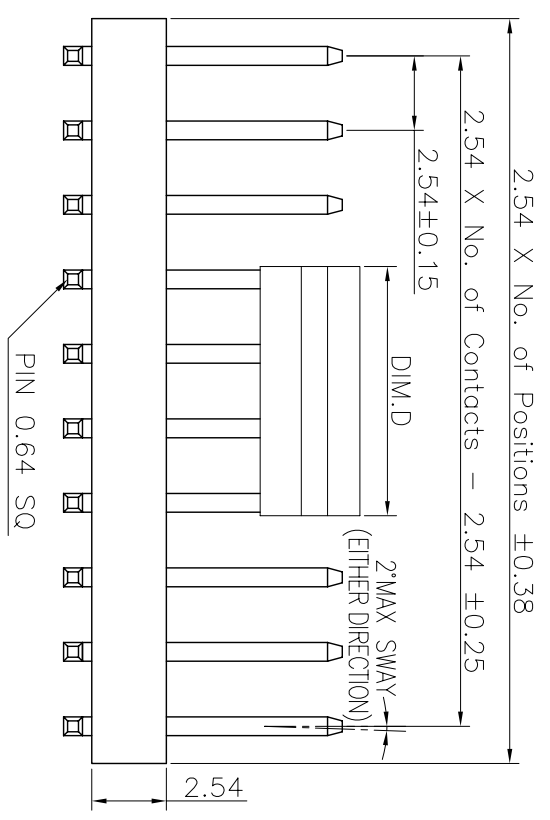


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.05.22	吳才仙

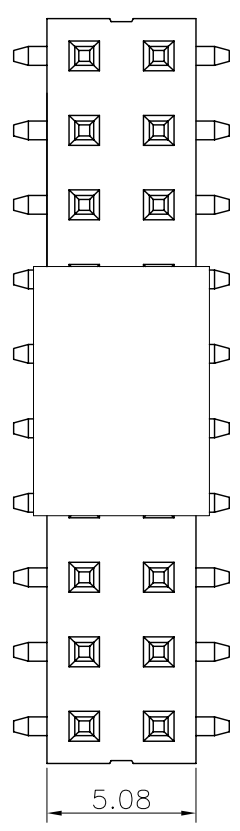

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩmin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Hdlogen Free) or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

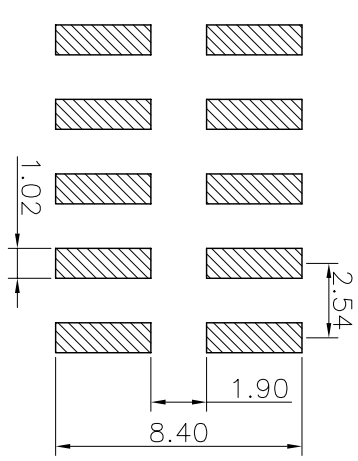

Dim.D	NOTE
5.00	02Pins
6.00	03~08Pins
8.50	09~40Pins

Standard Packing
 C=Tube
 Selective Packing
 A=Box
 E=Cap+Tube
 F=Cap+Tube&Reel

Color
 1=Black

Standard Plating
 02=Gold Flash
 Selective Plating
 01=Tin
 05=Gold Flash/Tin

Ordering Information

G PHC201 - XX XX A 002 R 1

No. Of Pins Per Row
 02~40

PIN 0.64 SQ

格菱股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	GENERAL TOLERANCE
01	mm	4:1	1/1	X.±5.0° X.±3.0° .XX±2.0° .XXX±1.0°

DESIGN:	DATE:	DWG. NO.	TITLE:
吳才仙	2013.05.22	GPHC201-CA2RB	2.54 PIN HEADER
劉北平	2013.05.22		DUAL ROWS SMT TYPE
林萬輝	2013.05.22		BASE 2.54H
李輝	2013.05.22	GPHC201-XXXX A002R1BX	

CHECKED:	DATE:	PART NO.
劉北平	2013.05.22	GPHC201-XXXX A002R1BX
AUDITED:	DATE:	
林萬輝	2013.05.22	
APPROVED:	DATE:	
李輝	2013.05.22	