


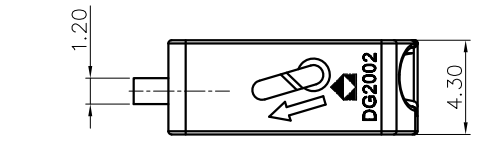




REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE




01P

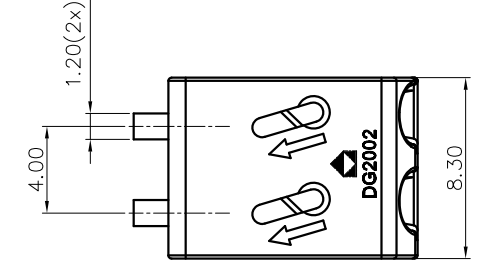


02P

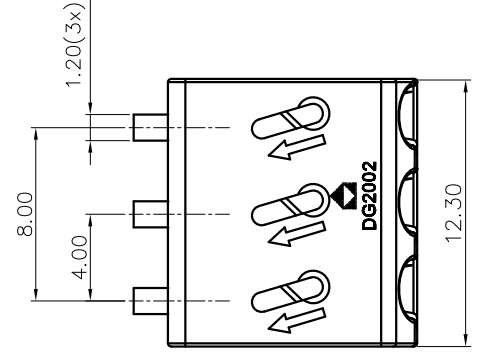

03P

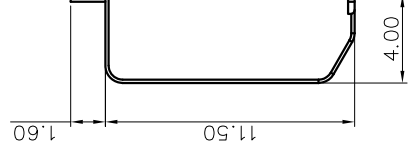

02P/03P

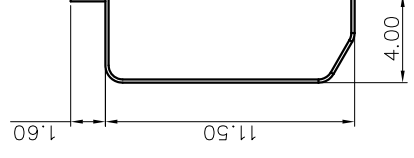

01P

NOTES1:  
UL Standard

1. Rated Voltage/Current : 600V/9A(01P)  
300V/9A(02P/03P)
2. Wire Range : 24~18AWG

IEC Standard

NOTES2:



1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 4.00mm, Poles : N=01~03P
3. Stripping length : 9mm
4. Operating temperature : -40°C~+130°C
5. Undimensioned Tolerances:

Pollution degree	3	2	2
Overvoltage category	III	III	II
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	32V	160V	160V
Rate current(A)	9A		

2. Wire Range : 0.2~0.75mm<sup>2</sup>

Pitch range in mm	Nominal dimension range		
	Over	TO	Over
6	10	30	100
TO	TO	TO	TO
6	10	30	100
±0.15	±0.20	±0.30	±0.50
			±0.70
			±1.00
			±1.30
			±2.0

6. RoHS Compliance

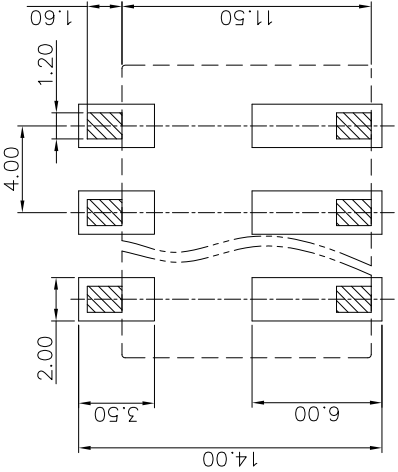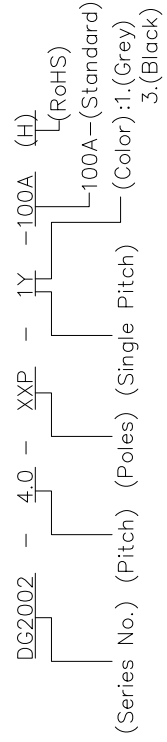

PCB LAYOUT

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: 宁波高松电子有限公司
CHKD:	/	NAME: DG2002-4.0-XXP-1Y-100A(H)
DRFT:	/	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION		REV DO
DRAWING NO.:		1/1
DO NOT SCALE		SHEET SCALE
1:1		1:1