
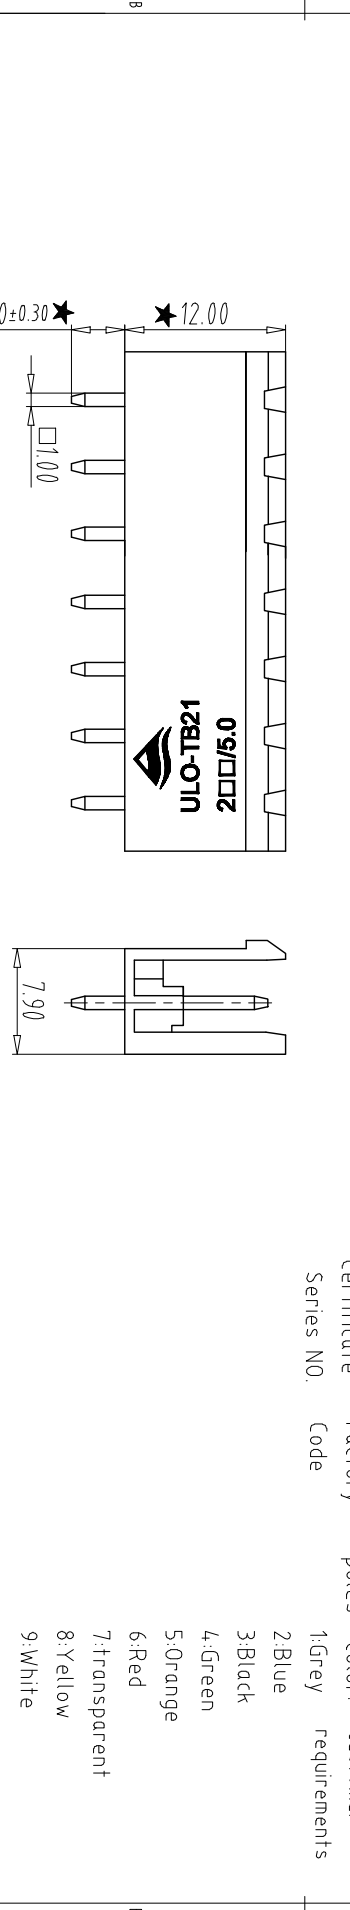


REV	ECN NO.	2	CONTENT	CHK	DATE
-----	---------	---	---------	-----	------

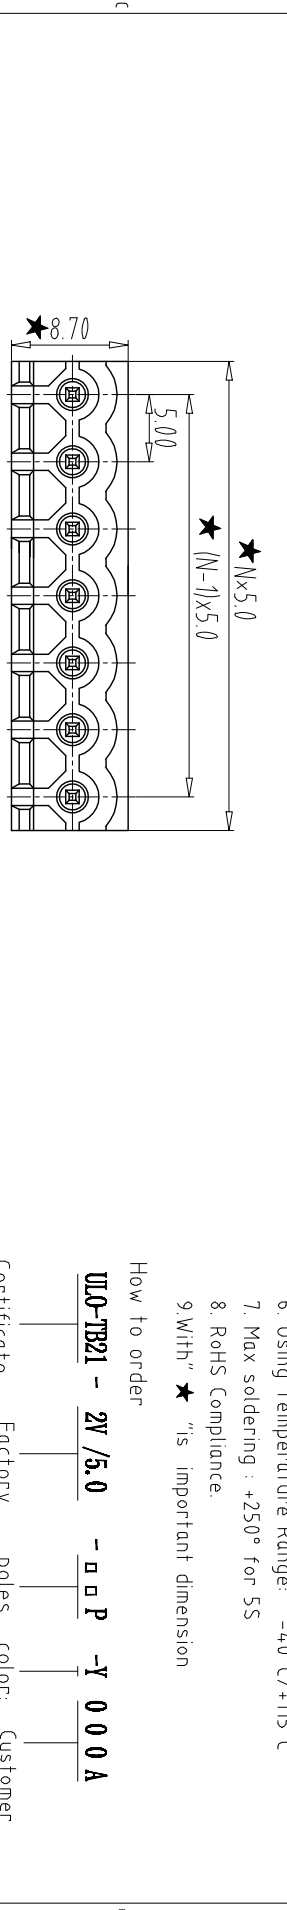

- NOTES:
1. Rating: 300V/16A <IEC> 320V/20A
 2. Poles: 02-24P
 3. Insulation Withstands Voltage: AC2000V/1 Min
 4. Contact resistance: 20mΩ
 5. Insulation Resistance: 500MΩ at DC500V
 6. Using Temperature Range: -40°C/+115°C
 7. Max soldering : +250° for SS
 8. RoHS Compliance.
 9. With" ★ "is important dimension

How to order
ULO-TB21 - 2V /5.0 - □ □ P -Y 0 0 0 A

Certificate Factory poles color: Customer requirements
 Series NO. Code

- 1: Grey
- 2: Blue
- 3: Black
- 4: Green
- 5: Orange
- 6: Red
- 7: transparent
- 8: Yellow
- 9: white

Total Pitch Tolerances		Nominal dimension range		T	±	—	//													
in mm		in mm																		
0	30	53	70	90	115	150	280	250	0	30	53	70	90	115	150	200	250	0	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3
6																				

2	Solde pin	314.0000011/12	N	BRASS	Sn Plated
1	Housing	403000124.0	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DATE	18.10.17	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	ULO-TB21-2V/5.0-XXP-Y000A	



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO: ULOTB21Y000A