




CONSTRUCTION

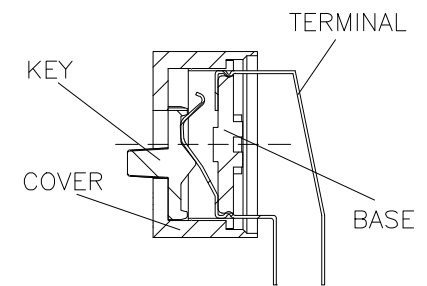

NOTES:
1.Materials

ITEM	DES	MATERIALS	TREATMENT
1	COVER	UL94V-0 PBT High Thermoplastic	Red Blue Black
2	BASE	UL94V-0 PBT High Thermoplastic	BLACK
3	KEY	UL94V-0 Nylon High Thermoplastic	WHITE
4	TERMINAL	Phosphor bronze	Plating Gold

- 2.Technical parameters
- 1>Operation force: 1000gf Max
 - 2>Mechanical life: 2000 operations
 - 3>Operating temperature: -40° to+85°
Storage temperature: -40° to+85°
 - 4>Non-Switching Rating:100mA,50VDC
Switching Rating:25mA,24VDC
 - 5>Contact resistance(initial):≤50mΩ max
Contact resistance(after life test):≤100mΩ
 - 6>Circuit:SPST
 - 7>Resistance to soldering heat:260±5°(500°F) for 5±1seconds
 - 8>Do not wash the switch body except top tape sealed type,which suitable for spray cleaning method from top of the s/w



PCB LAYOUT

SCHEMATIC (TYP.): 2POS

