

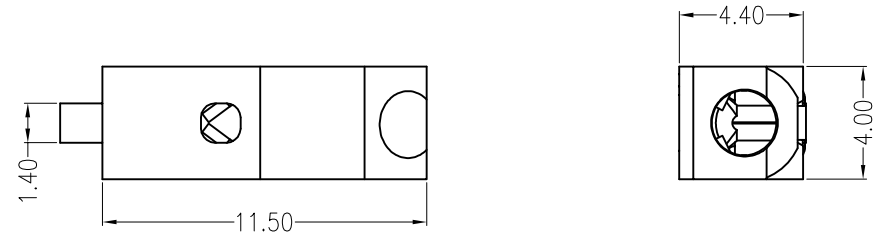
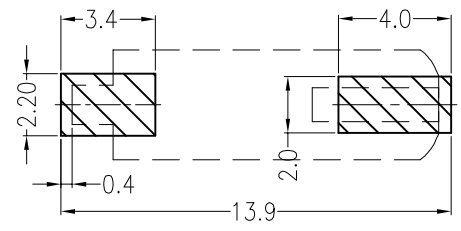


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.03.23

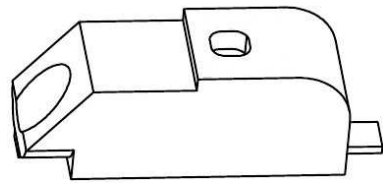

主要技术参数 Main Specifications

线 数 (Poles): 01 to 03P
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
 额定电压 (Rated voltage): 275V AC DC
 额定电流 (Rated current): 6.0A AC DC
 耐 电 压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$

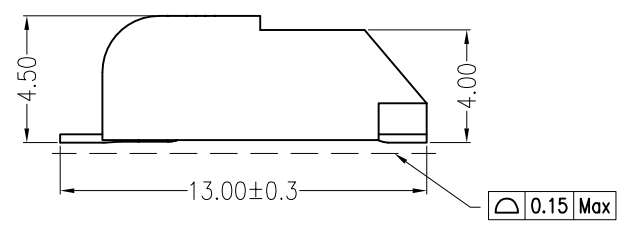

Board Layout

C					
B	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
LEDsconn					TITLE: - 4.0mmPITCH 90°WAFER SMT TYPE
X.±0.5	X.±5'	USE:	CUSTOMER		
.X±0.3	.X±2'	APPD:	邵敬和		
.XX±0.25	.XX±1'	CHKD:	田峰		
--	--	DR:	吴丹平		
UNITS: mm		DR:	吴丹平		SCALE: 1 : 1
				SHEET: 1 / 1	