

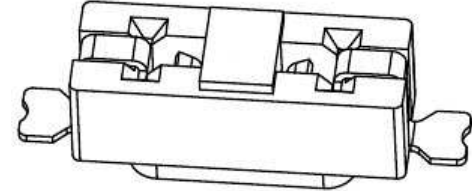
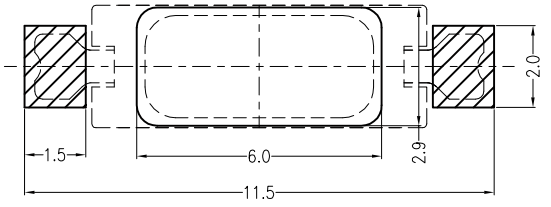
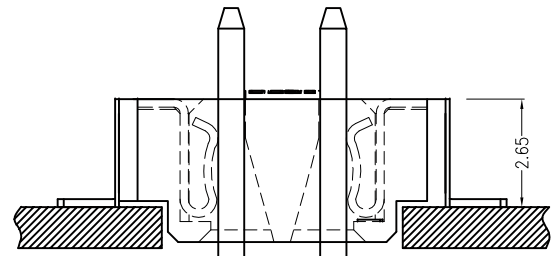


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30




主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range):  $-40^{\circ}C \sim +120^{\circ}C$

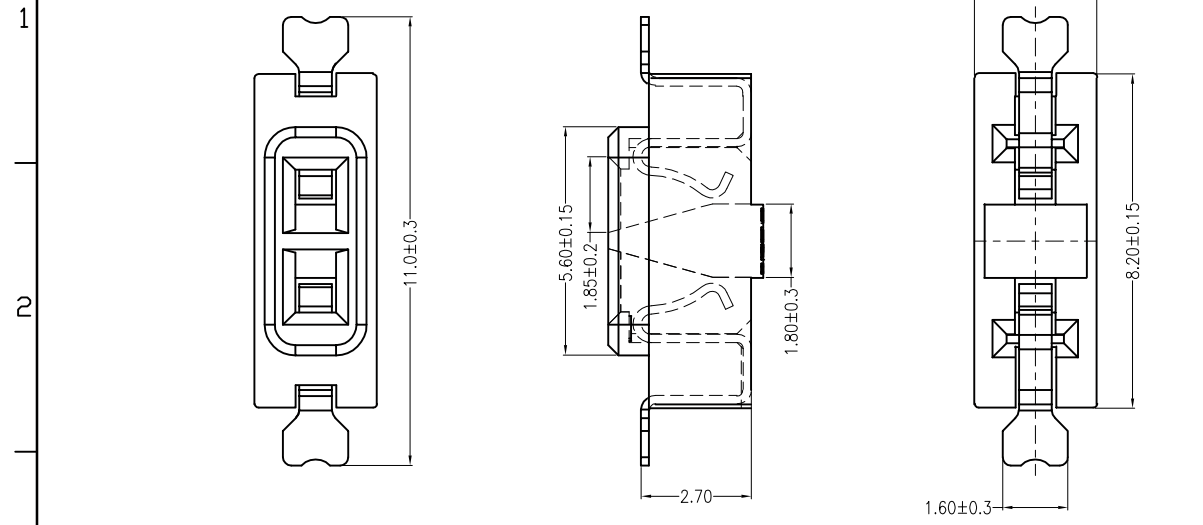

Board Layout  
General Tolerance:  $\pm 0.05$



Assembly Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

<b>LEDscconn</b>			TITLE: -	
			2.5mmPITCH 180°WAFER SMT TYPE	
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2°			
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰		
UNITS: mm		DR: 吴丹平	SCALE	SHEET
			1 : 1	1 / 1