

A

B





C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release		2013.08.05

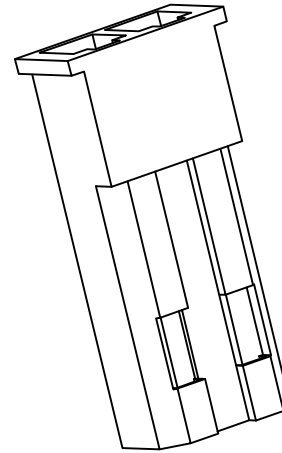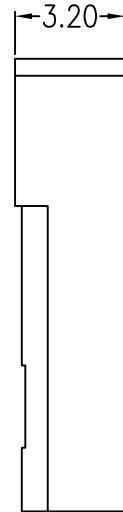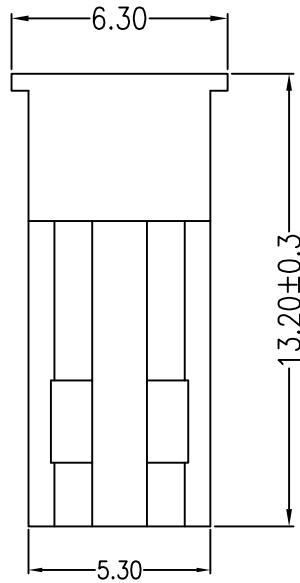

### Main Specifications

Poles : 02

Contact resistance :  $\leq 20\text{m}\Omega$


Insulation resistance :  $\geq 1000\text{M}\Omega$

Rated voltage : 250V AC DC

Rated current : 3.0A AC DC

Withstand voltage : 1000V AC/minute

Temperature Range :  $-25^{\circ}\text{C} \text{ --- } +85^{\circ}\text{C}$

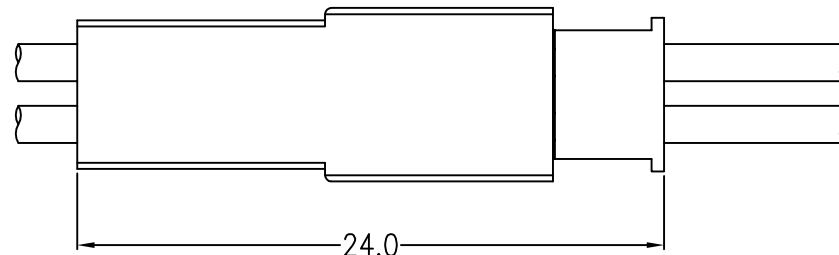

Assembly Layout

C					
B					
A	PEDESTAL		1 PCS	PA66	
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
<b>LEDsconn</b>					TITLE: -
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2'	APPD:		DWG NO.:	
.XX±0.25	.XX±1'	CHKD:		SCALE	
--	--	DR:		1 : 1	SHEET
UNITS: mm				1 / 1	

1

2

3

4

5

1

2

3

4

A

B

C

D

E

F