

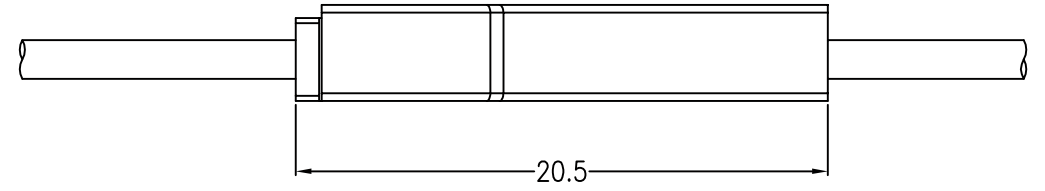
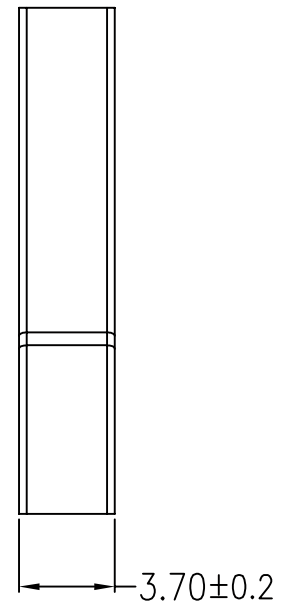
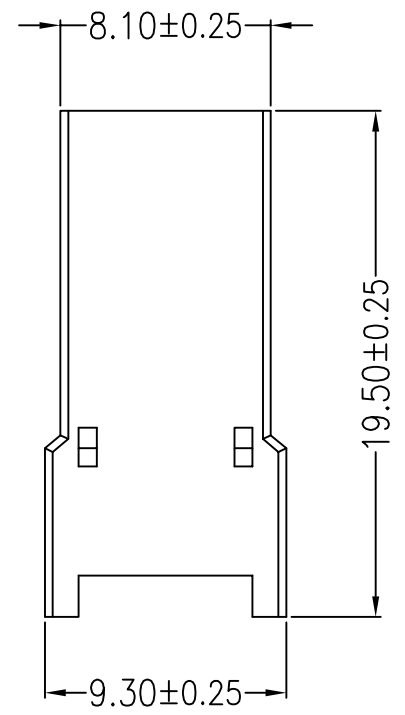


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		NEW RELEASE		2017.03.25

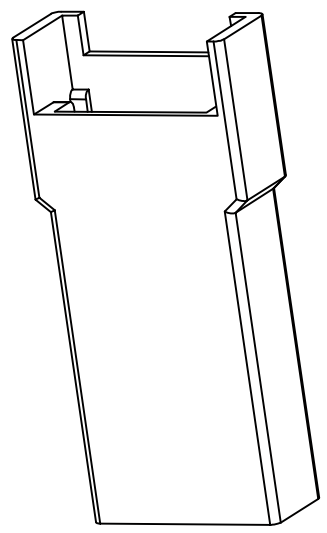

Main Specifications
 Poles : 02 to 05
 Contact resistance : $\leq 20\text{mOhm}$
 Insulation resistance : $\geq 1000\text{MOhm}$
 Rated voltage : 600V AC DC
 Rated current : 1A AC DC
 Withstand voltage : 1800V AC/minute
 Temperature Range : $-25^{\circ}\text{C} \text{ --- } +85^{\circ}\text{C}$



C					
B					
A	HOUSING		1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
LEDsconn					TITLE: C4001R 4.0mm PITCH HOUSING
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2'	APPD:		DWG NO.:	
.XX±0.25	.XX±1'	CHKD:		SCALE	
--	--	DR:		1 : 1	SHEET
		UNITS: mm			1 / 1