

FILE: 2016-D02\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		初版成	Liu Lian	18.03.30

NOTES:




1. Rating: 300V/15A
<IEC> 250V/15A
2. Poles: 02-24P
3. Insulation Withstands Voltage: AC2000V/1 Min
4. Screw Torque Value: 0.4Nm
5. Insulation Resistance: 500MΩ at DC500V
6. Using Temperature Range: -40°C/+115°C
7. Suitable Electric Wire: 12-26AWG(UL) 0.2-2.5mm²(IEC)
8. Strip length: 7-8mm
9. ROHS compliance
10. With "★" is important dimension

How to order

ULO-TB25 - 330/5.0 - XXP - Y 0 0 0A

Certificate Factory poles color: Customer
Series NO. Code requirements

1: Grey
2: Blue
3: Black
4: Green
5: Orange
6: Red
7: transparent
8: Yellow
9: White

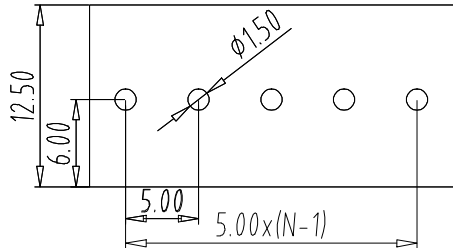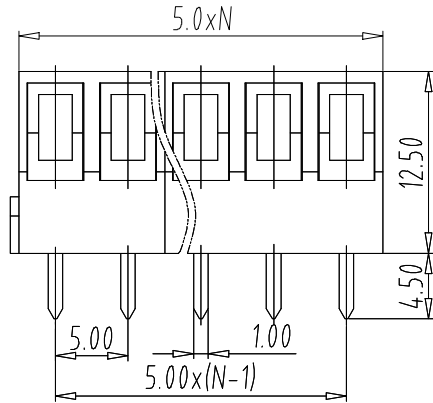

PCB LAYOUT

4	SCREW	3160000033	N	STEEL	M2.5/Zn Plated
3	Solder Pin	3110000010	N	Brass	Tin Plated
2	BLOCK	3090000013	N	Brass	Ni Plated
1	HOUSING	4050000510(03P)	XX	PA66(V0)	/
		4050000510(02P)	XX		
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	Liu Lian	DATE	18.03.30	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB25-330/5.0-XXP-Y000A
				DWGNO.	ULOTB71Y010A

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	=	-	//			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	320	0	30	53	70	90	115	150	200	250	320	0	10	all	0	100	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5			