

1 2 3 4 5 6 7 8 9

G

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

F

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

E





D

C

B

A

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

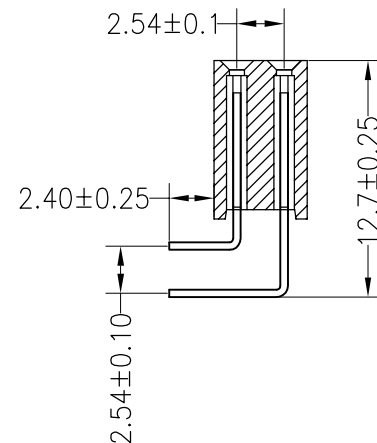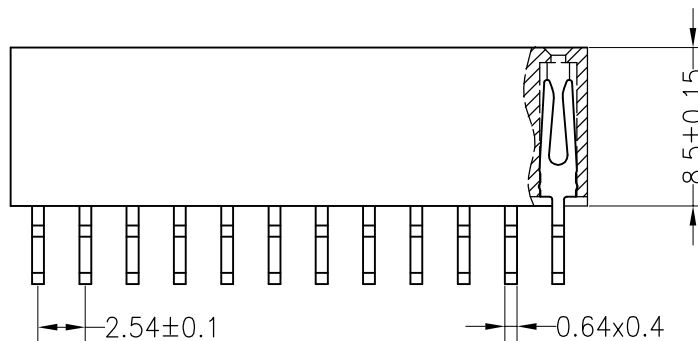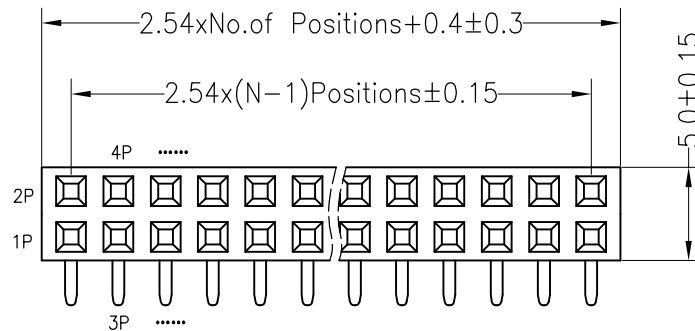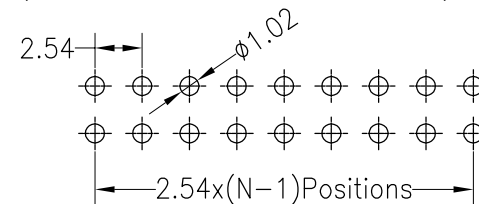

OPERATION					
.X	±0.30	DRAW			
X.XX	±0.20	CHECK			
X.XXX	±0.10				
Angle	±3°	APPROVE			
DIM	TOL				

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	◆

Conntherm

PART NO.	
TITLE:	2.54PF H8.5mm 2xNpin 90° L11.5/16.5mm

A0	2012.03.28	NEW DRAWING
REV	DATE	MODIFICATION DESCRIPTION
1		

CHANGE

APPROVE

1 2 3 4 5 6 7 8 9

G

F

E

D

C

B

A