

FILE: 2021-D01VULO

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard




1	Pollution Degree	2
	Overvoltage Category	II
	Rated Impulse Voltage(kV)	4.0kV
	Rate Voltage(kV)	320V
	Rate Current(A)	20A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Red copper(Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

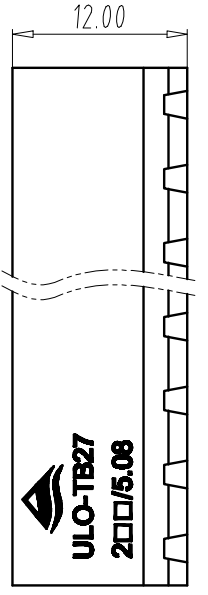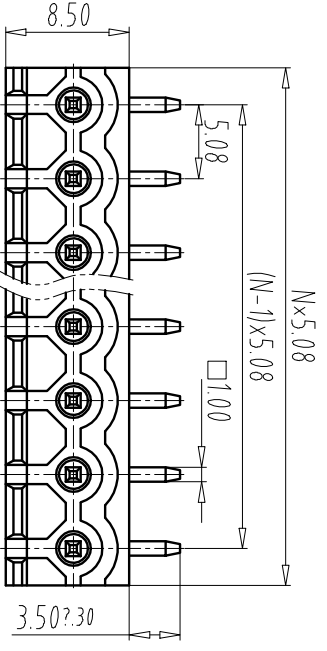

How to order
 ULO-TB27 - 2R/5.08 - XXP - Y 0 0 0 A
 Certificate Factory poles
 Series NO. Code
 Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:Transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances		Nominal dimension range	
in mm	over	in mm	over
0	to	0	to
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
200	to	200	to
250	to	250	to
300	to	300	to
320	to	320	to
±0.18	±0.20	±0.35	±0.44
±0.25	±0.3	±0.55	±0.70
±0.3	±0.35	±0.75	±0.25
±0.35	±0.44	±0.30	±0.35
±0.44	±0.55	±0.44	±0.55
±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.2	0.3
0.3	0.3	0.2	0.3
0.2	0.3	0.2	0.3
0.3	0.5	0.2	0.3

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.28	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	ULO-TB27-2R/5.08-XXP-Y000A		
					UL0TB27Y000A