

# SPECIFICATION FOR APPROVAL

## 產品規格承認書

CUSTOMER NAME 客戶名稱	<b>Maritex</b>
CUSTOMER MODEL 客戶型號	<b>Project - Z3OC1T8219731</b>
PRODUCT NAME 產品名稱	<b>SMD VIBRATION MOTOR 貼片式振動電機</b>
PRODUCT MODEL 產品型號	<b>S3Z06B821-731</b>
FILE NUMBER 文件編號	<b>SVM-3Z06B821-731</b>
REV. 版 / 次	<b>A/1.0</b>

CUSTOMER APPROVED 客戶確認	CHECKED 核對	INSPECTION 審查	APPROVAL 批准	DATE 日期
APPROVED 本公司確認	DRAWN 編制	CHECKED 審核	APPROVAL 批准	DATE 日期
	Jelly	May Qiu	Ricky Chang	2022-12



賽寶科技有限公司  
賽博科技股份有限公司  
SAIBOW TECHNOLOGY CO., LTD.

Rm1505, Rende Pavilion, Jindixingyuan, E'ling South Road, Huicheng,  
Huizhou, Guangdong, P.R. CHINA 516008

Tel): +86 138 265 99590 ; WhatsApp: +86 13926511900








E-mail): sales@saibow.com

Website): https://saibow.com



✔ Your QR code was successfully created!  
Signup for a FREE account.  
- Powerful analytics (QR scanning stats: countries, devices, referrers...)  
- Weekly report via Email (beta)  
- Easy and comfortable interface for managing and analyzing all your QR codes  
REGISTER

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>1 of 15</b>

Date	Originator	Version	Description of changes								
21.05.06	peng	01	Initial Spec Release								
											
<b>SAIBOW Technology Co., Ltd</b> 2F., kaizhong Smart Park, No. 8, Hua'an Road, Z hongkai Hi-Tech, HuiCheng District, Huizhou, Gu angdong, P.R.C			<table border="1"> <tr> <td>Approval</td> <td>Exam</td> <td>Check</td> <td>Design</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table>	Approval	Exam	Check	Design				
Approval	Exam	Check	Design								
											

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without SAIBOW's written consent.

<b>MATERIAL or METHODS Specification</b>		<b>S3Z06B821-731</b>	
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>2 of 15</b>

## Preface:

Thank you very much for your selecting the SAIBOW vibrator. Our products have stable performance. To obtain maximum performance from the product, please read this specification first, and keep it handy for future reference.

## Attention:

Copyright © SAIBOW. This material, including documentation and any related computer programs, is protected by copyright controlled by SAIBOW. All rights are reserved. Copying, including reproducing, storing, adapting or translating, any or all of this material requires the prior written consent of SAIBOW. This material also contains confidential information which may not be disclosed to others without the prior written consent of SAIBOW Company.

---

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without SAIBOW's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>3 of 15</b>

## TABLE OF CONTENTS

SECTION	DESCRIPTION	PAGE#
1.	SCOPE.....	4
2.	MECHANICAL CHARACTERISTIC.....	4
3.	ELECTRICAL CHARACTERISTICS.....	4
4.	ADDITIONAL INFORMATION.....	5
5.	CRITICAL CHARACTERISTICS.....	5
6.	ENVIRONMENTAL CHARACTERISTICS.....	5
7.	RELIABILITY TESTS.....	5
8.	EXPECTED SHIPPING AND STORAGE CONDITIONS.....	7
9.	QUALITY ASSURANCE.....	7
10.	MATERIALS.....	8
11.	LOT NO. INDICATION ON THE VIBRATOR.....	8
12.	PACKAGING CONDITION .....	9
13.	RECOMMENDED REFLOW PROFILE FOR VIBRATOR.....	12
14.	NOTES ON USE.....	13
	APPENDIX 1 .....	14
	APPENDIX 2 .....	15

---

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>4 of 15</b>

## 1. SCOPE


This document contains specific electrical and mechanical characters, critical characteristics, reliability tests, packaging condition, quality assurance, reflow profile and etc..

## 2. MECHANICAL CHARACTERISTIC

2.1.Mechanical drawing	See appendix 2
2.2.Axial play of shaft	0.3 mm Max
2.3.Counter weight density:	17.0 g / cc Min
2.4.Mechanical noise of motor operating at rated speed:	50 dB Max A-weighting
Background noise 26dB.(Measured distance 10 cm, see appendix 1).	

## 3. ELECTRICAL CHARACTERISTICS

3.1. Vibrator positioning:	Horizontal
3.2. Operating voltage:	2.7 V
3.3. Operating voltage range:	2.3– 3.2V
3.4. Load current at operating voltage:	75 mA Max
3.5. Starting current at operating voltage:	90 mA Max
3.6. Insulation resistance and voltage break down:	at 50V DC, 1M $\Omega$ Min and above
3.7. Terminal resistance:	33.0 $\pm$ 4.0 $\Omega$
3.8. Load speed:	14000 $\pm$ 3000 rpm
3.9. Rotation direction:	C.W. & C.C.W
3.10. RPM Rise time (see picture 1)	60ms Max
3.11. RPM Fall time (see picture 1)	80ms Max

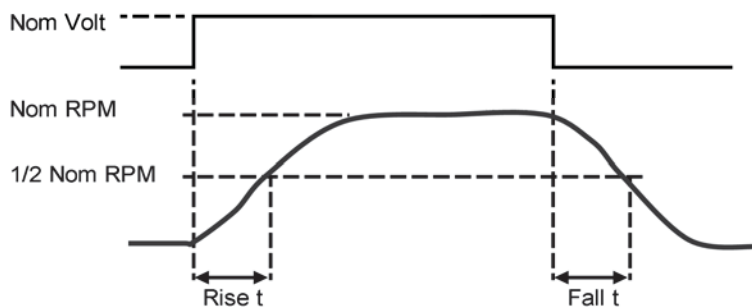

Picture 1 RPM rise and fall time

- 3.12 Standard loaded starting voltage: Under standard loaded condition, towards C.W. rotor shall move in all position at 2.3V (counterweight should be turned slowly at 360°)

All mechanical and electrical measurements should be measured at room temperature and ordinary humidity.

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>5 of 15</b>

#### 4. ADDITIONAL INFORMATION

- 4.1. Vibrator weight 0.63g
- 4.2. Pull out strength of counter weight and shaft 30N Min
- 4.3. Acceleration level at nominal RPM (Grms) (test jig mounted in freely suspended)
- 4.4. Speed and current variation (function of temperature, -20°C to +70°C)

#### 5. CRITICAL CHARACTERISTICS

- 5.1. Functional dimensions
- 5.2. Rated current at specified rotating speed
- 5.3. Operating speed at operating voltage
- 5.4. Starting current at operating voltage
- 5.5. Min. starting Voltage

#### 6. ENVIRONMENTAL CHARACTERISTICS

- 6.1. Operating temperature ranges: -20°C to +70°C
- 6.2. Storage temperature ranges: -40°C to +85°C



#### 7. RELIABILITY TESTS

7.1 We have already performed reliability tests and measure nom rotation speed, nom load current, nom resistance, nom starting currents and nom starting voltage before and after tests, please check following table1 for detail reliability test information. Each test we use at least 10 samples for verification.

	Items	Test conditions	Judgment
7.2	Low temperature storage test	Storage test -40±3°C/96h, recovery 1~2h Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.3	High temperature storage test	Storage test 80±3°C/96h, recovery 1~2h Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>6 of 15</b>

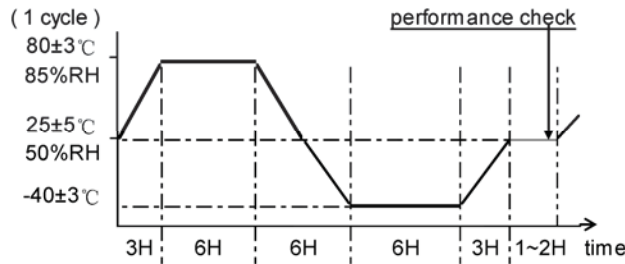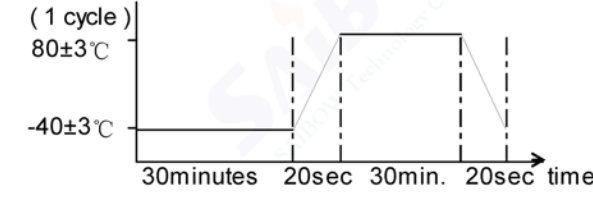7.4	Temperature cyclic test	<p>Storage test Temperature &amp; humidity: <math>+80\pm 3^{\circ}\text{C}/6\text{h}(\text{RH}85\%)</math>; <math>-40\pm 3^{\circ}\text{C}/6\text{h}</math> with 6h maximum transition time between temperatures. 24h/cycles, totally 6 cycles. Recovery 1~2h. Performance check daily. Measurements with test jig.</p>  <p>(1 cycle) 80±3°C 85%RH 25±5°C 50%RH -40±3°C 3H 6H 6H 6H 3H 1~2H time</p>	No mechanical damage. Reduced performance of vibrator. (Max +/-30% variation of nom RPM)
7.5	Thermal shock test	<p>Storage test Temperature &amp; humidity: <math>-40\pm 3^{\circ}\text{C}/30\text{minutes}</math>; <math>+85\pm 3^{\circ}\text{C}/30\text{minutes}</math> with a 20sec maximum transition time between temperatures. 1h/cycle, totally 50 cycles. Recovery 1~2h. Measurements with test jig.</p>  <p>(1 cycle) 80±3°C -40±3°C 30minutes 20sec 30min. 20sec time</p>	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.6	Room temperature lifetime test	<p>Operational test: apply operating voltage Temperature &amp; humidity: <math>25\pm 3^{\circ}\text{C}</math>, RH 50% On/off time: 2.5s on/off, 300,000 cycles. Performance check: before, after test and every 20,000 cycles. Recovery 1-2h. Measurements with test jig.</p>	No mechanical damage. <u>After 100,000cycles:</u> Normal performance of vibrator. (Max +/-30% variation of nom RPM) <u>After 300,000cycles:</u> The vibrator should operate.
7.7	High temperature lifetime test	<p>Operational test: apply operating voltage Temperature : <math>55\pm 3^{\circ}\text{C}</math> On/off time: 2.5s on/off, 53,000 cycles. Performance check: before, after test and every 20,000 cycles. Recovery 1~2h. Measurements with test jig.</p>	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.



<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>7 of 15</b>

7.8	Low temperature lifetime test	Operational test: apply operating voltage Temperature : -20±3°C On/off time:2.5s on/off, 53,000 cycles. Performance check: before, after test and every 20,000 cycles. Recovery 1~2h. Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)												
7.9	H <sub>2</sub> S corrosion test	Storage test Concentration: 3±1ppm Temperature & humidity: 40±3°C, RH 80% Exposure time: 24hours	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)												
7.10	Free Fall	Mount the vibrator in the dummy box.(dummy box weight 100g), Drop height 1.5 m onto concrete. 3 times in each 6 directions. Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)												
7.11	Random vibration test	<table border="1"> <tr> <td colspan="2">3axes, 10minutes per axis, 6.06Grms</td> </tr> <tr> <td>Frequency (Hz)</td> <td>A.S.D.(G<sup>2</sup>/Hz)</td> </tr> <tr> <td>20</td> <td>0.0098</td> </tr> <tr> <td>80</td> <td>0.04</td> </tr> <tr> <td>350</td> <td>0.04</td> </tr> <tr> <td>2000</td> <td>0.0069</td> </tr> </table> Measurements with test jig.	3axes, 10minutes per axis, 6.06Grms		Frequency (Hz)	A.S.D.(G <sup>2</sup> /Hz)	20	0.0098	80	0.04	350	0.04	2000	0.0069	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
3axes, 10minutes per axis, 6.06Grms															
Frequency (Hz)	A.S.D.(G <sup>2</sup> /Hz)														
20	0.0098														
80	0.04														
350	0.04														
2000	0.0069														
7.12	Shock test	Time of test and direction: 3times in each 6 direction. Total 18 times. Acceleration: Half-sinusoidal 500G Duration:2ms	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)												

Table1 Reliability test

## 8. EXPECTED SHIPPING AND STORAGE CONDITIONS

- |      |                               |                        |
|------|-------------------------------|------------------------|
| 8.1. | Relative humidity             | 15%~70%                |
| 8.2. | Temperature                   | -5°C~40°C              |
| 8.3. | Sulphur dioxide average       | 0.3 mg/m <sup>3</sup>  |
| 8.4. | Sulphuretted hydrogen average | 0.1 mg/ m <sup>3</sup> |
| 8.5. | Storage period                | 12 months              |
- (Vibrator has to be rotated at least once within 12 mouths from the date of receipt)

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.



<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>8 of 15</b>

## 9. QUALITY ASSURANCE

All critical parameters are 100% in control. The symbols "◆" apply to all parameters identified as critical parameters in all process. And before mass production approval, we use Process Capability Study (PCS) to conduct all critical parameters in mass production. Based on PCS the final quality controls will be agreed.

Quality assurance for mass production:

- Lot acceptance rate (LAR)
- First pass yield (FPY)
- Outgoing quality level
  - Each final packing containing Out-going inspection data sheet (n=35pcs)
  - Inspection item: Load speed
  - Load current
  - Starting current
  - Starting voltage
  - Coil resistance
- Customer reject material rate
- Customer satisfaction
- Cpk/Cp control for all critical parameters (except starting voltage)

## 10. MATERIALS

- Counterweight
- Brush
- Commutator
- Case
- Terminal
- Bracket
- Washer
- End cover
- Bearing
- Magnet
- Copper wire
- Shaft
- Core
- Varistor (optional)


## 11. LOT NO. INDICATION ON THE VIBRATOR

Following markings are the definition of lot no. indication on the vibrator, which including production code and date code; please see picture 2 as below for detail information:

---

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>9 of 15</b>

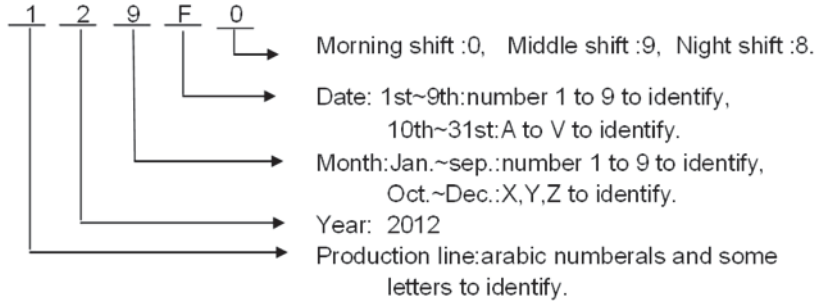


Date	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Lot No. Indication	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	J	K
Date	21	22	23	24	25	26	27	28	29	30	31									
Lot No. Indication	L	M	N	O	P	Q	R	S	T	U	V									
Date	V1	V2	V3	V4	V5	V6	V7	V8	V9	V10	V11	V12	V13	V14	V15	V16	V17	V18	V19	V20
Production line code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	J	K

Picture 2 Lot No. indication

**12. PACKAGING CONDITION**

A detailed mechanical drawing for packing condition as followed with dimensions and tolerances:

**12.1 Smallest packing**

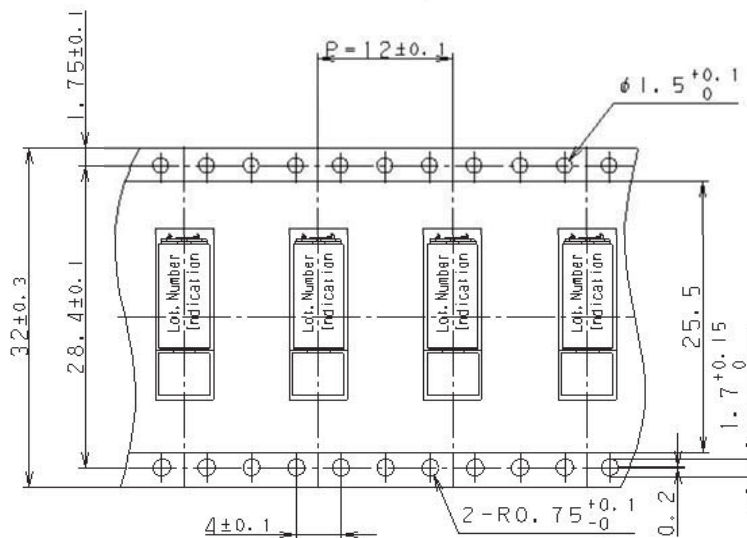


Picture 3 Smallest packing condition

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>10 of 15</b>

12.2 Reel packing condition

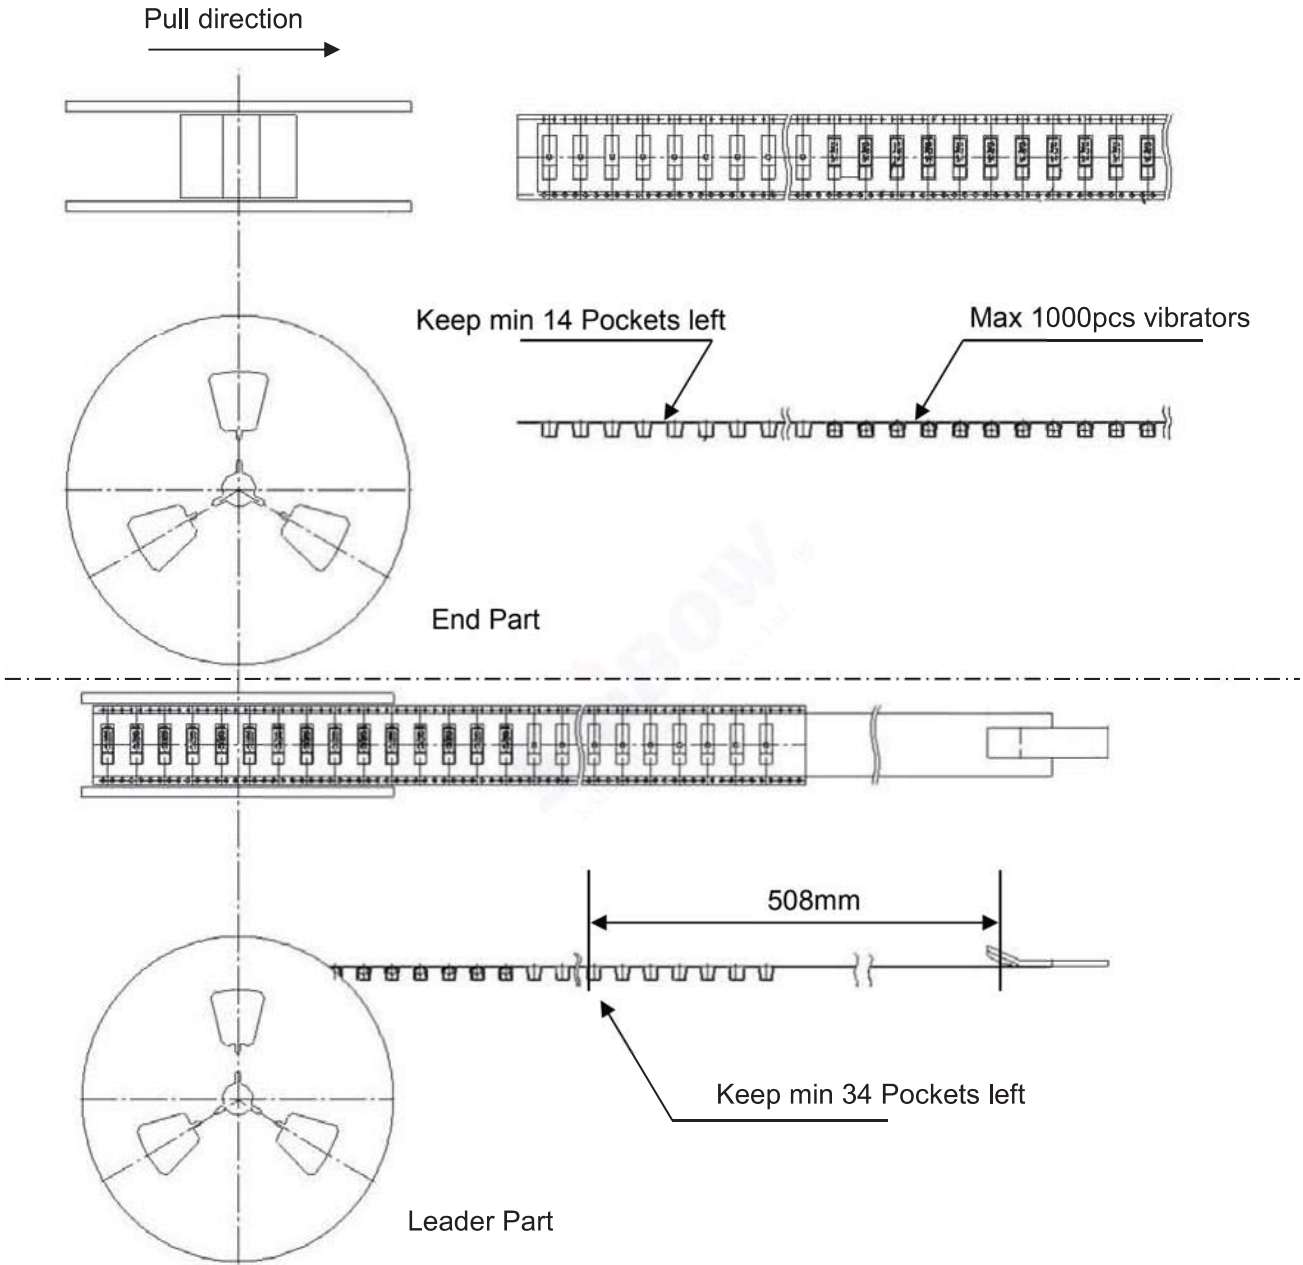


Picture 4 Reel packing condition

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>11 of 15</b>


### 12.3 Final packing condition

1000pcs/reel X 6reel= total 6000pcs

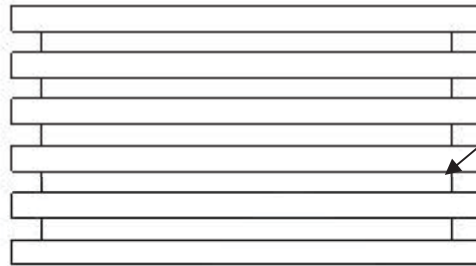

During the vibrator handle or shipping, counterweight must be faced to upper side.

Double wall corrugated cardboard

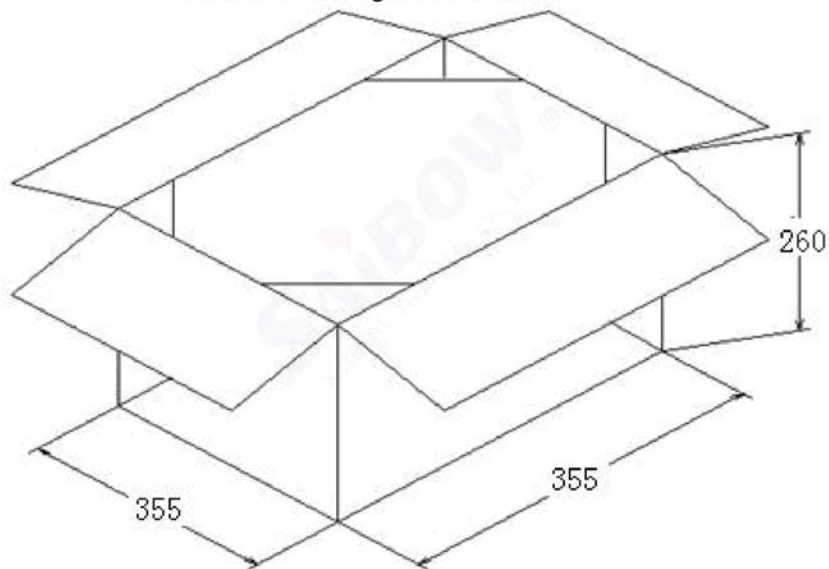

Picture 5 Final packing condition

### 12.4 Accessories included in final package

Out-going inspection data sheet (n=35pcs) will be attached for each lot, we do implemented inspection after reflow. Inspection item including:

- Load speed
- Load current
- Starting current
- Starting voltage
- Coil resistance

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>12 of 15</b>

### 13. RECOMMENDED REFLOW PROFILE FOR VIBRATOR

#### 13.1 Definitions

Reflow Profile = Time vs. temperature plot

Peak temperature = Maximum temperature reached on the component


Convection = Forced air heating

#### 13.2 Recommended temperature check method of reflow furnace

The reflow furnace used should be 100% convection reflow. Thermocouples should be securely attached to the top surface of vibrator to insure the temperature exposure is met. Profile should be recorded by data acquisition for future reference.

#### 13.3 Recommended reflow Profile for Pb-Free soldering

Temperature(°C)

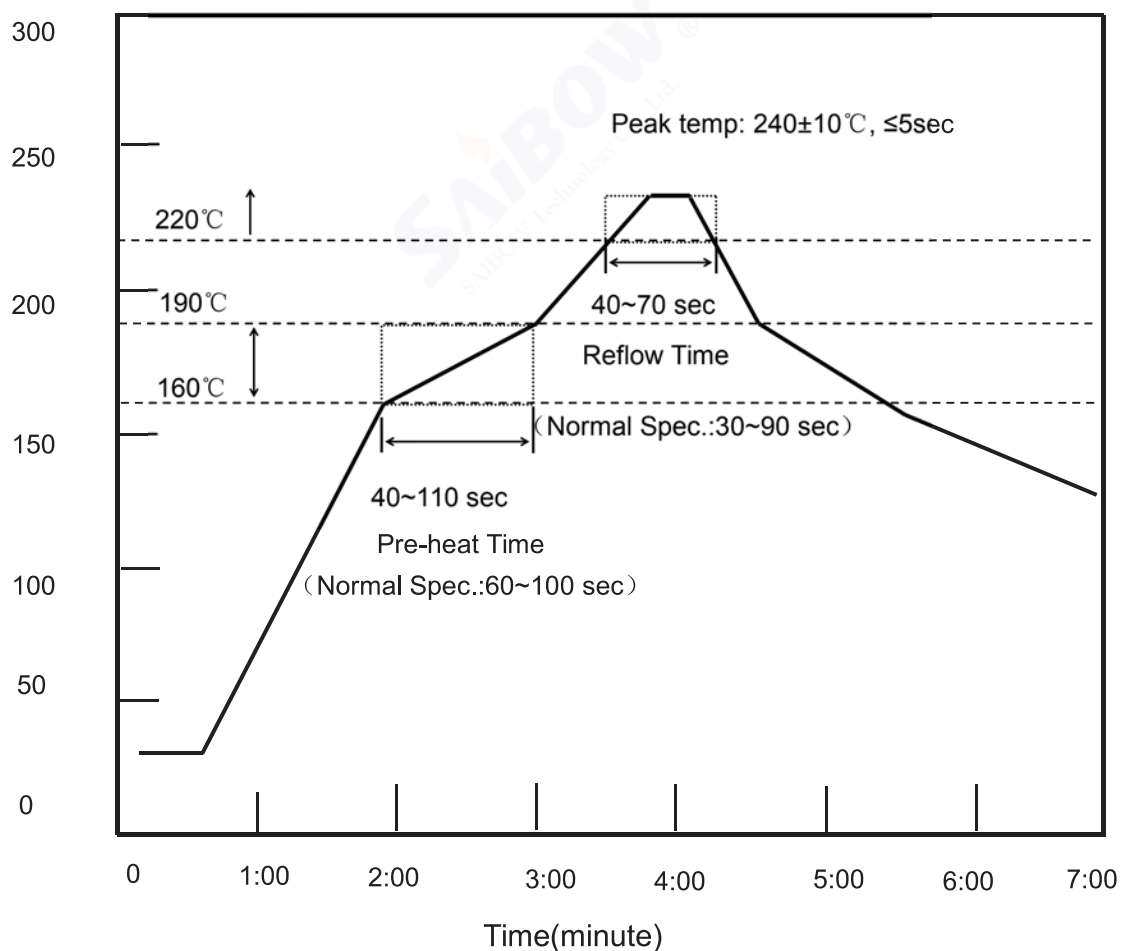

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>		<b>S3Z06B821-731</b>	
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>13 of 15</b>

#### 14. NOTES ON USE

- 14.1 Pay attention to the voltage and current ranges which applied to the vibrator, and use the vibrator in accordance with this specification, otherwise, it will reduce the life and performance of the vibrator.
- 14.2 Do not use hot gun to puff the surface of vibrator from PCB directly.
- 14.3 Do not locking the motor with current applied for long time, which may cause the motor to overheat and short circuit.
- 14.4 Do not exert pressure the terminals, otherwise, it will result in terminal deformation.
- 14.5 Do not bring magnetized objects near or contact with the surface of vibrator, which will demagnetize the magnetism of vibrator and result in noise failure.



---

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.

<b>MATERIAL or METHODS Specification</b>			<b>S3Z06B821-731</b>
TITLE: <b>Motor, Vibrator, 2.7 Volts, 14000 RPM, 11.2x4.40x3.50mm Flat, SMD</b>			
DATE: <b>21.05.06</b>	ISSUE: <b>01</b>	PAGE:	<b>14 of 15</b>

Appendix 1

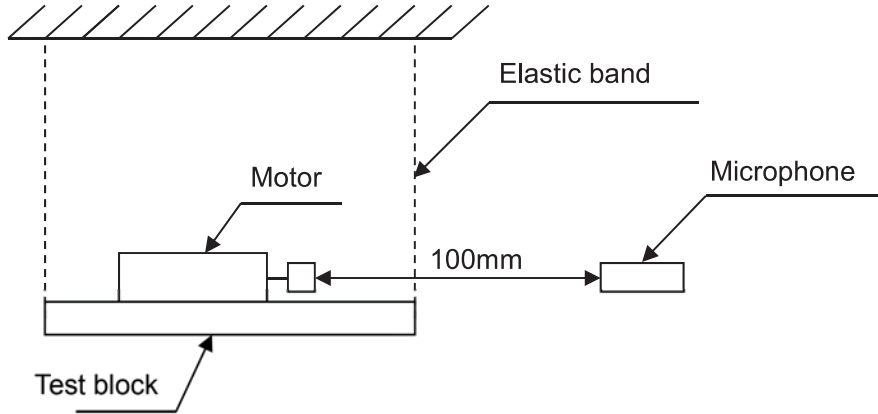


Figure 1.

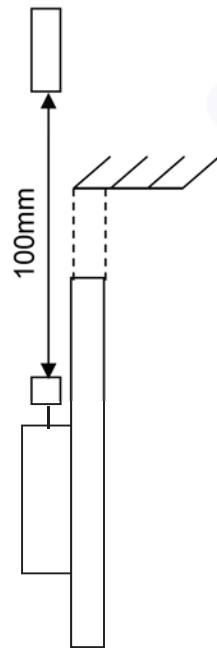


Figure 2.

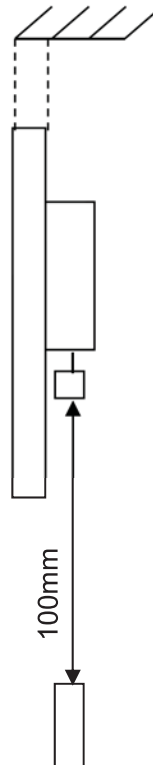


Figure 3.

The information contained in this document is PROPRIETARY to SAIBOW and shall not be reproduced or used in part or whole without Saibow's written consent.



