


Material:

- ② * Insulator: LCP With 35% GF/mineral.
UL 94V-0 Color Black
- * Contact: Phosphor Bronze
- ③ * Pick & Place Pad:
Nylon 6T With 30% GF.
UL 94V-0 Color Nature

Ordering Code:

CB01 ** * M 1 00 - 2 P
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: M = SMT Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:
- ⑦ Pin Size for mate Pin header:
2=0.4 Square Pin
- ⑧ 0=Without Pick & Place Pad
P=With Pick & Place Pad

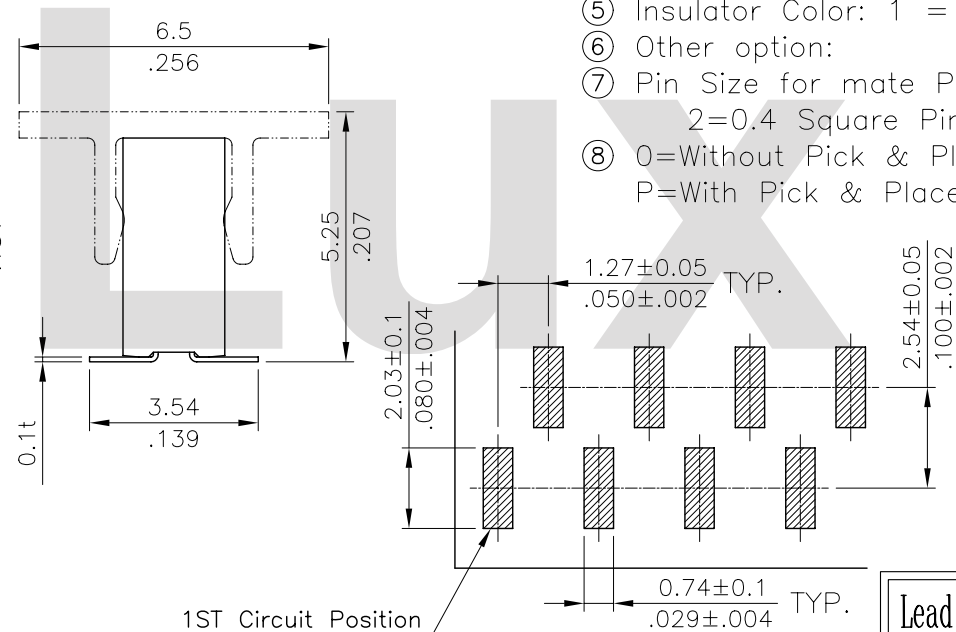


DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.67

* Available in 4 through 50 Circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

④				CIVILUX CORP		DATE	UNIT: mm / inch	TITLE: PITCH 1.27mm(.050") SMT TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
③	Sandy	2/19-09'	ECN09066/ECR08097-0	2009.03.03	DRAWN BY: Sandy	2/25-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	4/30-07'	ECN07156/ECR07018-1	ISSUED	ENGINEER: Eisley	3/02-09'	.X ± 0.25/.010 X' ± 1"		
①	SUN	10/15/04'	ECR04056-1-ECN04394		CHECKED BY: Eisley	3/02-09'	.XX ± 0.15/.006 .X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	3/02-09'	.XXX ± 0.08/.003 .XX' ±	DRAWING NO. CB0102SD	PART NO. CB01***M100-2*
								SCALE 6 / 1	SHEET 1 OF 1