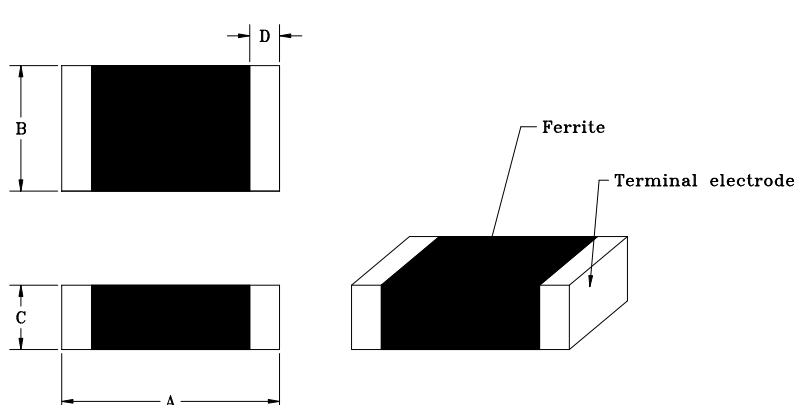


# SPECIFICATION FOR APPROVAL

COMMODITY	<b>CHIP BEAD</b>	SPEC NO.	SP-060925072
ITEM	<b>JCB 201209A-600/3</b> <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：A	表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	2.0	±0.2
	B	1.2	±0.2
	C	0.9	±0.2
	D	0.5	±0.3
	E		
	F		
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
IMPEDANCE	60 ± 25%    Ω
TEST FREQUENCY	100    MHz
RDC	0.04    (max)    Ω
IDC	3000    (max)    mA
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.


REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

# TEST REPORT

COMMODITY :	CHIP BEAD	SPEC NO :	SP-060925072
Type :	JCB 201209A-600/3	版本 : A	表單編號 : TRR-004

Typical Impedance v.s. Frequency Curve

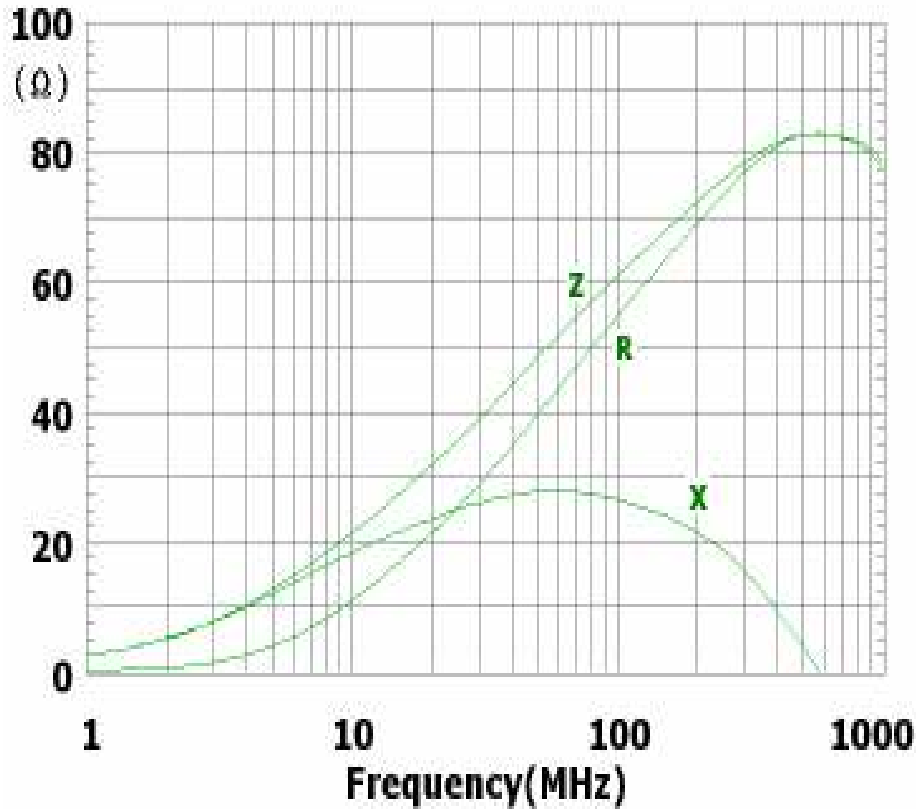

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :



**JANTEK**

**JANTEK ELECTRONICS CO.,LTD**

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : [jantek@jantek-elec.com.tw](mailto:jantek@jantek-elec.com.tw)

Web-Site : [www.jantek-elec.com.tw](http://www.jantek-elec.com.tw)