




- Material:
- * Insulation: High Temperature Plastic, Color Black
 - * Contact: Brass
 - * Fixed Tabs: Brass with Matte Tin Plated

CIRCUITS	DIM. A	DIM. B
2	—	6.7(.264)
4	3.00(.118)	9.7(.382)
6	6.00(.236)	12.7(.500)
8	9.00(.354)	15.7(.618)
10	12.00(.472)	18.7(.736)
12	15.00(.591)	21.7(.854)
14	18.00(.709)	24.7(.972)
16	21.00(.827)	27.7(1.091)
18	24.00(.945)	30.7(1.209)
20	27.00(1.063)	33.7(1.327)
22	30.00(1.181)	36.7(1.445)
24	33.00(1.299)	39.7(1.563)

Ordering Code:

CP35 ** P * H S T - LF
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No.
- ② No. of Circuits: 02~24
- ③ Contact type: P= Plug
- ④ Contact plated:
 - 1= Matte Tin Plated over Nickel
 - A= Selective Gold Flash Plated over 1.27μm(50μ") Nickel
 - B= Selective 0.38 μm(15 μ") Gold Plated over 1.27 μm(50 μ") Nickel
 - C= Selective 0.76 μm(30 μ") Gold Plated over 1.27 μm(50 μ") Nickel
- ⑤ H= Right angle type
- ⑥ Mount type : S= SMT Type
- ⑦ Other options: T= With Fixed Tabs
- ⑧ LF= For Lead Free IR Process

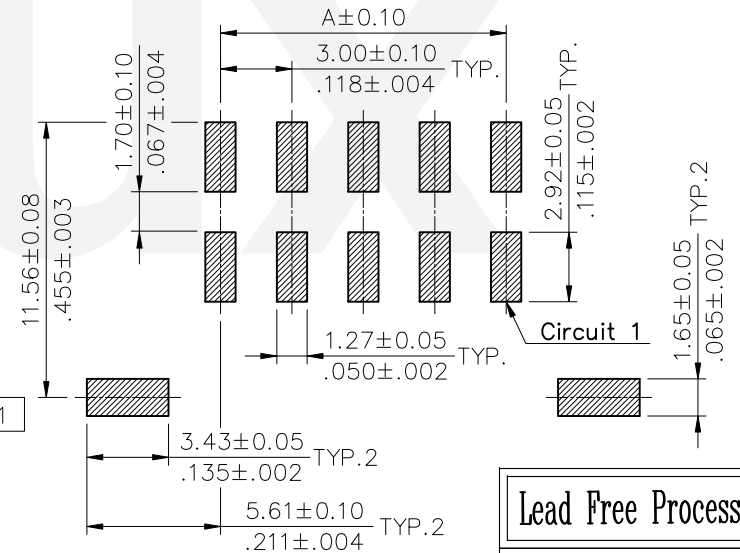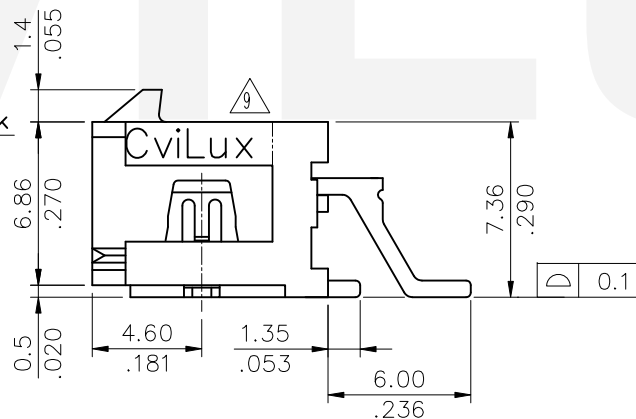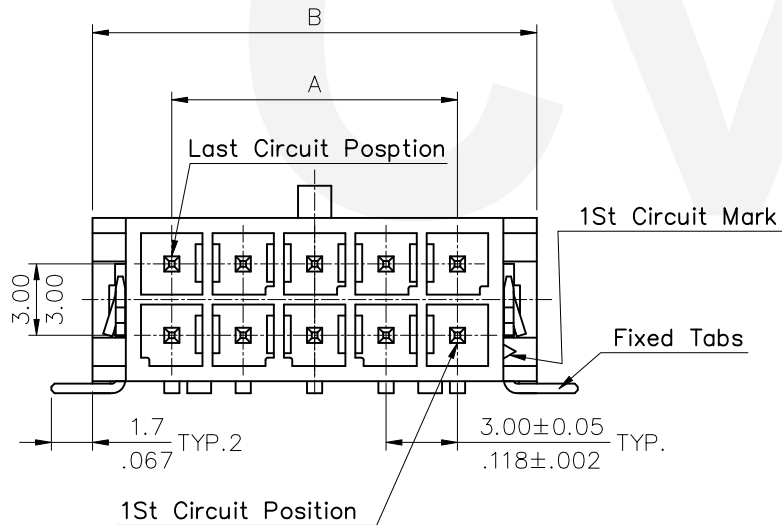

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH RIGHT ANGLE SMT TYPE POWER CONN.	 瀚荃股份有限公司 CviLux Corporation	DRAWING NO.	PART NO.	SCALE	SHEET	OF	
⑨	Eric	3/29-21'	ECRT121017/ECNT121085							CP3542SJ	CP35**P*HST-LF	3 / 1	1	OF
⑧	Michelle	11/12-19'	ECRB11905/ECNT119313	DRAWN BY:	Eric	3/29-21'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
⑦	Sun	3/03-12'	ECR11051-1/ECN11229	ENGINEER:	Sun	3/31-21'	.X ± 0.30/012 X' ± 1'							
⑥	Steven	1/5-11'	ECN11002	CHECKED BY:	Eisley	4/1-21'	.XX ± 0.20/008 .X' ±							
				APPROVED BY:	Eisley	4/1-21'	.XXX ± 0.10/004 .XX' ±							


 2021.04.08
 ISSUED

