

# D

# 4020-K

40x40x20mm(1.57"x1.57"x0.79")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	27 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

# 40 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4020V12SLB-K	12	0.22	2.64	9500	0.47	11.9	11.0	0.31	37
D4020V12HB-K	12	0.16	1.92	8600	0.43	10.9	9.8	0.28	36
D4020V12MB-K	12	0.12	1.44	6500	0.32	8.1	8.4	0.22	27
D4020V12LB-K	12	0.10	1.20	5000	0.19	4.8	6.7	0.21	23
D4020V24HB-K	24	0.13	3.12	8600	0.43	10.9	9.8	0.28	36
D4020V24MB-K	24	0.09	2.16	6500	0.32	8.1	8.4	0.22	27
D4020V24LB-K	24	0.07	1.68	5000	0.19	4.8	6.7	0.21	23

## DIMENSION

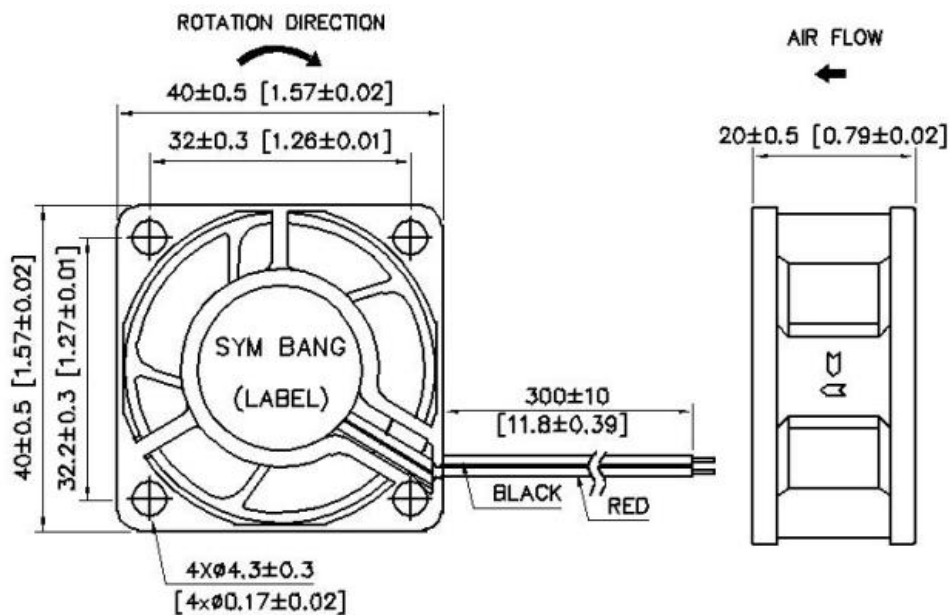

UNIT: mm[inch]

SYMBANG

# AIR PERFORMANCE

