

D

14038D-SU

140x140x38mm(5.51"x5.51"x1.5")



IMPELLER	Plastic Impeller
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	470 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

140



mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D14038V48LD-SU	48	0.40	19.2	5000	1.07	27.2	206.1	5.84	64.80
D14038V48MD-SU	48	0.65	31.2	6000	1.54	39.2	247.3	7.00	68.80
D14038V48HD-SU	48	0.90	43.2	6800	1.98	50.3	280.3	7.94	71.50
D14038V24LD-SU	24	0.75	18.0	5000	1.07	27.2	206.1	5.84	64.80
D14038V24MD-SU	24	1.25	30.0	6000	1.54	39.2	247.3	7.00	68.80
D14038V24HD-SU	24	1.80	43.2	6800	1.98	50.3	280.3	7.94	71.50
D14038V12LD-SU	12	1.50	18.0	5000	1.07	27.2	206.1	5.84	64.80
D14038V12MD-SU	12	2.50	30.0	6000	1.54	39.2	247.3	7.00	68.80
D14038V12HD-SU	12	3.60	43.2	6800	1.98	50.3	280.3	7.94	71.50

DIMENSION

SYMBANG

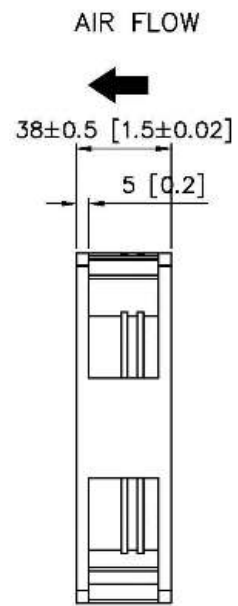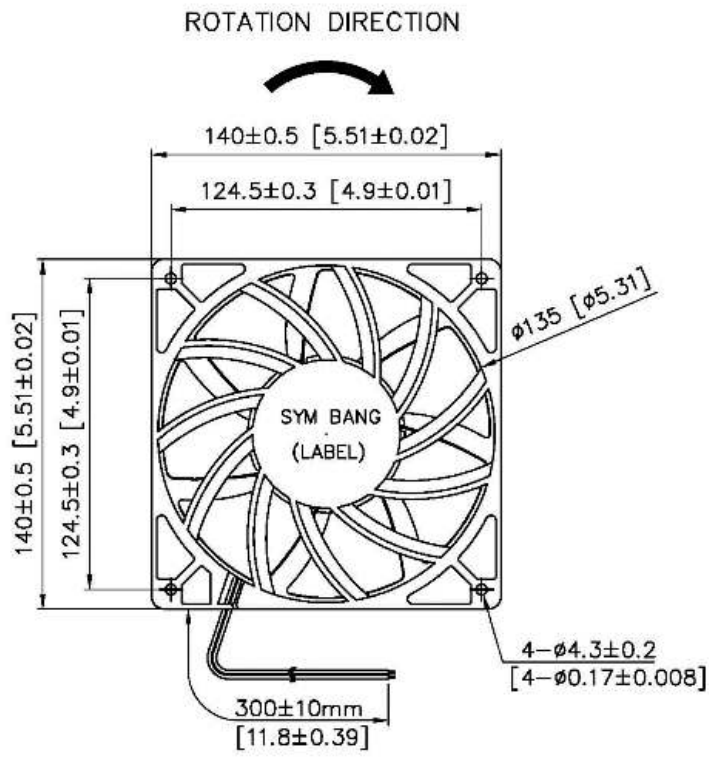

UNIT: mm[inch]

AIR PERFORMANCE

