

D 17689



176x176x89mm(6.92"x6.92"x3.5")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT+ 30% Glass Fiber
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.7 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

176 mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D17689V24SL	24	2.20	52.8	3500	0.91	23	400	11.3	65
D17689V24H	24	1.60	38.4	3100	0.79	20	350	9.9	56
D17689V24M	24	0.88	21.1	2600	0.59	15	300	8.5	47
D17689V24L	24	0.66	15.8	2300	0.43	11	260	7.4	42
D17689V48SL	48	1.10	52.8	3500	0.91	23	400	11.3	65
D17689V48H	48	0.80	38.4	3100	0.79	20	350	9.9	56
D17689V48M	48	0.44	21.1	2600	0.59	15	300	8.5	47
D17689V48L	48	0.33	15.8	2300	0.43	11	260	7.4	42

DIMENSION

ROTATION DIRECTION



AIR FLOW

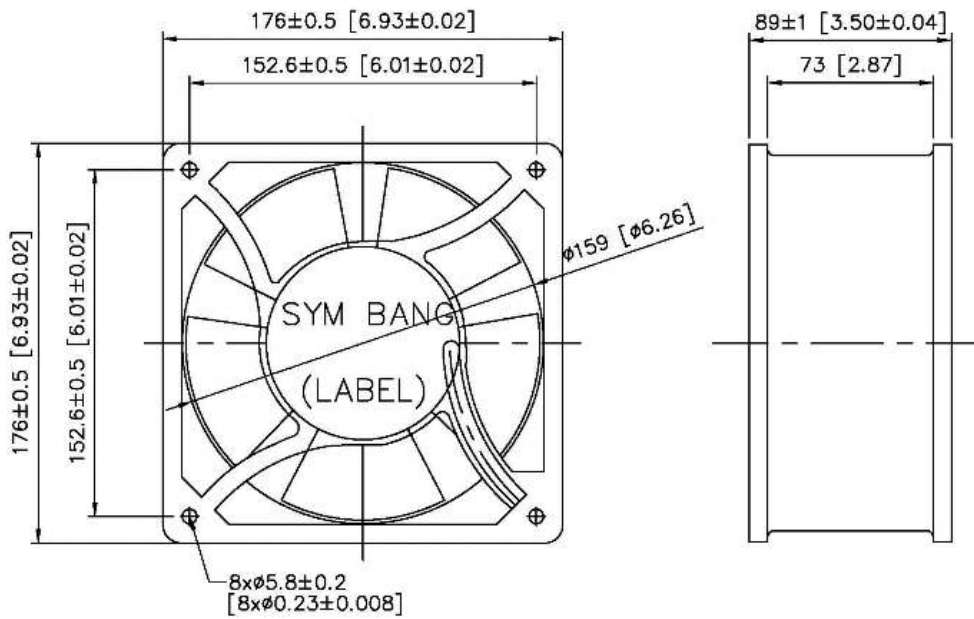

UNIT: mm[inch]

AIR PERFORMANCE

D17689

