

# DB

# 9733-K

97x94x33mm(3.81"x3.70"x1.29")



HOUSING Thermoplastic PBT, UL94V-0  
IMPELLER Thermoplastic PBT, UL94V-0  
BEARING Ball  
OPERATING TEMPERATURE -10°C to + 60°C  
DIELECTRIC STRENGTH 5mA Max. at 500 VAC for 1 minute  
INSULATION RESISTANCE 10M  $\Omega$  min. @500 VDC  
WEIGHT 150 g  
ROHS COMPLIANCE Yes  
IP LEVEL IP21 (Special IP Rating On Request)

# 97 mm


## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB9733V12H-K	12	0.6	7.2	3600	1.14	28.96	28.8	0.82	52
DB9733V12M-K	12	0.32	3.84	2700	0.40	10.16	20.1	0.57	45
DB9733V12L-K	12	0.21	2.52	2200	0.20	5.08	16.3	0.46	43
DB9733V24H-K	24	0.32	7.68	3600	1.14	28.96	28.8	0.82	52
DB9733V24M-K	24	0.18	4.32	2700	0.40	10.16	20.1	0.57	45
DB9733V24L-K	24	0.14	3.36	2200	0.20	5.08	16.3	0.46	43


## DIMENSION

SYMBANG

ROTATION DIRECTION

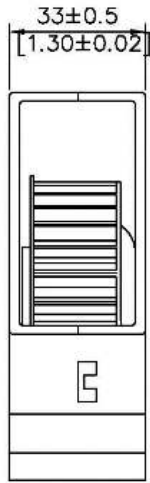

UNIT: mm[inch]

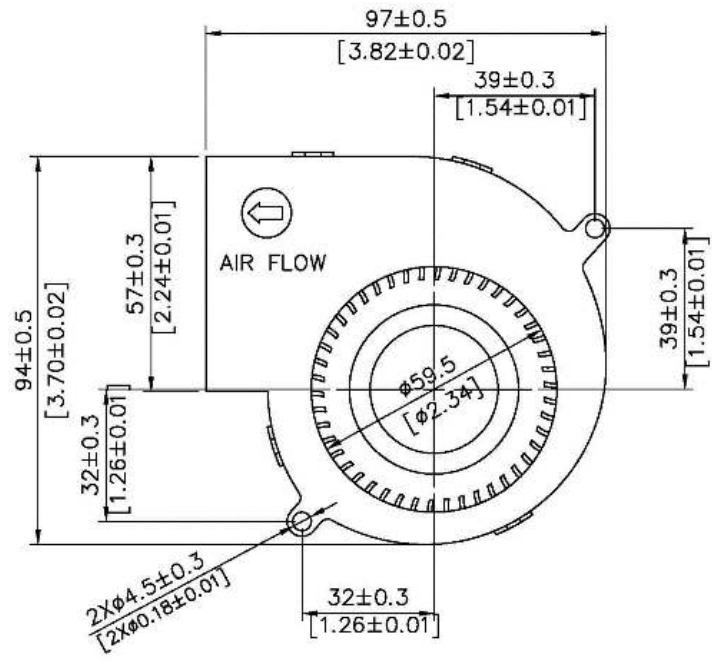

# AIR PERFORMANCE

