

# DB

# 12131-C

121x121x31mm(4.75"x4.75"x1.22") **CE**




HOUSING	Thermoplastic PBT, UL94-0
IMPELLER	Thermoplastic PBT, UL94-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
WEIGHT	260 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

# 121 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB12131V12H-C	12	0.60	10.8	3500	0.91	23	30	0.85	46
DB12131V24H-C	24	0.55	13.2	3500	0.91	23	30	0.85	46

## DIMENSION

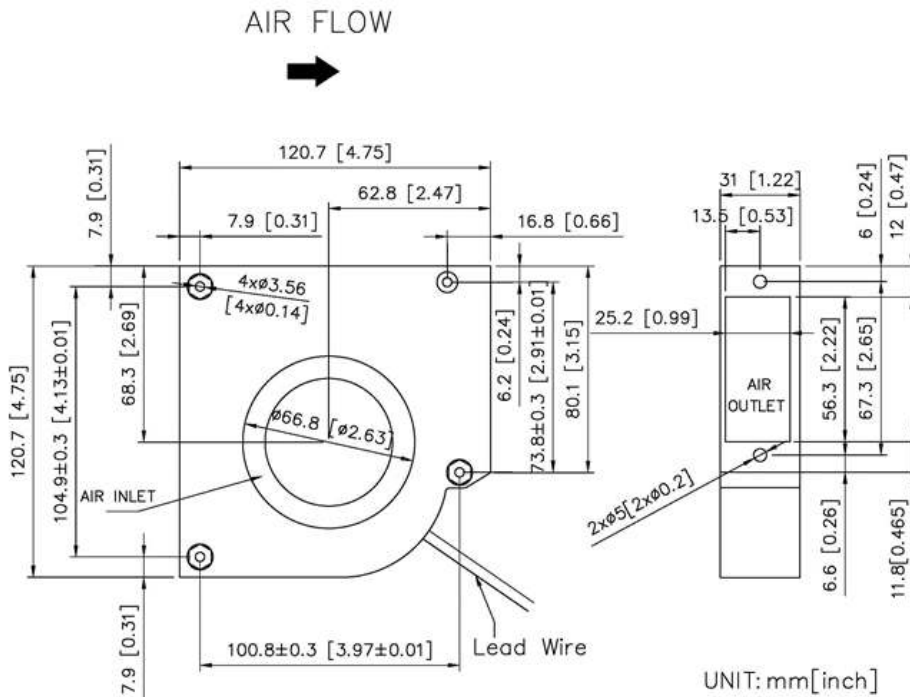

# AIR PERFORMANCE

