

# A

# 8025DV-S

80x80x25mm(3.15"x3.15"x1")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	Ball -20°C to + 70°C Sleeve -10°C to + 55°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Lead Wire
WEIGHT	260 g
ROHS COMPLIANCE	Yes
OPTIONAL FUNCTION	FG, RD
DUAL VOLTAGE	115/230 VAC
IP LEVEL	IP21 (Special IP Rating On Request)

# 80mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A8025DVHBL-S	115	0.17/0.15	15/13	2550/3200	0.14/0.22	3.5/5.5	15/19	0.42/0.54	27/34
A8025DVHBL-S	230	0.08/0.07	15/13	2550/3200	0.14/0.22	3.5/5.5	15/19	0.42/0.54	27/35

## DIMENSION

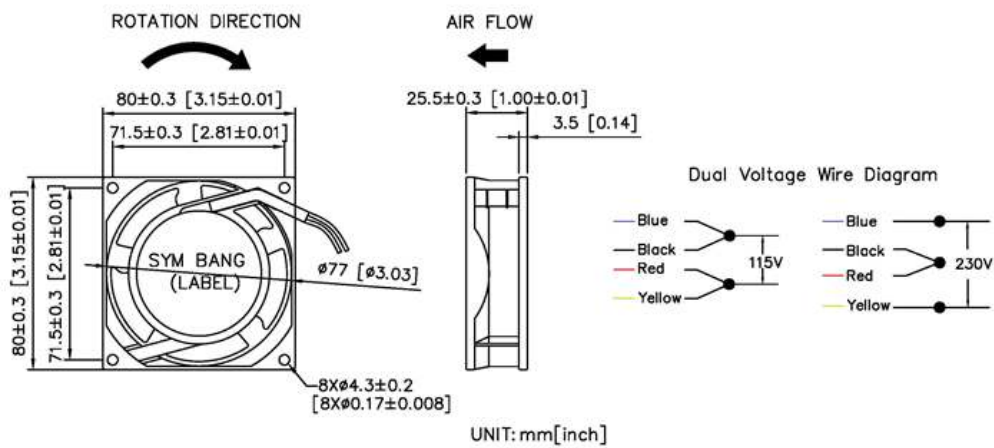

SYMBANG

# AIR PERFORMANCE

