


通用继电器	HJQ-15FT
-------	----------

- High power&low cost
- 40A switching capability
- Less than 1W coil power
- Open sealed type available
- Class B/F available
- Conform to RoHS,ELV directive



■ ORDERING CODE 订购代码

<u>HJQ-15FT</u>	<u>—</u>	<u>S</u>	<u>—</u>	<u>Z</u>	<u>(TBF-1)</u>	<u>N</u>	<u>/</u>	<u>12VDC</u>	<u>xx</u>
1		2		3	4	5		6	7
1. Relay Model 继电器型号						4. Insulated Level 绝缘等级			7. 特殊代码
2. S: Sealed 密封 SV: Vent hoie						TBF-1: Class F级 Nil: 标准			Nil: 标准 IT: GWIT灼热丝750°C(at ≤2 s)
3. 触点转换形式 H: Form A Z: Form C D: Form B						5. N: 无3号引脚,触点与线圈间耐压1500VAC Nil: 有3号引脚,触点与线圈间耐压1500VAC WT: 有3号引脚,触点与线圈间耐压2500VAC NT: 无3号引脚,触点与线圈间耐压2500VAC			
						6. Coil Nominal Voltage 线圈额定电压 5,6,9,12,18,24,48,110VDC			

■ COIL DATA 线圈参数 (at 20°C)

Nominal Voltage 额定电压(VDC)	5	6	9	12	18	24	48	110	0.93W
Coil Resistance 线圈阻值(Ω ±10%)	27	39	87	155	350	620	2480	13010	
Rated Current 额定电流(mA)	186	155	103	77.5	52	39	19	9	
Max Operate Voltage 最大吸合电压(VDC)	3.75	4.5	6.75	9	13.5	18	36	82.5	
Min Release Voltage 最小释放电压(VDC)	0.5	0.6	0.9	1.2	1.8	2.4	4.8	11	
Max Applicable Voltage 最大过载电压	70°C时额定电压的130%，23°C时额定电压的170%								

■ CONTACT DATA 触点参数

Contact Form 触点形式	1H/1D/1Z
Contact Material 触点材料	Silver Alloy
Load 负载	Resistive load(COS Φ=1)
Contact Ratings 触点负载	NC:30A240VAC, NO:40A240VAC
Minimum load 最小负载	500mA 5VDC
Max Switching Voltage 最大转换电压	250VAC/30VDC
Max Switching Current 最大转换电流	30A
Max Switching Power 最大转换功率	7200VA/560W
Contact Resistance 接触电阻	100mΩ Max at 6VDC 1A
Life Expectancy 寿命	Electrical 电气寿命: 50,000 Operations(at6 Operations/minute) –NO常开触点
	Mechanical 机械寿命: 10,000,000 Operations(at300Operations/minute)





■ CHARACTERISTICS DATA 性能参数

Insulation Resistance绝缘阻值	100MΩ Min at 500VDC
Dielectric Strength Between Open Contacts触点间耐压	1500VAC(for one minute)
Between Contacts and coil触点与线圈间耐压	1500VAC/2500VAC(for one minute)
Operate Time吸合时间	15ms
Release Time释放时间	10ms
Temperature Range环境温度	-40°C to +70°C (Class F: 85°C)
Shock Resistance冲击	Operating Extremes动作极限: 10G
	Damage Limits破坏极限: 100G
Vibration Resistance振动	10-55Hz, 1.5mm
Max. switching frequency最大转换频率	Mechanical: 18,000 operations/hr
	Electrical: 360 operations/hr
Humidity湿度	40-85%
Weight重量	Approx 36g
Safety Standard安全标准	UL cUL


■ APPROVED STANDARDS 安全标准

Model(型号)	Coiling rating (线圈电压)	Safety Standard (安全标准)	Contact rating (触点负载)
HJQ-15FT	5 to 48VDC	UL/cUL	NO: 40A 240VAC NC: 30A 240VAC

■ ENGINEERING DATA 设计参数

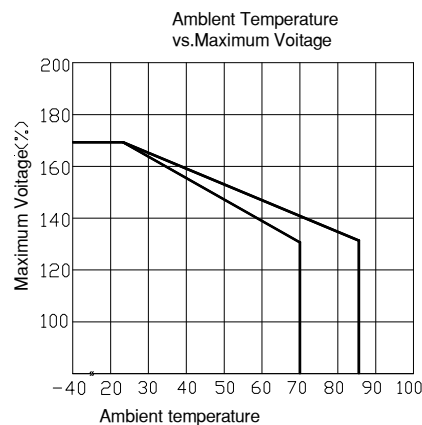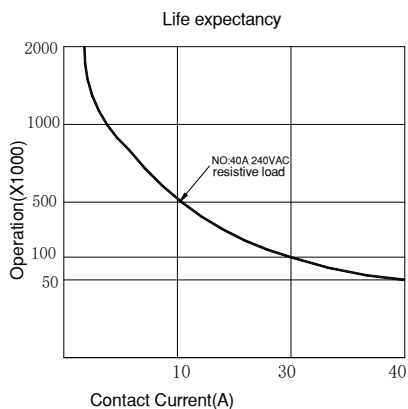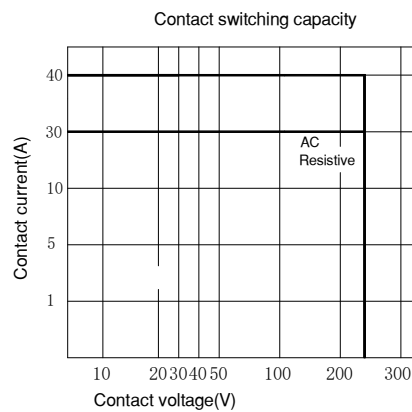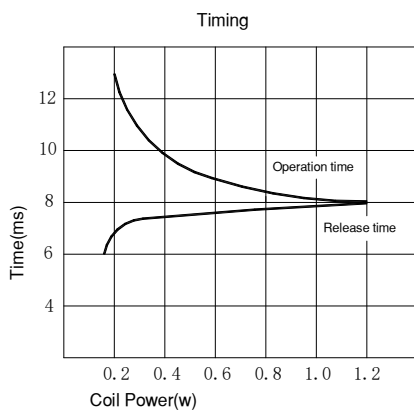

OVERALL AND MOUNTING DIMENSIONS 安装图

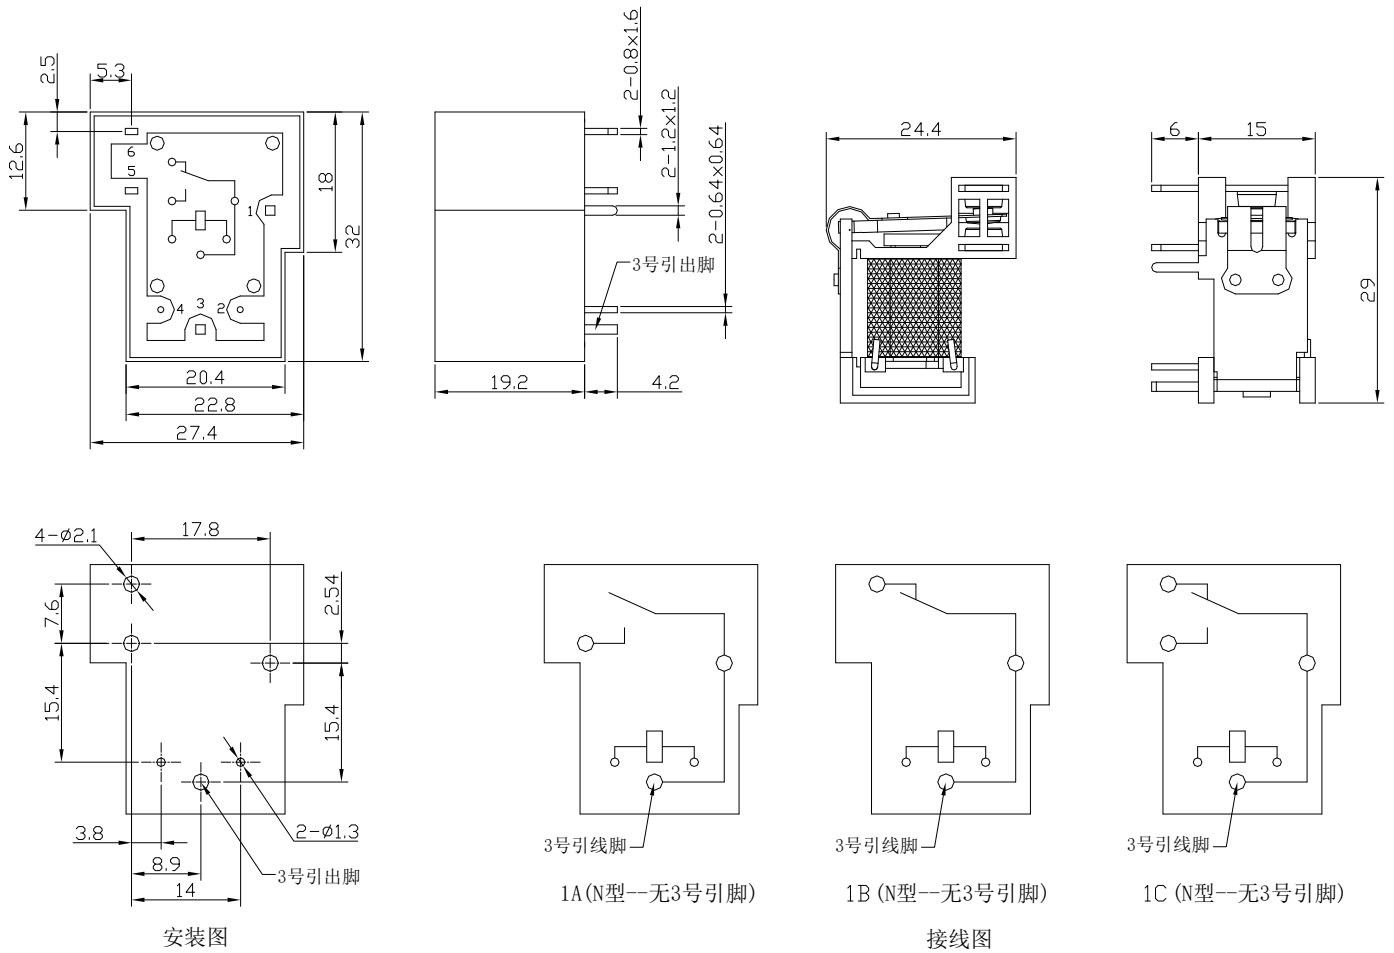

安装图

接线图

备注：1) 产品部分外形尺寸中未注尺寸公差：当外形尺寸 $\leq 1\text{mm}$ 时，公差为 $\pm 0.2\text{mm}$ ；当外形尺寸在 $1\sim 5\text{mm}$ 时，公差为 $\pm 0.3\text{mm}$ ；当外形尺寸 $> 5\text{mm}$ 时，公差为 $\pm 0.4\text{mm}$ 。

2) 安装孔尺寸中未注尺寸公差均为 $\pm 0.1\text{mm}$ 。

声明：

本产品规格书仅供客户使用时参考，如有更改，恕不另行通知。