

A

15055DVM-DA

150x172x55mm(5.9"x6.77"x2.17")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Lead Wire
WEIGHT	840 g
ROHS COMPLIANCE	Yes
DUAL VOLTAGE	115/230 VAC
IP LEVEL	IP54 (Special IP Rating On Request)

150mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A15055DVHBLM-DA	115	0.23/0.25	27/28	2750/3150	0.49/0.53	12.5/13.5	210/240	5.9/6.7	57/61

DIMENSION

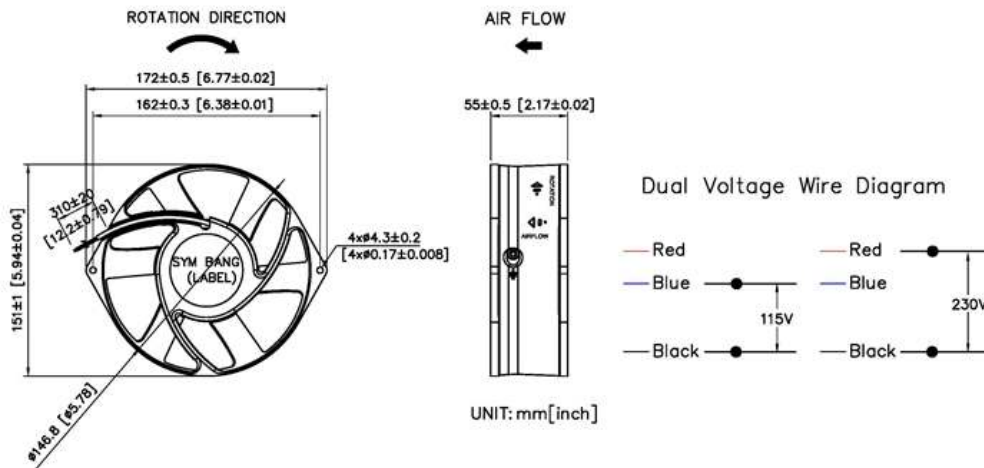

SYMBANG

AIR PERFORMANCE

