

A

17238DVM

172x151x38mm(6.8"x5.9"x1.5") **CE**



| | |
|-------------------------|---|
| HOUSING | Aluminum Die Casting, Painted Black |
| IMPELLER | Metal |
| BEARING | Ball |
| OPERATING TEMPERATURE | -10°C to + 70°C |
| INSULATION | Class A |
| OPERATING VOLTAGE RANGE | 85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type |
| DIELECTRIC STRENGTH | 5mA Max. at 1500 VAC for 1 second |
| INSULATION RESISTANCE | 10M Ω min. @500 VDC |
| MOTOR TYPE | Outer Rotor, AC Induction Capacitor Motor |
| SAFETY | Thermally Protected |
| TERMINATION | Lead Wire |
| WEIGHT | 820 g |
| ROHS COMPLIANCE | Yes |
| DUAL VOLTAGE | 115/230 VAC |
| IP LEVEL | IP21(Special IP Rating On Request) |


172

mm

SPECIFICATION

| MODEL NO. | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE | | MAX. AIR FLOW | | NOISE dB(A) @1M |
|--------------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|-----------|-----------------|
| | | | | | inchH2O | mmH2O | CFM | m3/min | |
| A17238DVHBLM | 115 | 0.23/0.23 | 27/27 | 2650/3000 | 0.39/0.31 | 10/8 | 215/255 | 6.08/7.21 | 52/58 |

DIMENSION

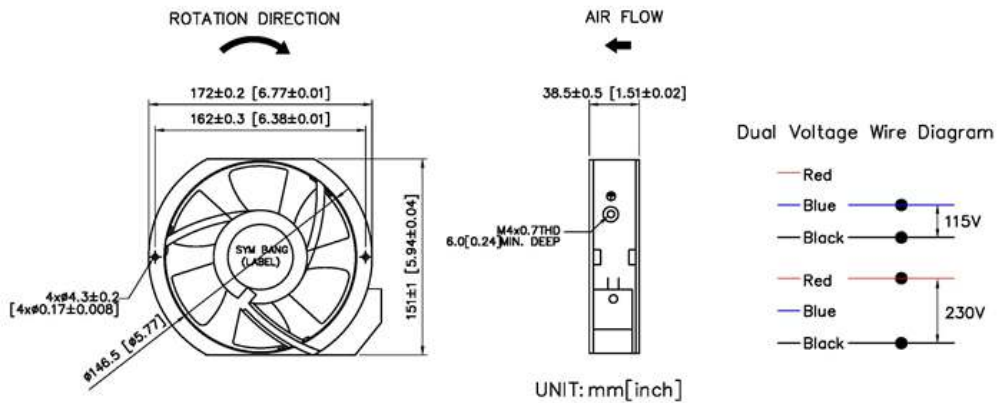

AIR PERFORMANCE

