

A

17251DV-S

172x151x51mm(6.8"x5.9"x2")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1050 g
ROHS COMPLIANCE	Yes
OPTIONAL FUNCTION	FG, RD
DUAL VOLTAGE	115/230 VAC
IP LEVEL	IP21(Special IP Rating On Request)


172

 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251DVHBL-S	115	0.30/0.25	26.7/29.7	2800/3200	0.71/0.75	18/19	210/240	5.94/6.79	57/61
-	230	0.11/0.13	26.7/29.7	2800/3200	0.71/0.75	18/19	210/240	5.94/6.79	57/61

DIMENSION

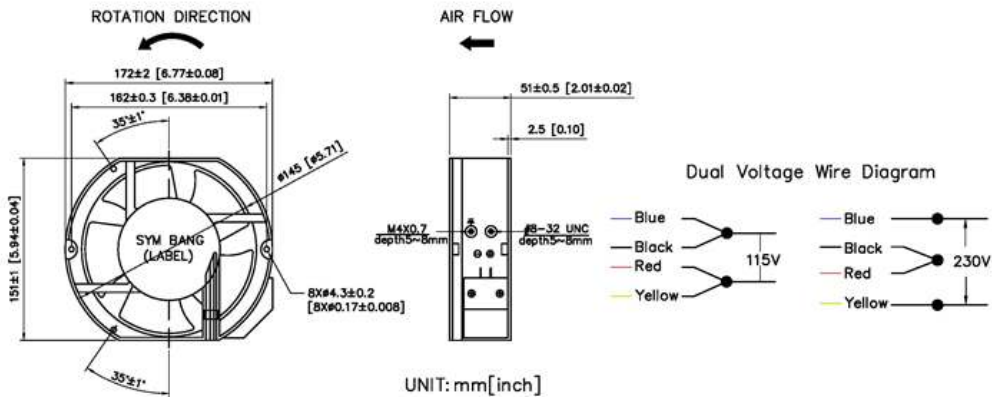

SYMBANG

AIR PERFORMANCE

