

# A

# 22580-S

225x225x80mm(8.86"x8.86"x3.15")




|                         |  |
|-------------------------|--|
| HOUSING                 | Aluminum Die Casting, Painted Black                                  |
| IMPELLER                | Thermoplastic PBT, UL94V-0   |
| BEARING                 | Ball   |
| OPERATING TEMPERATURE   | Ball -10°C to + 70°C   |
| INSULATION              | Class A  |
| OPERATING VOLTAGE RANGE | 100 VAC to 120 VAC for 115V Type<br>200 VAC to 240 VAC for 230V Type |
| DIELECTRIC STRENGTH     | 5mA Max. at 1500 VAC for 1 second                                    |
| INSULATION RESISTANCE   | 10M Ω min. @500 VDC  |
| MOTOR TYPE              | AC Induction Capacitor Motor   |
| SAFETY                  | Thermally Protected  |
| TERMINATION             | Terminals or Lead Wire   |
| WEIGHT                  | 2.5 kg   |
| ROHS COMPLIANCE         | Yes  |
| IP LEVEL                | IP21 (Special IP Rating On Request)                                  |

# 225 mm

## SPECIFICATION

| MODEL NO.   | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |             | NOISE dB(A) @1M |
|-------------|------------------|------------------|----------------|-------------|-------------------|-------|---------------|-------------|-----------------|
|             |                  |                  |                |             | inchH2O           | mmH2O | CFM           | m3/min      |                 |
| A22580V2H-S | 230              | 0.44/0.44        | 87/105         | 2920/3450   | 1.18/1.57         | 30/40 | 570/660       | 16.11/18.65 | 78              |

## DIMENSION

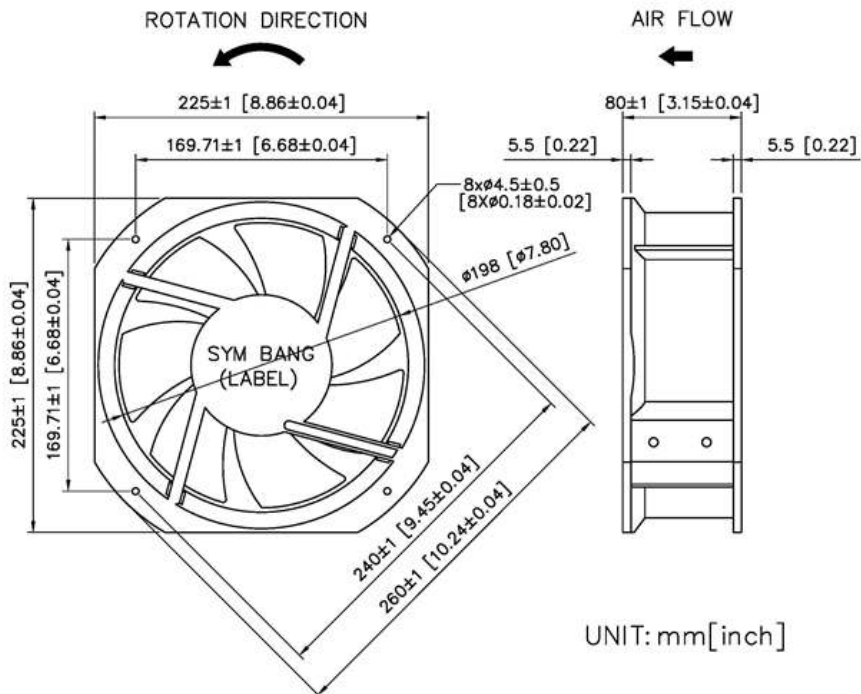

SYMBANG

# AIR PERFORMANCE

