

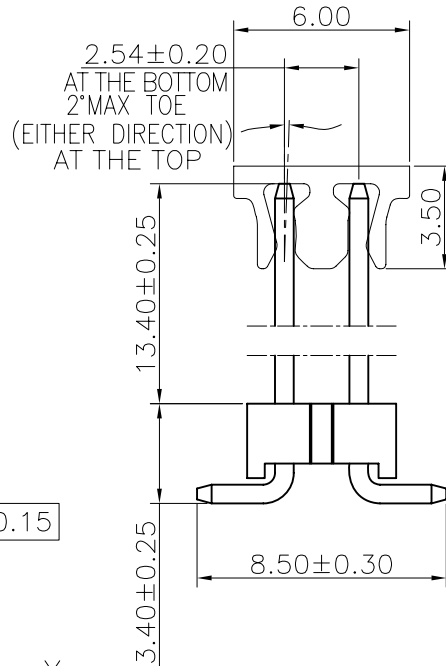
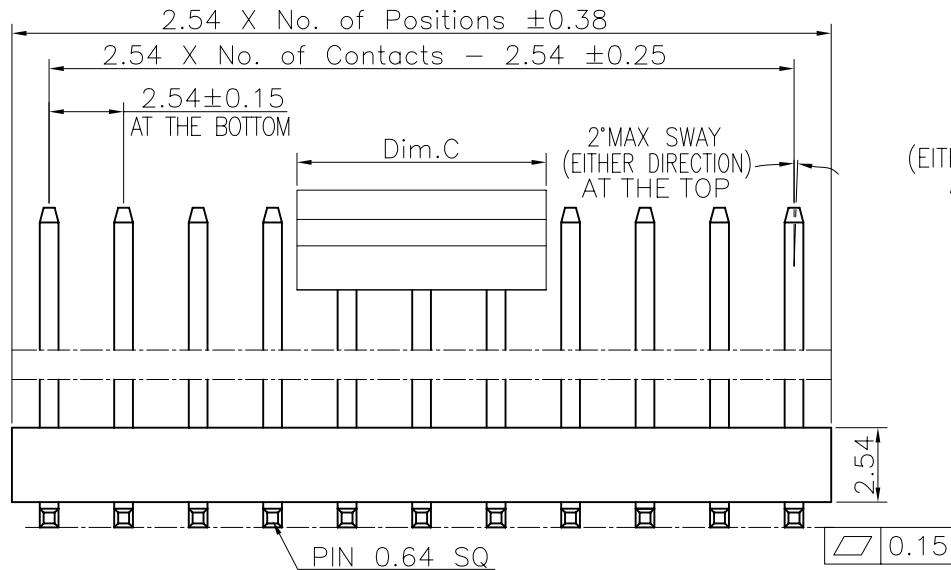


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2019.11.21	何東華

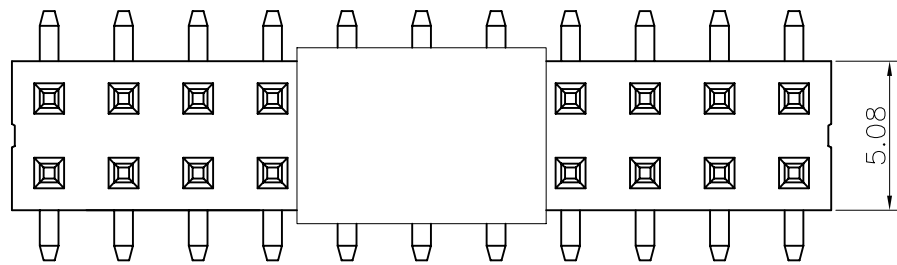

Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board Layout
 (Tolerance:±0.05)

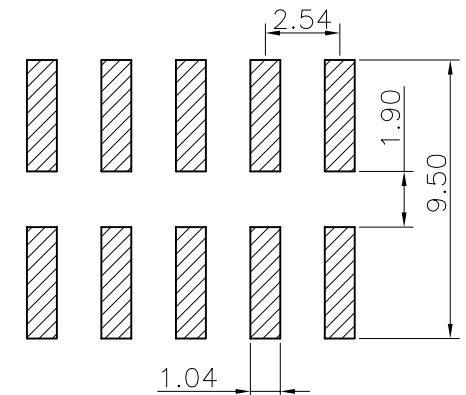

Dim.C	NOTE
5.00	02Pins
6.00	03~08Pins
8.50	09~40Pins

Ordering Information

G PHC201 - XX XX A 285 C 1 Z X

No. Of Pins Per Row 02~40
 Standard Plating 02=Gold Flash
 Selective Plating 01=Tin 05=Gold Flash/Tin
 Color 1=Black
 Standard Packing C=Tube(03~40PIN)
 Selective Packing E=Cap+Tube(03~40PIN)
 F=Cap+Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED: 何東華	DATE: 2019.11.21
CHECKED:	DATE:
CO SIGNED: 鐘隆進	DATE: 2019.11.21
APPROVED:	DATE:

DWG. NO.	GPHC201-CA285CZ
PART NO.	GPHC201-XXXX A285C1ZX

TITLE.	2.54 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR
--------	--

REV.	UNIT.	SCALE.	PAGE.
01	mm	4:1	1/1