

# DFG 60-3P



Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

# 60 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFG60360V24HB-3P	24	0.66	15.84	1750	0.209	5.3	197.88	5.6	46
DFG60300V24HB-3P	24	0.59	14.16	1850	0.217	5.5	166.08	4.7	47
DFG60240V24HB-3P	24	0.51	12.24	2000	0.24	6.1	137.81	3.9	49
DFG60180V24HB-3P	24	0.28	6.72	1600	0.181	4.6	77.74	2.2	44
DFG60120V24HB-3P	24	0.24	5.76	2000	0.252	6.4	63.60	1.8	49

## DIMENSION

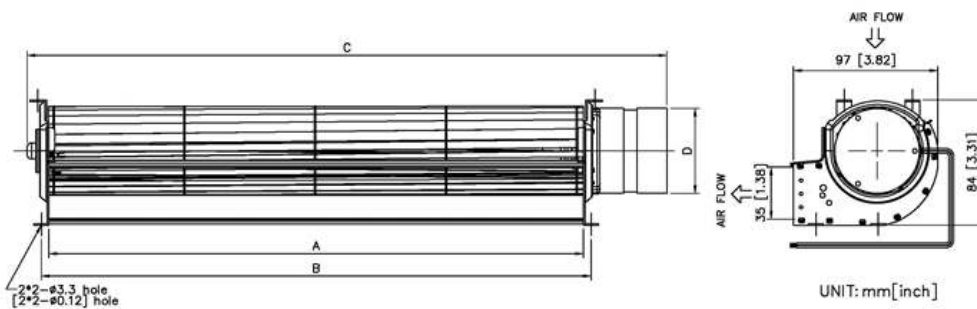

MODEL NO.	DIMENSION(mm)				WEIGHT (g)
	A	B	C	D	
DFG60120-3P	120	130	170	38	400
DFG60180-3P	180	190	230	38	570
DFG60240-3P	240	250	310	56	790
DFG60300-3P	300	310	370	56	860
DFG60360-3P	360	370	430	56	950

## AIR PERFORMANCE

