

DFG 65-3P



Ø65mm(Ø2.56")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø65mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

65 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFG65420V24HB-3P	24	0.32	7.68	1150	0.091	2.3	180.21	5.1	37
DFG65360V24HB-3P	24	0.29	6.96	1200	0.094	2.4	155.48	4.4	38
DFG65300V24HB-3P	24	0.27	6.48	1250	0.102	2.6	134.28	3.8	36
DFG65240V24HB-3P	24	0.23	5.52	1300	0.106	2.7	102.47	2.9	35
DFG65180V24HB-3P	24	0.20	4.80	1400	0.110	2.8	77.74	2.2	34

DIMENSION

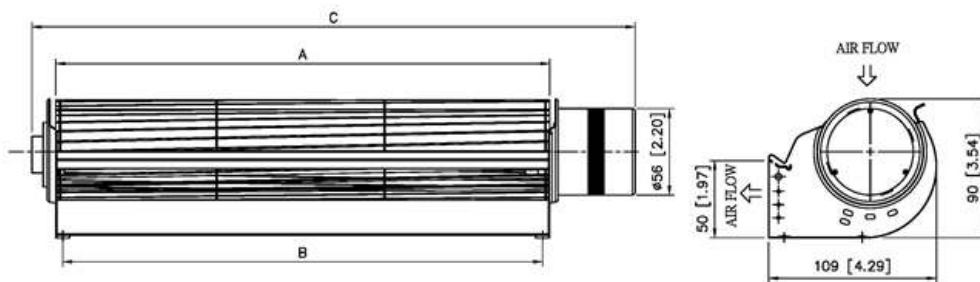

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
DFG65180-3P	180	172	250	740
DFG65240-3P	240	232	310	810
DFG65300-3P	300	292	370	930
DFG65360-3P	360	352	430	1050
DFG65420-3P	420	412	490	1110

UNIT: mm [inch]

AIR PERFORMANCE

