

# ACTIVA INC.

## SPECIFICATION SHEET



MODEL NO. :	A17251V2HBL-S
DESCRIPTION :	AC COOLING FAN
VERSION :	A
RELEASED DATE :	2015.04.28

APPROVED BY	PREPARED BY
<i>Clouder Hsia</i>	<i>Fengming Lin</i>
2015.04.28	2015.04.28

**SYMBANG**



Intertek



UKAS  
MANAGEMENT  
SYSTEMS

014

### ACTIVA INC.

9F-1,472, Chung San 2<sup>nd</sup> Road, Kaohsiung 800, Taiwan, R.O.C.  
Tel: 886-7-2824356 Fax: 886-7-2414287 E-Mail: info@symbang.com.tw  
Web Site: <http://www.activa.com.tw> <http://www.symbang.com.tw>

# ACTIVA INC.

## PRODUCT SPECIFICATION

### A. General Specification

Item		Specification		Condition
1	Model No.	A17251V2HBL-S		
2	Outline Dimension	172 x 151 x 51 mm		
3	Rated Voltage	AC	230 V	
4	Operating Voltage Range	AC	185-245 V	
5	Start Voltage	AC	185 V	
6	Frequency	50/60	HZ	
7	Rated Current	0.11/0.13	A	At Rated Voltage, 25°C, 65% RH, Free Air
8	Power Consumption	26.7/31.2	W	
9	Rotating Speed	2800/3200	RPM $\pm 10\%$	At Rated Voltage, 25°C, 65% RH, Free Air
10	Max. Airflow	210/240	CFM	At Rated Voltage AMCA 210 Standard
		5.94/6.79	m <sup>3</sup> /min	
11	Max. Static Pressure	18/19	mmH <sub>2</sub> O	At Rated Current
		0.71/0.75	inchH <sub>2</sub> O	
12	Noise Level	56/60	dB(A)	At Rated Voltage Measured in a non-echo Chamber CNS 8753 Standard ISO 3744 Test Condition
13	Life	50,000hrs	at 25°C	MTTF (Mean Time To Failures) at Confidence. Level 90%
14	No. of Blade	5	Blades	
15	No. of Pole	2	Poles	
16	Rotating Direction	CounterClockwise View From Label Side		
17	Weight	1.05	kg	
18	Motor Type	AC Induction Capacitor Motor		
19	Safety Protection	Impedance Protected		
20	Signal Output	N/A		

# ACTIVA INC.

## B. Main Materials / Parts Specification

Materials / Parts		Specification
1	Housing	Aluminum Die Casting, Painted Black
2	Blade	Thermoplastic PBT, UL94V-0
3	Bearing	Ball Bearings
4	Termination	Lead Wire
5	Connector	N/A

## C. Safety Approvals

Safety Approvals	UL	TUV	
File Number	E193733	50184428	

## D. Environmental Specification


Item		Specification / Condition
1	Operating Temp. Range	Temperature : -10°C ~ + 70°C
2	Storage Temperature	All function shall be normal after 500 hours storage at -20°C to +70°C with a 24 hours recovery period at room temperature.
3	Humidity Test	After 96 hours, 95% RH, 40+/-2°C per MIL-STD-202F, method 103B humidity test, the measured data on insulation resistance and dielectric strength shall meet the specification.
4	Thermal Shock	Per MIL-STD 202F Method 107D, Condition D
5	Insulation Shock	Class A

## E. Electrical Specification


Item		Specification/Condition
1	Insulation Resistance	Minimum 10MΩ Between frame and AC lead wire / terminal at 500VDC for 60 seconds
2	Dielectric Strength	Maximum leakage 5mA between frame and AC lead wire / terminal at 1.5KVAC for 1 seconds.

# ACTIVA INC.

## F. Outline Dimension

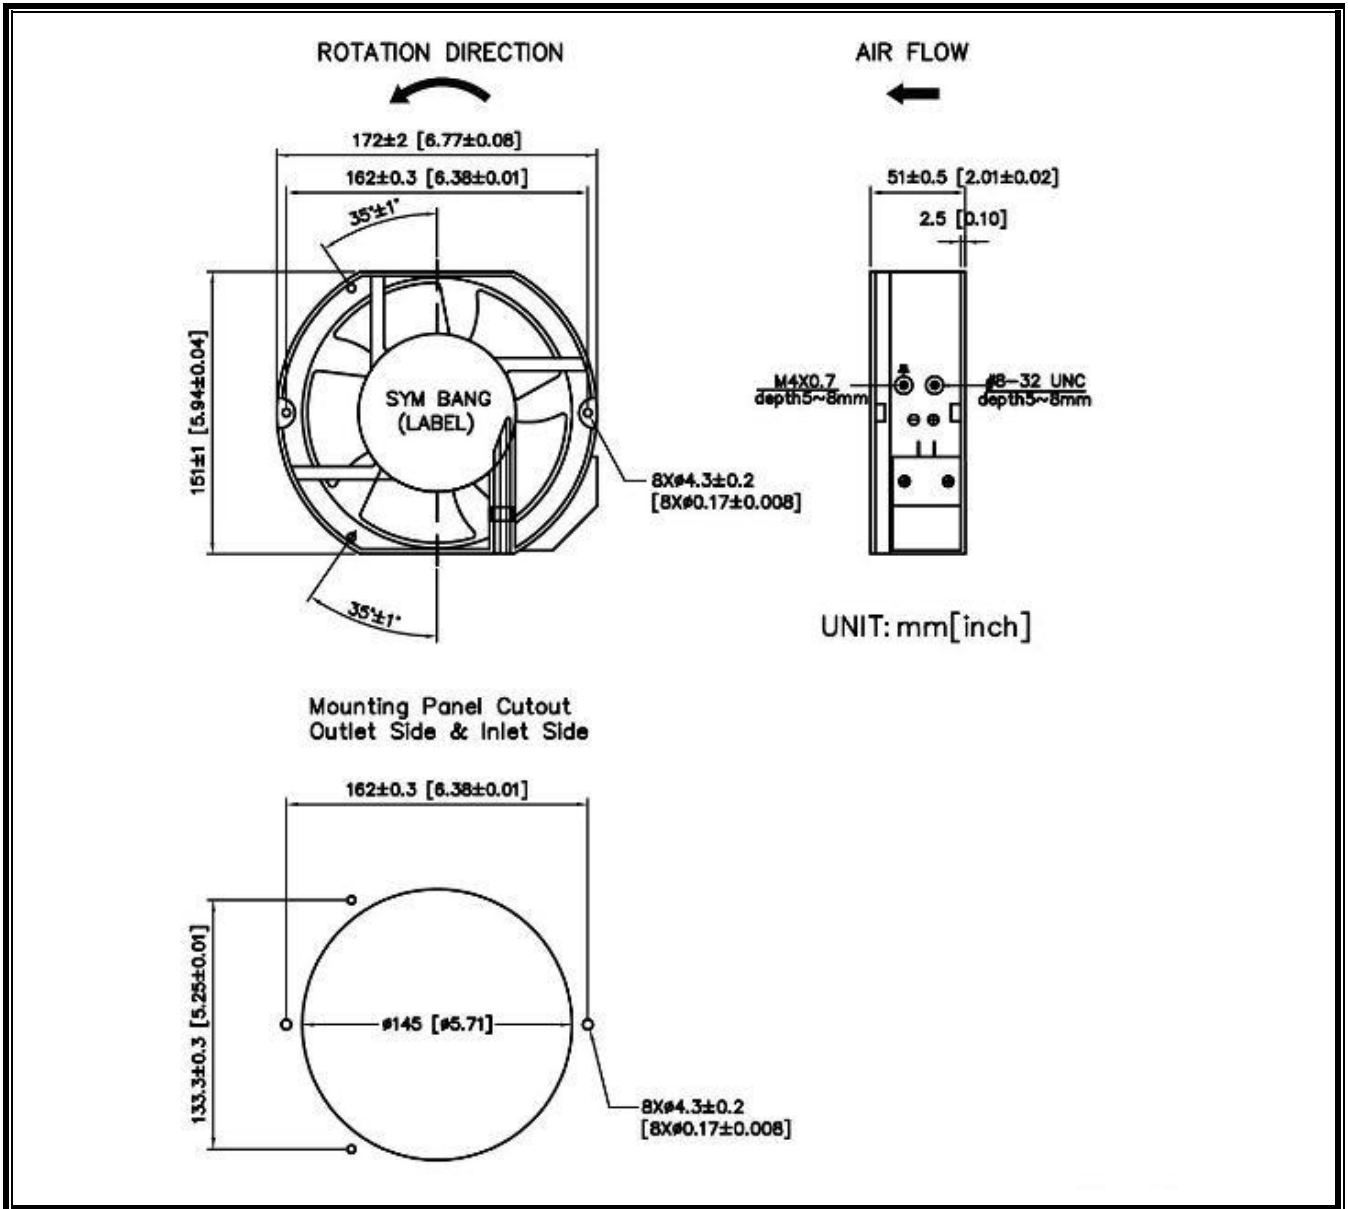

## G. Airflow Performance

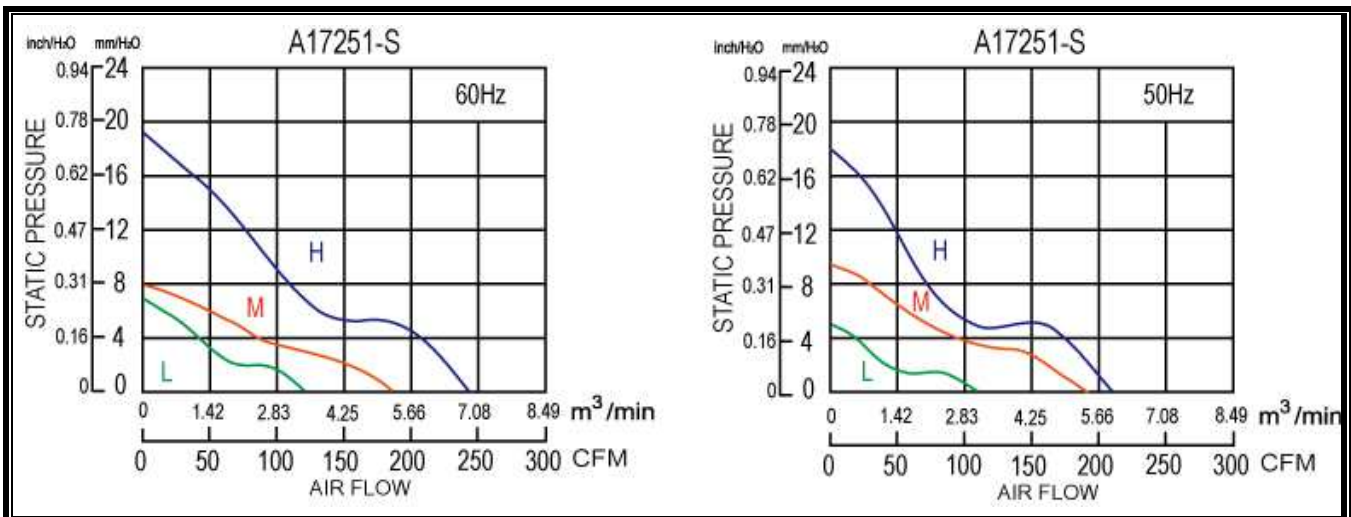

# ACTIVA INC.

## H. Notes:

- 1.1 Please do not touch and push fan blade with fingers or others, fan blade and bearings may be damaged and it causes noise defect.
- 1.2 Do not carry the fan by its lead wires.
- 1.3 If the AC fan or DC fan which with signal functions does not have the polarity protection function, the connection of the colored wires should be red + red, and black + black, or else.
- 1.4 For the models without reverse connection of polarity protection, please do not connect the lead wire in reverse.
- 1.5 Please don't install this fan in series with 2x voltage inputs. For example, if a single fan rated at 115VAC (12VDC), then don't install two of them in series with 230VAC (24VDC) input.
- 1.6 Activa Inc has reserves the right to substitute the specification without prior notice.