

# 5G Industrial Router

F-NR120



## Introduction

F-NR120 is a wireless communication router for the Internet of Things, which uses public 3G/4G/5G networks to provide users with wireless long-distance big data transmission functions. The product has been widely used in the M2M industry in the IoT industry chain, such as smart grid, smart transportation, smart home, supply chain automation, industrial automation and other fields.



Industrial-grade Design

- ▶ High-performance industrial-grade wireless module
- ▶ High-performance industrial-grade 32-bit communication processor
- ▶ Using metal shell, protection grade IP30.
- ▶ Wide power input range 9~36V



Stability & Reliability

- ▶ WDT Watchdog design
- ▶ Anti-dropping mechanism to ensure that the data terminal is always online
- ▶ Built-in 1.5KV electromagnetic isolation protection for Ethernet interface
- ▶ RS232/RS485 interface, power and data isolation with CSA, UL and IEC standards
- ▶ SIM/UIM card interface built-in 15KV ESD protection
- ▶ Built-in reverse phase protection and over voltage protection for power interface



Standard & Convenience

- ▶ Standard RS232, RS485, CAN port Ethernet and WIFI Interface
- ▶ Provide standard wired WAN port (support standard PPPOE protocol)
- ▶ Plug and Play
- ▶ Multiple working mode options
- ▶ Configuration and maintenance interface
- ▶ Support DIN rail
- ▶ Support local and remote WEB mode or CLI mode

# 5G Industrial Router F-NR120



High Performance

- ▶ Multiple WAN connection methods, include Static IP/DHCP/PPPOE/DHCP-4G/5G
- ▶ Support 3G/4G/5G and wired WAN dual link backup (Optional)
- ▶ VPN Tunnel: PPTP/L2TP/IPSEC/OPENVPN/GRE
- ▶ Remote management SYSLOG/SNMP/TELNET/SSH/HTTPS
- ▶ Support local upgrade and remote upgrade
- ▶ Import and export configuration files
- ▶ NTP / Build-in RTC
- ▶ Support DDNS
- ▶ Support VLAN, MAC address clone
- ▶ WIFI Support 802.11b/g/n/ac. Support AP/AP Client/Bridge mode
- ▶ WIFI Support WEP, WPA, WPA2 and other encryption methods
- ▶ Support Private APN SIM card
- ▶ Support APN/VPDN
- ▶ Support DHCP server and DHCP client, NAT, DMZ, QOS
- ▶ Support TCP/IP, UDP, FTP (Optional), HTTP and other network protocols
- ▶ Support SPI firewall, VPN pass through, ACL, URL filter
- ▶ Support hardware encryption (Optional)
- ▶ Traffic statistics, real-time display of data transmission rate

## Product Specification

Cellular Specification	
Items	Contents
Module	Industrial grade wireless module
Frequency	5G NR: n1/n2/n3/n5/n7/n8/n20/n28/n41/n66/n71/n77/n78/n79 LTE:B1/B2/B3/B4(66)/B5(18/19/26)/B7/B8/B12(17)/B13/B14/B20/B25/B26/B28/B29/B30/B38/B39/B40/B41/B42/B43/ B46/ B48/B71 Remarks: Different modules support different network standards
Bandwidth	5G NR: DL 3.4Gbps, UL 350Mbps LTE Cat20: DL 2.0Gbps, UL 150Mbps HSPA+: DL 42Mbps, UL 5.76Mbps
Power	< 23dBm
Sensitivity	<-97dBm

# 5G Industrial Router F-NR120



## WIFI Specification

Items	Contents
<b>Frequency</b>	IEEE802.11b/g/n, 2.4G, AP mode, Station mode (Optional) IEEE802.11ac, 5.8G, AP mode, Station mode (Optional)
<b>Bandwidth</b>	IEEE802.11b/g: 54Mbps IEEE802.11n: 300Mbps IEEE802.11ac: 866Mbps
<b>Security</b>	WEP, WPA, WPA2
<b>Power</b>	26dBm (11b), 21dBm (11ac/MCS7/HT40), 20dBm (11ac/MCS9/HT80)
<b>Sensitive</b>	<-72dBm @ 54Mbps

## Hardware System

Items	Contents
<b>CPU</b>	Industrial-grade 32-bit communication processor
<b>FLASH</b>	Nor flash 16MB, NAND flash 128MB
<b>DDR3</b>	512MB
<b>Interfaces</b>	
<b>Items</b>	<b>Contents</b>
<b>WAN</b>	1 x 10/100/1000M Ethernet (RJ45), Auto MDI/MDIX, Built-in 1.5KV electromagnetic isolation protection Remarks: Can be used as LAN port
<b>LAN</b>	1*10/100/1000M Ethernet (RJ45), Auto MDI/MDIX, Built-in 1.5KV electromagnetic isolation protection 1 x RS232/RS485, Built-in 1.5KV electromagnetic isolation protection Data bit: 5, 6, 7, 8 Stop bit: 1, 1.5 (Optional), 2 Check: NONE, EVEN, ODD, SPACE (Optional) Baud rate: 2400~115200bits/s
<b>Serial</b>	1*CAN2.0
<b>Indicators</b>	"WIFI", "Online", "PWR", "SYS"
<b>Antenna</b>	Cellular: 4 standard SMA female antenna interfaces, characteristic impedance 50 ohms WIFI: 2 standard SMA male antenna interfaces, characteristic impedance 50 ohms GPS: 1 calibrated SMA female antenna interface, characteristic impedance 50 ohms (optional) Standard drawer type user card interface, support 1.8V/3V SIM/UIM card, built-in 15KV ESD protection Support dual SIM card
<b>Power</b>	Terminal power socket
<b>Reset button</b>	Through this button, the parameter configuration can be restored to the factory

# 5G Industrial Router F-NR120




<b>Power Supply</b>	
<b>Items</b>	<b>Contents</b>
<b>Standard</b>	DC 12V/1.5A
<b>Range</b>	DC 9 ~36V
<b>Consumption</b>	<1.2A (12V)
<b>Physical Properties</b>	
<b>Items</b>	<b>Contents</b>
<b>Shell</b>	Metal shell, protection grade IP30
<b>Size</b>	135 x 110 x 43mm (Does not include antenna and mounting parts)
<b>Weight</b>	500g
<b>Others</b>	
<b>Items</b>	<b>Contents</b>
<b>Operating Temperature</b>	-35~+75°C (-31~+167°F)
<b>Storage Temperature</b>	-40~+85°C (-40~+185°F)
<b>Relative Humidity</b>	95% (No condensation)
<b>GPS (Optional)</b>	
<b>Items</b>	<b>Contents</b>
<b>GPS Module</b>	Industrial GPS module
<b>Receiver Type</b>	50 channels, GPS L1 (1575.42MHz) C/A code Support WAAS, EGNOS, MSAS, GAGAN, compatible with GALILEO
<b>Maximum Update Rate</b>	4Hz
<b>Accuracy</b>	Locate: 2.5mCPE    SBAS: 2.0mCPE
<b>Capture</b>	Cold start: 29S Warm start: 29S Auxiliary start: <1S Hot start: <1S
<b>Sensitive</b>	Tracking: -160dBm Recapture: -160dBm Cold start: -144dBm
<b>Timing Accuracy</b>	RMS: 30ns 99%: <60ns Graininess: 21ns
<b>Time Pulse</b>	0.25~1000Hz
<b>PPS</b>	Support, the rising edge of the pulse is aligned with UTC time

# 5G Industrial Router F-NR120



## Topology

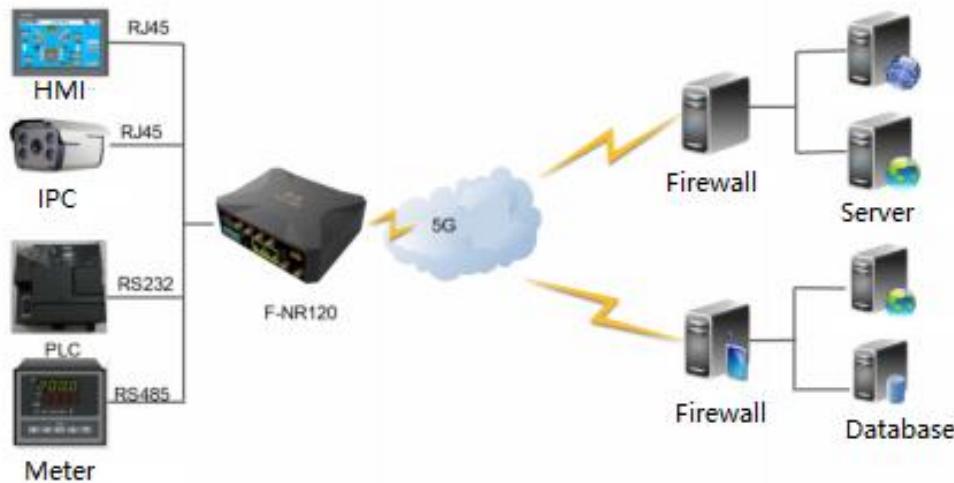

## Dimension (mm)



## Order Information

Models	Description
F-NR120	Cellular (5G NR), 2.4G/5G WIFI, SIM*2, GPS (Optional)