


# D 20070



Ø200x70mm(Ø7.87"x2.76")

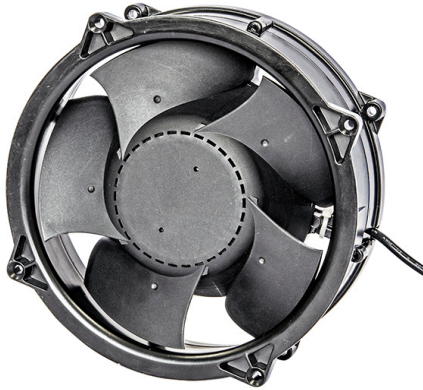

HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.76 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP42 (Special IP Rating On Request)


# 200

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D20070V24H	24	4.50	108.0	4600	2.66	67.6	517.7	14.7	69.5
D20070V48H	48	2.30	110.4	4600	2.66	67.6	517.7	14.7	69.5
D20070V48L	48	0.75	36.0	2900	1.24	31.4	319.1	9.30	58.0

## DIMENSION

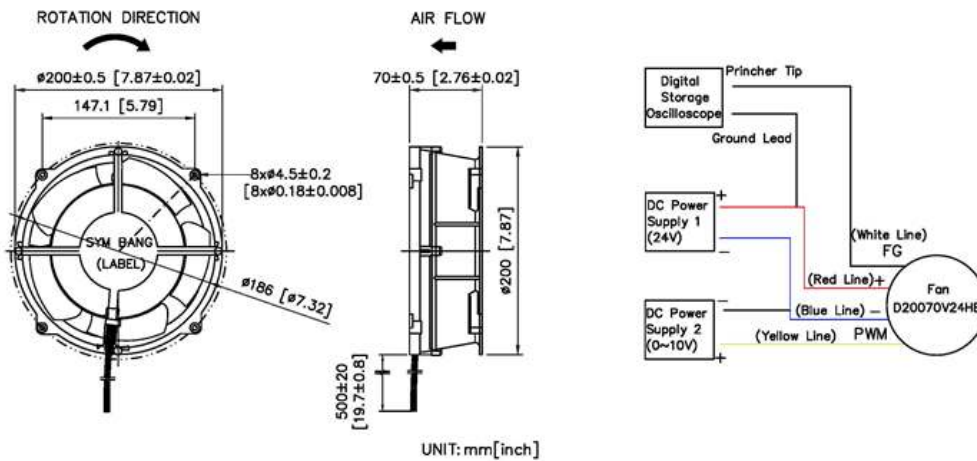

# AIR PERFORMANCE

