

Type : QXG7 (4.3-Inch Touch Screen)

3 / 11



The front of horizontal type




The front of vertical type




The back of horizontal type



The Back of vertical type

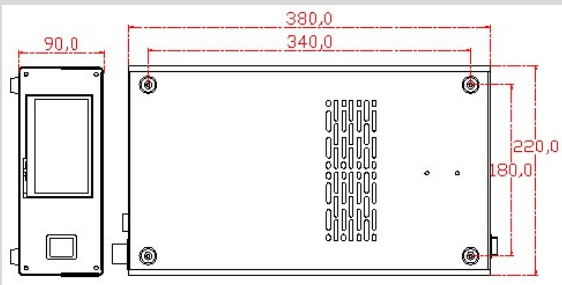

Horizontal Type
Generator Size: 380*220*90mm
Foot Size: 340*180mm

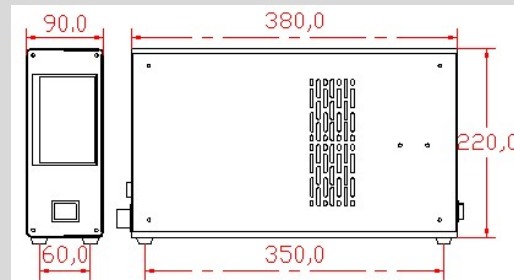

Vertical Type
Generator Size: 380*90*220mm
Foot Size: 350*60mm

Specification :

Type	QXG7-1500	QXG7-3000
Ultrasonic Power	600-1500W	1800-3000W
Frequency	17-200KHZ	17-40KHZ
Output Current MAX	5.0A	8.0A
Power Adjustment	0-100%	
Timer	0-99 H 59M 59S Adjustment	
Remote Control	Remote Control Ultrasonic ON/OFF Contact signal control mode	
Fault Alarm	Normally closed signal output, custom upper/lower current value	
Anti-noise function	The anti-noise function effectively relieves wheezing	
Working Voltage	AC220V ±10% 50HZ (or AC110)	
Size	380*220*90mm horizontal type 380*90*220mm vertical type	
Weight	6.2KG	

Connection Port :

AC220V or AC 110 Power Supply	1.5m power cord + European standard / American standard plugs
Ultrasonic Output	PW20-2P
Signal Control	5.08-4P Terminal (Remote Control + Fault Alarm)

Optional Features :

Matching Models	Function Introduction	Signal Port
QXG7-T	RS485 communication, modbusRTU protocol	Module Port
QXG7-R	Heating function, 0-100°C sink temperature control	Module Port
QXG7-2/3/4F	Multi-frequency function, matching multi-frequency transducer	Module Port
QXG7-G	Over lock machine, custom over lock time and password	No
QXG7-K	Remote control, 8 meter external control line	Module Port
Content couplet module	WIFI, Ethernet and 4G are optional	Module Port