

# Single Black Panel

## Key Characteristics:

- No moving parts – completely sealed against the environment
- Enhanced touch activated - operation by hand, gloves or tools
- Switching functions - momentary, toggle, prolonged, continuous, timer and programmable
- Optional Smart Switch technology - self-diagnostic, Wi Fi, Bluetooth and IoT capabilities



## Electrical Data

---

Actuation Force	3-5 N
Make Impulse Time	125-300 mSec

---

## Mechanical Data

---

Housing Materials	Aluminium 6061 T651
Connection	Wires 16 AWG, length 12"
Finish	Anodize Color – Natural/Black & Laser Engraving

---


## Environmental Data

---

Operating Temperature	-20°C to +75°C
Storage Temperature	- 40°C To +85°C
IP Protection	IP69K

---

## Technical Drawing

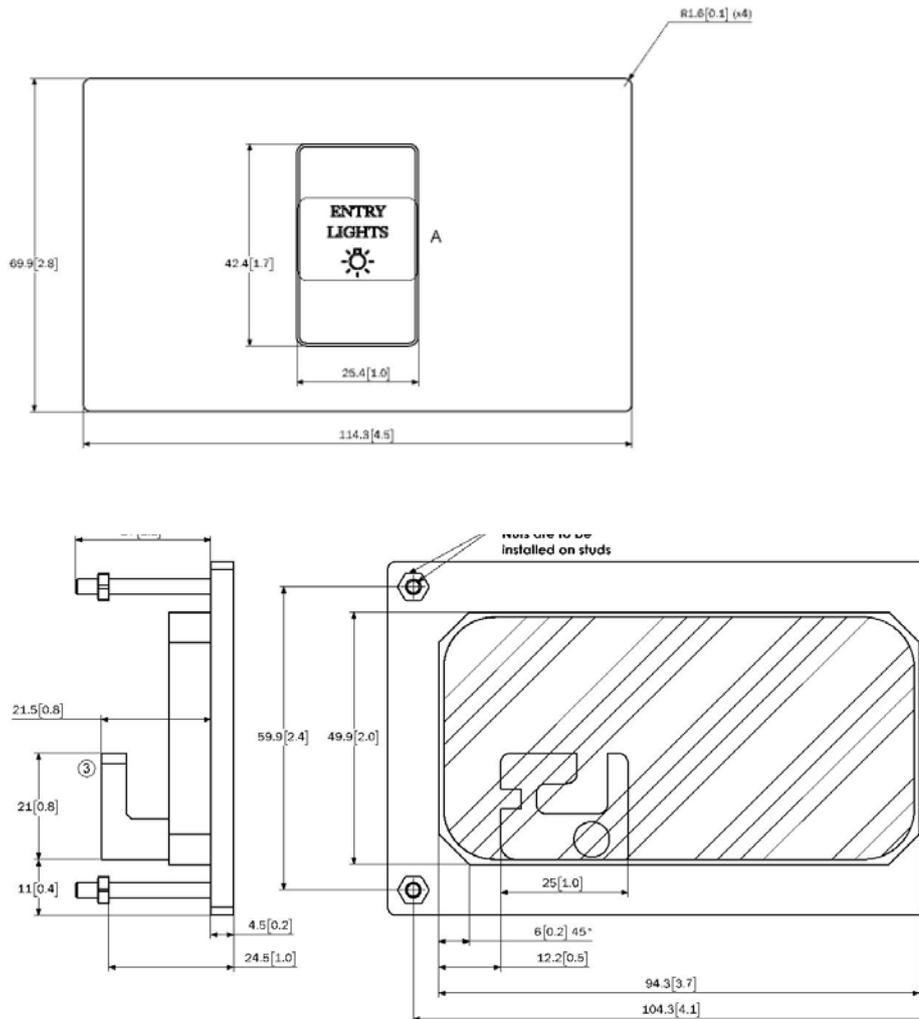

\*The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Users should evaluate the suitability and test each product selected for their own applications.