

DC FAN

20mm~254mm




DC17040

Size: 170×170×40mm



General Specification

Frame / Impeller: Plastic
 Lead Wire: AWG#24 or
 Equivalent (+)Red, (-)Black
 Ball Bearing 50,000Hrs(40°C)
 Sleeve Bearing 30,000Hrs(40°C)
 Operating temperature: -10°C~+70°C
 Storage temperature: -40°C~+70°C

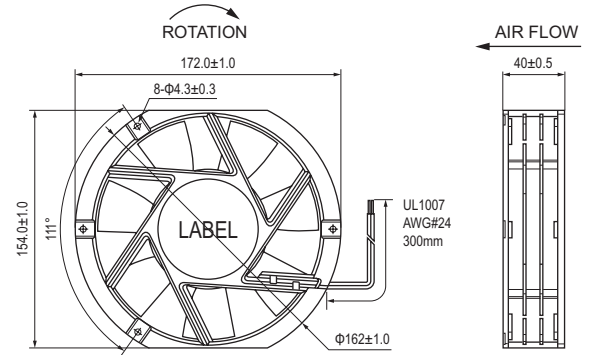

Model Number	# Bearing Type	Rated Voltage (VDC)	Operating Voltage (VDC)	Input Current (A)	Input Power (W)	Speed (RPM)	Max Air Volum		Max Static Pressure		Noise (dB-A)	Weight (g)
							(CFM)	m ³ /min	Inch-H ₂ O	Pa		
DC17040#12H	B	12	7.0~13.8	2.00	24.00	3000	194.17	5.50	0.56	139.35	51.0	503.0
DC17040#12M	B	12	7.0~13.8	1.00	12.00	2500	160.99	4.56	0.39	96.20	43.0	503.0
DC17040#12L	B	12	7.0~13.8	0.70	8.40	2000	128.93	3.65	0.24	60.11	37.0	503.0
DC17040#24U	B	24	14.0~27.6	1.50	36.00	3500	221.04	6.26	0.74	184.07	59.0	503.0
DC17040#24H	B	24	14.0~27.6	0.90	21.60	3000	194.17	5.50	0.56	139.35	51.0	503.0
DC17040#24M	B	24	14.0~27.6	0.60	14.40	2500	160.99	4.56	0.39	96.20	43.0	503.0
DC17040#24L	B	24	14.0~27.6	0.40	9.60	2000	128.93	3.65	0.24	60.11	37.0	503.0
DC17040#48U	B	48	28.0~56.0	0.80	38.40	3500	221.04	6.26	0.74	184.07	59.0	503.0
DC17040#48H	B	48	28.0~56.0	0.60	28.80	3000	194.17	5.50	0.56	139.35	51.0	503.0
DC17040#48M	B	48	28.0~56.0	0.40	19.20	2500	160.99	4.56	0.39	96.20	43.0	503.0
DC17040#48L	B	48	28.0~56.0	0.20	9.60	2000	128.93	3.65	0.24	60.11	37.0	503.0


DC17251

Size: 170×51mm



General Specification

Frame / Impeller: Plastic
 Lead Wire: AWG#24 or
 Equivalent (+)Red, (-)Black
 Ball Bearing 50,000Hrs(40°C)
 Sleeve Bearing 30,000Hrs(40°C)
 Operating temperature: -10°C~+70°C
 Storage temperature: -40°C~+70°C

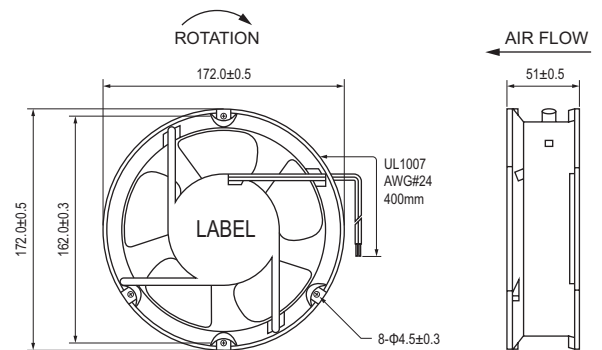

Model Number	# Bearing Type	Rated Voltage (VDC)	Operating Voltage (VDC)	Input Current (A)	Input Power (W)	Speed (RPM)	Max Air Volum		Max Static Pressure		Noise (dB-A)	Weight (g)
							(CFM)	m ³ /min	Inch-H ₂ O	Pa		
DC17251#12U	B	12	7.0~13.8	3.00	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
DC17251#12H	B	12	7.0~13.8	2.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
DC17251#12M	B	12	7.0~13.8	1.50	18.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
DC17251#12L	B	12	7.0~13.8	1.00	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
DC17251#24U	B	24	14.0~27.6	1.50	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
DC17251#24H	B	24	14.0~27.6	1.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
DC17251#24M	B	24	14.0~27.6	0.70	16.80	3000	220.85	6.25	0.52	128.57	51.0	740.0
DC17251#24L	B	24	14.0~27.6	0.50	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
DC17251#48U	B	48	28.0~56.0	0.80	38.40	4000	305.29	8.65	1.14	283.51	67.0	740.0
DC17251#48H	B	48	28.0~56.0	0.60	28.80	3500	257.88	7.30	0.71	176.81	59.0	740.0
DC17251#48M	B	48	28.0~56.0	0.50	24.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
DC17251#48L	B	48	28.0~56.0	0.40	19.20	2500	185.24	5.25	0.37	92.77	44.0	740.0