

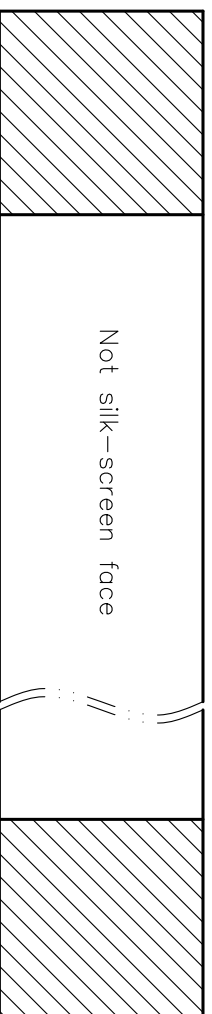
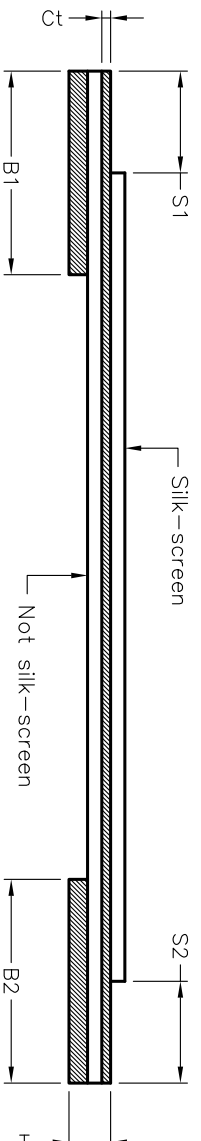



BOM				
No.	Item	Specification	Remarks	
1	Insulation film	White PET(43 μ m)	flame retardant rating VW-1	
2	Reinforcement plate	Blue PET(225 μ m)		
3	Conductors (Flat copper wire)	Thickness	0.05mm	± 0.005
		Width	0.8mm	± 0.03
4	Number of Conductors	Plating	Sn	$\geq 1\mu$ m
		N	21	

Dimensions (Unit: mm)				
1	Total length	TL	160	± 3
2	Total width	W	27	± 0.15
3	Margin width	M	1.25	± 0.1
4	Pitch	P	1.25	± 0.1
5	Span	Pt	25.0	± 0.15
6	Thickness of connection area	T	0.3	± 0.05
		S1	5	± 1.0
7	Strip length	S2	5	± 1.0
		B1	10	± 1.5
8	Reinforcemen length	B2	10	± 1.5

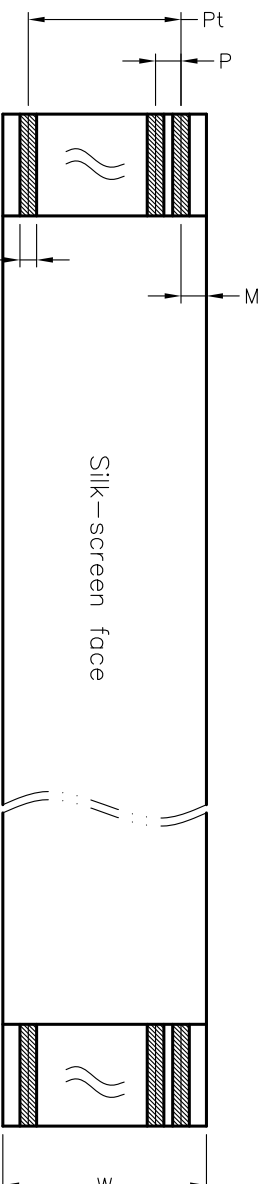

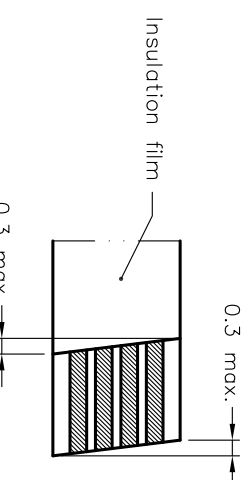

Dongguan Jinda Electronics Co., Ltd.

GENERAL TOLERANCE		SCALE:	DRAWN:	DATE:
XX: ± 0.40		3.5:1	Luoshengrong	2024.4.20
X: ± 0.30		UNIT:	CHECK:	DATE:
X: ± 0.25		mm		
.XX ± 0.15		SIZE:	APPROVE:	DATE:
		A4	Xiaozhi jun	2024.4.20

DOCUMENT NO:

PARTS NO: A1.25x21x160-551010b5T

TITLE: DRAWING

REV. A

SHEET: 1/1