
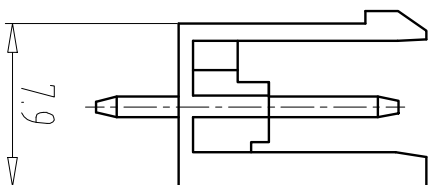
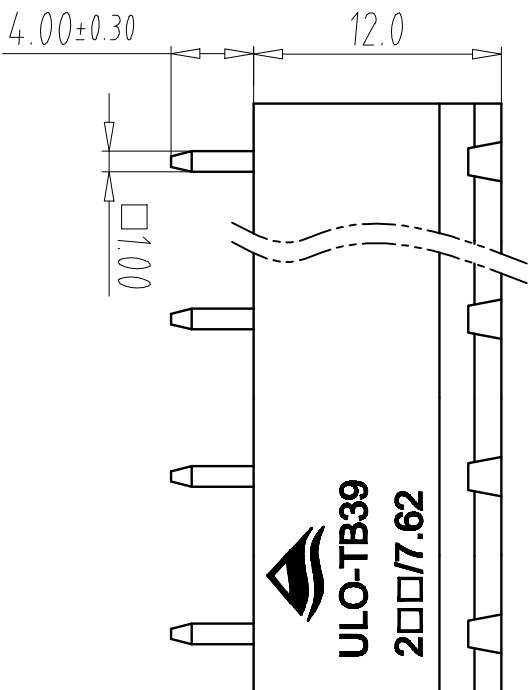


FILE: 2021-D01VULO

REV	ECN NO.	CONTENT	CHK	DATE

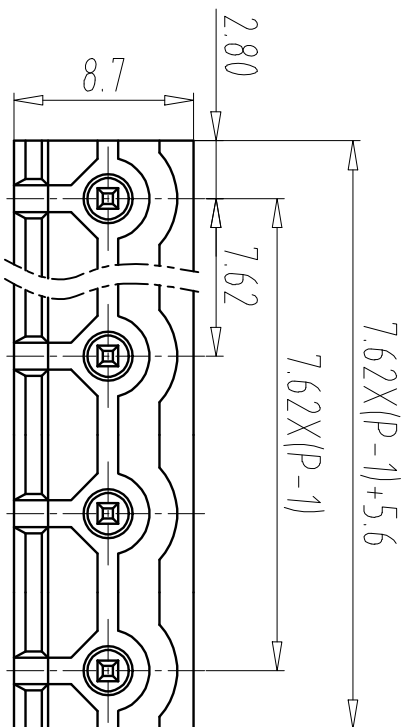

NOTES1:
 UL Standard
 1. Rating voltage/current: 300V/16A
 2. withstanding voltage: AC1600V/1Min
 IEC Standard
 1

Parameter	Value
Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	630V
Rate Current(A)	20A

NOTES2:
 1.Housing: PA66 (UL94V-0)
 2.Solder Pin: Brass (Sn Plated)

NOTES3:
 1.Pitch: 7.62mm Poles: 02-24P
 2.Operating temperature: -40°C~+105°C
 3.Stripping length: 7-8mm
 4.RoHS Compliance

How to order
 UL0-TB39 - 2V/7.62 - XXP - Y 0 0 0A

Certificate Series NO. Code

Customer requirements

color:
 1:Grey 2:Blue 3:Black
 4:Green 5:Orange 6:Red
 7:transparent 8:Yellow 9:White

Total Pitch Tolerances		Nominal dimension range	
In mm		In mm	
over	0	over	0
to	30	to	30
over	53	to	53
to	70	to	70
over	90	to	90
to	115	to	115
over	150	to	150
to	200	to	200
over	250	to	250
to	320	to	320
over	0	to	0
to	30	to	30
over	53	to	53
to	70	to	70
over	90	to	90
to	115	to	115
over	150	to	150
to	200	to	200
over	250	to	250
to	320	to	320
over	0	to	0
to	10	to	10
over	100	to	100
to	150	to	150
over	0	to	0
to	100	to	100
over	150	to	150
to	200	to	200

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.11	MM	SHEET/OF 1/1
CHK	DATE	SCALE	1:1	A4	
APP	DATE	NAME	UL0-TB39-2V/7.62-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.
 宁波欧路电子有限公司

DWGNO: UL0TB39Y000A