

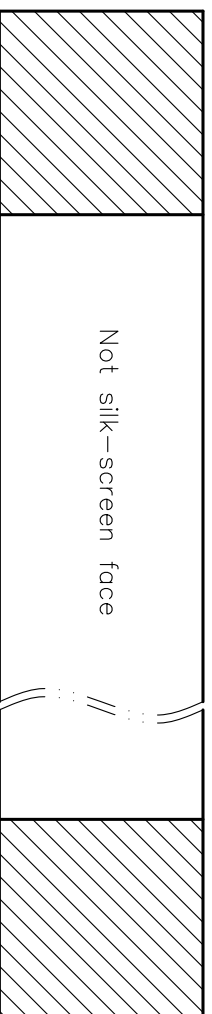
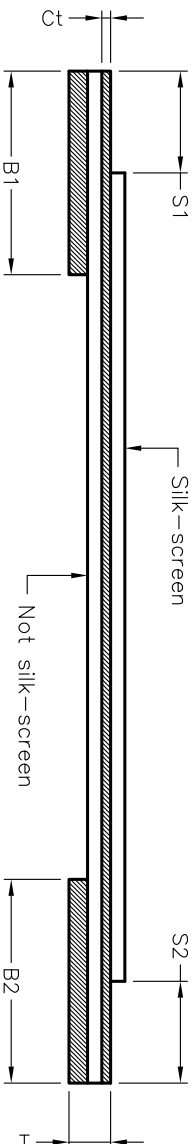



BOM				
No.	Item	Specification	Remarks	
1	Insulation film	White PET(43 μ m)	flame retardant rating VW-1	
2	Reinforcement plate	Blue PET(225 μ m)		
3	Conductors (Flat copper wire)	Thickness	0.05mm	± 0.005
		Width	0.8mm	± 0.03
4	Number of Conductors	Plating	Sn	$\geq 1\mu$ m
		N	28	

Dimensions (Unit: mm)				
1	Total length	TL	200	± 3.5
2	Total width	W	36.25	± 0.15
3	Margin width	M	1.25	± 0.1
4	Pitch	P	1.25	± 0.1
5	Span	Pt	33.75	± 0.15
6	Thickness of connection area	T	0.3	± 0.05
		S1	5	± 1.0
7	Strip length	S2	5	± 1.0
		B1	10	± 1.5
8	Reinforcemen length	B2	10	± 1.5

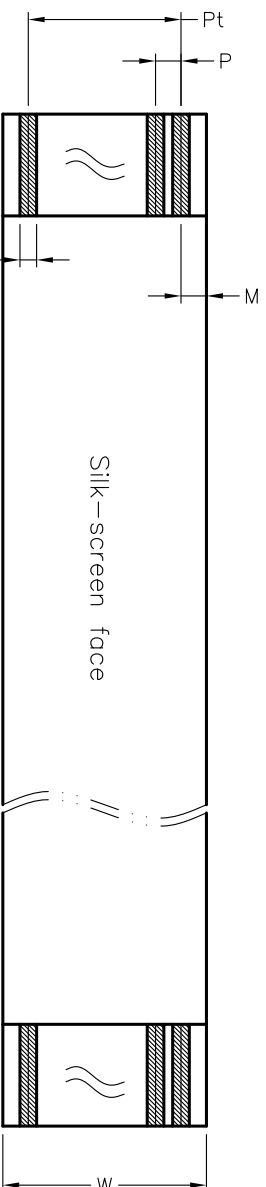

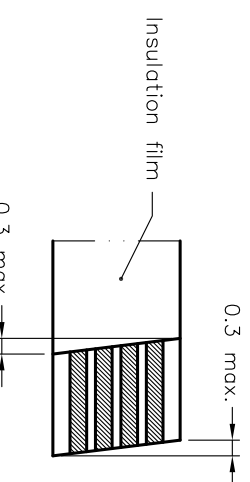

Dongguan Jinda Electronics Co., Ltd.

GENERAL TOLERANCE		SCALE:	DRAWN:	DATE:	DOCUMENT NO:	TITLE:	REV.
XX	± 0.40	3.5:1	Luoshengrong	2024.4.20	A1.25x28x200-551010b5T	DRAWING	A
X	± 0.30			DATE:			
X	± 0.25	UNIT:	mm	DATE:			
.XX	± 0.15	SIZE:	A4	DATE:			
		CHECK:		DATE:			
		APPROVE:	Xiaozhi jun	DATE:	2024.4.20		