


1
RoHS Compliance


6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0		New Version Release		Song	2024-02-22

Circuitry




OFF

(ON)




Mounting

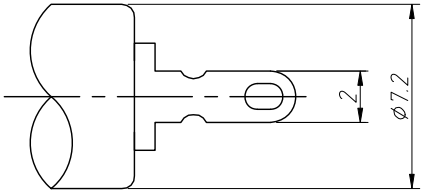

Notes:

- Rating: 3A 125V AC, 1A 250V AC
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ/500VDC Min
- Withstanding Voltage: AC1000V/1Min
- Operating Temperature: -25°C ~ +85°C
- Electrical Life: 50000 Cycles
- Button Color: Red
- Packing: Bag

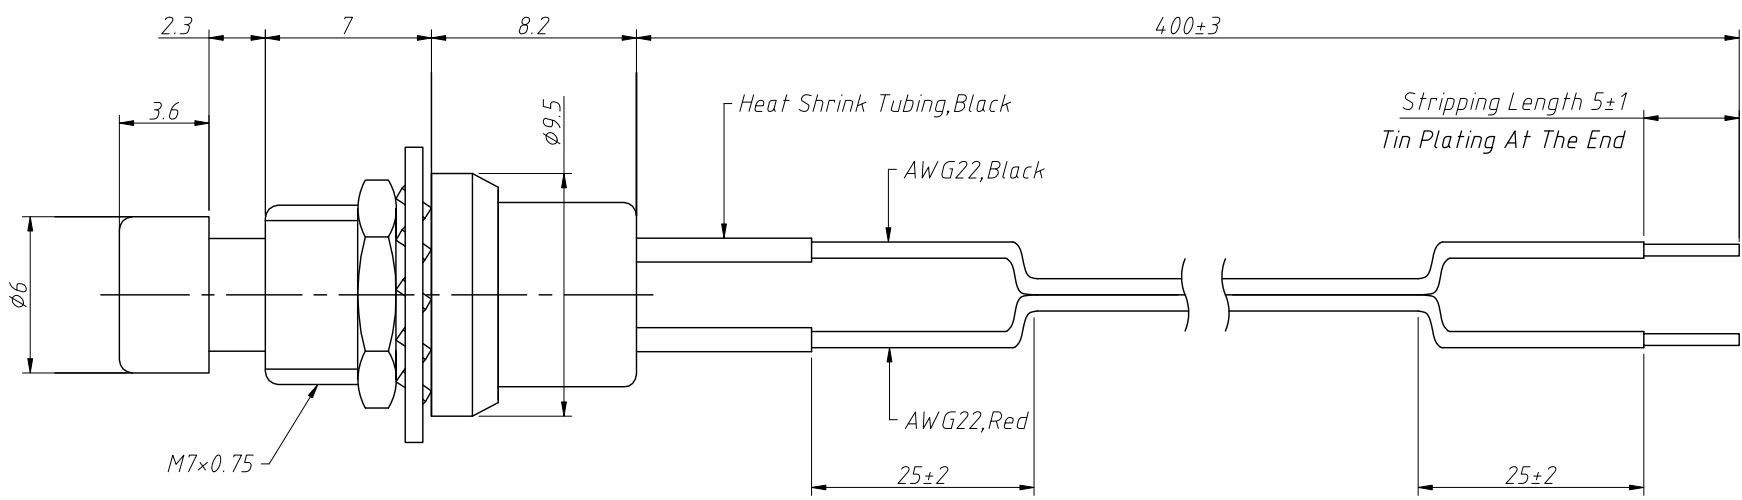

ANGLE TOLERANCE	PROJECTION	Description:			
±3°		Momentary Pushbutton Switch			
GENERAL TOLERANCE	UNITS	mm	P/N:	SW-PBS-004D-40G-CT	
x.x ±0.30	SHEET SIZE	A4			
x.xx ±0.20	Draw:	Song	2024-02-22	CONNTERM	
x.xxx ±0.10	Check:	Daniel	2024-02-22		