

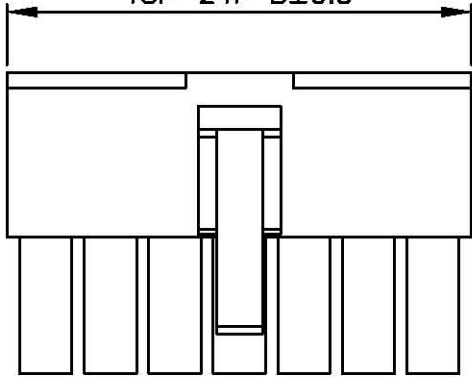


2P- 8P B±0.3  
 10P-16P B±0.4  
 18P-24P B±0.5

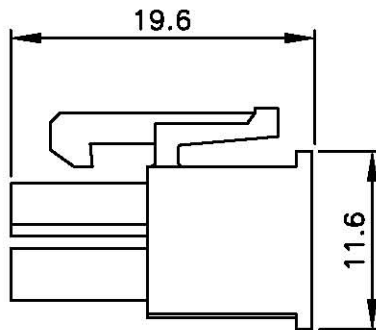


3.45±0.1

2P- 8P A±0.2  
 10P-16P A±0.3  
 18P-24P A±0.4

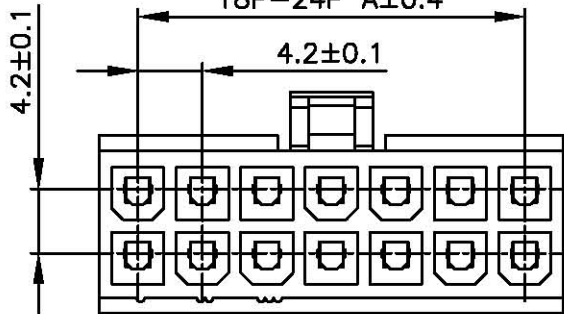

JS-1149-04 ~ 24

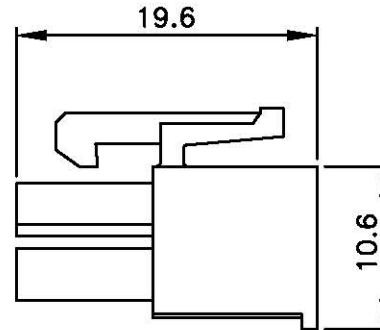

JS-1149-02

■ SPECIFICATIONS

- Voltage Rating : 250 V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : -40°C to +105°C
- Contact Resistance : 20mΩ max

■ HOUSING

- Part No. : JS-1149-XX
- Poles : 2 - 24
- Material : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
2	JS-1149- 2	----	5.40
4	JS-1149- 4	4.20	9.60
6	JS-1149- 6	8.40	13.80
8	JS-1149- 8	12.60	18.00
10	JS-1149-10	16.80	22.20
12	JS-1149-12	21.00	26.40
14	JS-1149-14	25.20	30.60
16	JS-1149-16	29.40	34.80
18	JS-1149-18	33.60	39.00
20	JS-1149-20	37.80	43.20
22	JS-1149-22	42.00	47.40
24	JS-1149-24	46.20	51.60



尚訊電子工業股份有限公司

CHYAO SHIUNN  
 ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	DATE
	2:1	mm	.0 ±0.3	ECR	DG200312-004	2003/12/23
CHECKED BY	PROJ	VER NO.	.00 ±0.2	ECR	200404-014	2004/04/20
		D2	.000 ±0.1			
DRAWN BY	DATE	SIZE	ANGLE			
	2004/04/20	A4	0° ±			
			.0° ±			

PART NO JS-1149-XX

4.20mm Mini-Fit D/R Power Connectors Housing