Material:
* Insulation: Nylon 6T 94V–0, Color Black
* Contact: Brass

Ordering Code:

CP35 ① ** ② P ③ * ④ H ⑤ S ⑥ 0 ⑦ – S ⑧ – LF ⑨

① Series No.
② No. of Circuits: 02~12
③ Concact type: P= Plug
④ Contact plated:
1= Matte Tin Plated over Nickel
△2 A= Selective Gold Flash Plated over 1.27μm(50μ") Nickel
B= Selective 0.38μm(15μ") Gold Plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold Plated over 1.27μm(50μ") Nickel
⑤ H= Right angle type
⑥ Mount type : S= SMT Type
⑦ 0= Standard (with Metal board lock)
⑧ S= Single Row Header
⑨ LF= Lead Free soldering process

CIRCUITS	DIM.A	DIM.B	DIM.C
2	3.00(.118)	9.65(.380)	7.3(.287)
3	6.00(.236)	12.65(.498)	10.3(.406)
4	9.00(.354)	15.65(.616)	13.3(.524)
5	12.00(.472)	18.65(.734)	16.3(.642)
6	15.00(.591)	21.65(.852)	19.3(.760)
7	18.00(.709)	24.65(.970)	22.3(.878)
8	21.00(.827)	27.65(1.089)	25.3(.996)
9	24.00(.945)	30.65(1.207)	28.3(1.114)
10	27.00(1.063)	33.65(1.325)	31.3(1.232)
11	30.00(1.181)	36.65(1.443)	34.3(1.350)
12	33.00(1.299)	39.65(1.561)	37.3(1.469)

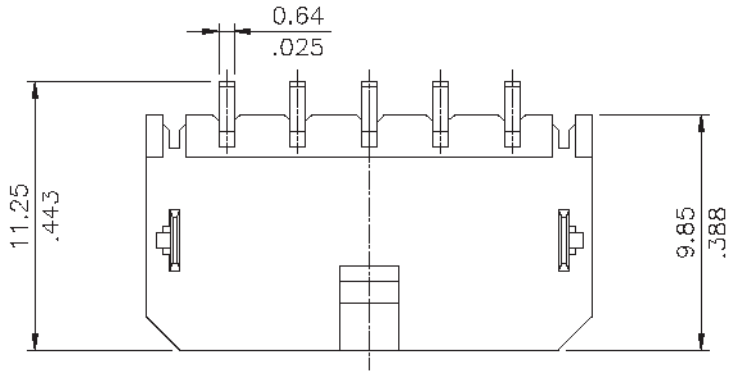

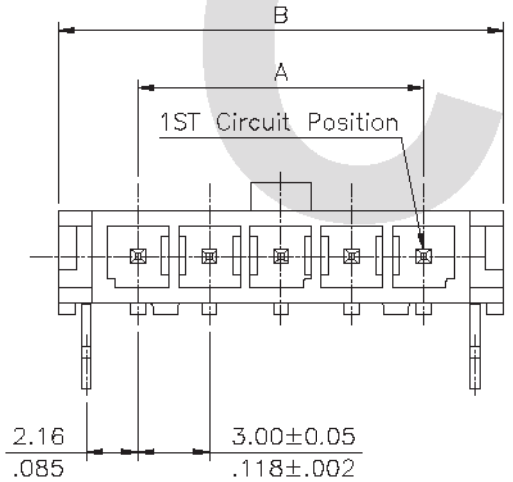

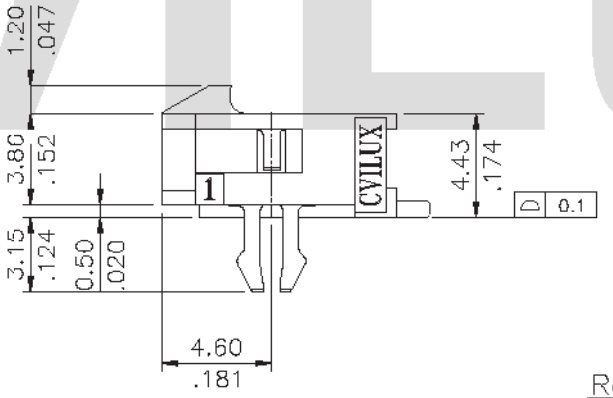

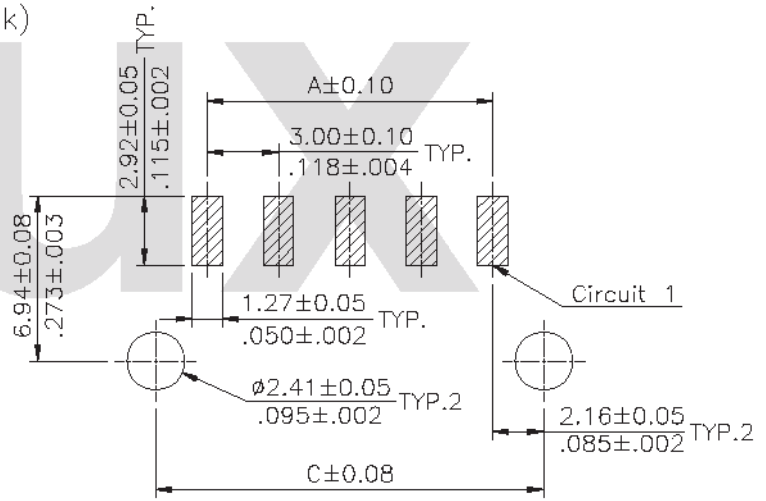

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2	Eager	11/09-07'	ECN07463
1	Eager	10/04-07'	ECN07414

CVILUX CORP. 2007.11.19 ISSUED

		DATE
DRAWN BY:	Eager	11/09-07'
ENGINEER:	Eisley	11/12-07'
CHECKED BY:	David	11/12-07'
APPROVED BY:	Alex	11/12-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 3.00mm PITCH RIGHT ANGLE SMT TYPE POWER CONN.

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP3569SB	PART NO.	CP35**P*HS0-S-LF
SCALE	3 / 1	SHEET	1 OF 1