

ROYAL OHM

SPECIFICATION FOR APPROVAL

MARITEX

Description : Carbon Film Fixed Resistors

Royal Ohm Part no.: CFR0W8JxxxxA50 (CR 1/8W +/-5%)

Approved by

Parts corresponding to RoHS Compliant: 2005-Apr.-1

Royal Electronic Fty. (Thailand) Co., Ltd.

20/1-2 Moo 2 Klong-Na, Muang

Chachoengsao 24000, Thailand

Tel: +66-38-822404-8

Fax: +66 38 98 11 90 / 82 37 65

E-mail Address: Export sales: Export@royalohm.com

Local sales: Local@royalohm.com

<http://www.royalohm.com>

P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Ms. P. Udomporn	Ms. S. Sakultala

Issue Date: 2006/04/07

1. Scope:

This specification for approval relates to Carbon Film Fixed Resistors manufactured by ROYAL OHM 's specifications.

2. Type designation:

The type designation shall be in the following form :

(Ex.)	CR	1/8W	J	10Ω
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	CR
Rated Power at 70□	0.125W at 70 □
Max. Working Voltage	200 V
Max. Overload Voltage	400 V
Dielectric Withstanding Voltage	400 V
Rated Ambient Temp.	70 □
Operating Temp.Range.	-55□ --- +155□
Resistance Tolerance	± 5 %
Resistance Range	1Ω----1MΩ

3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 □. For temperature in excess of 70 □ , the load shall be derated as shown in the figure 1.

3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)


P = Power Rating (watt)

R = Nominal Resistance (ohm)

Carbon Film Fixed Resistors

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.


Figure 1.

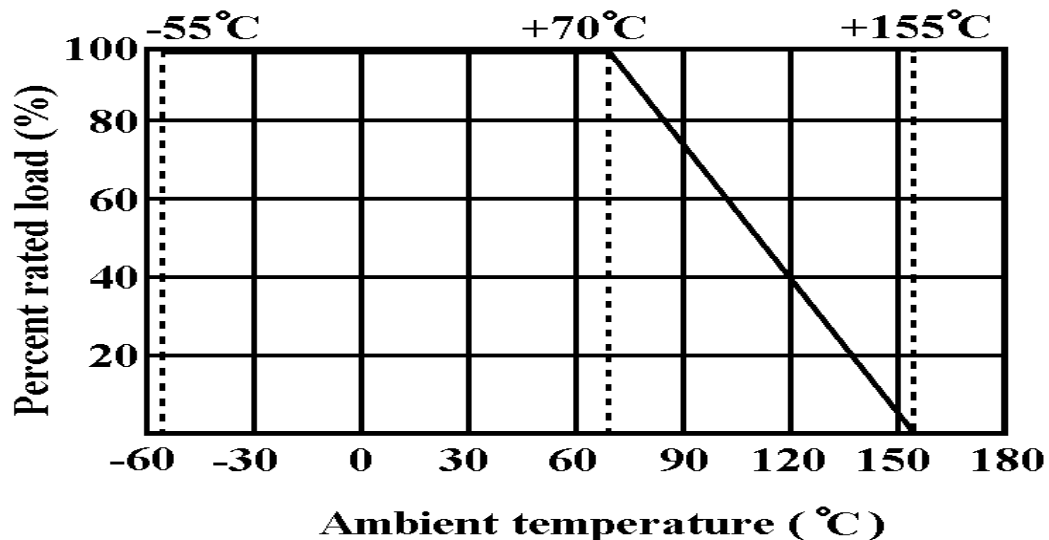

3.3 Nominal resistance :

Effective figures of nominal resistance shall be in accordance with E-24 series, and resistance tolerance shall be shown by table 1.

4. Construction :

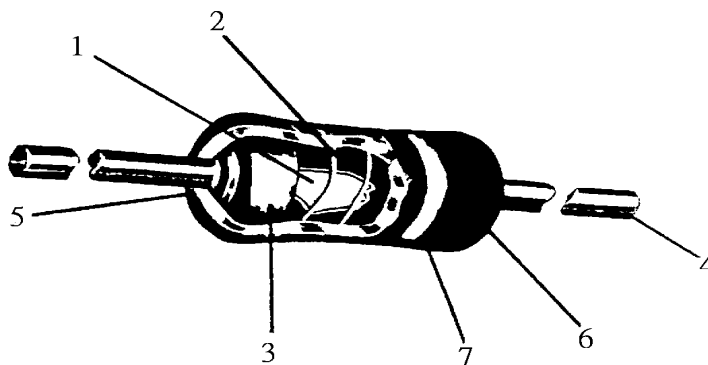

No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Film	Carbon Film
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Annealed copper wire (Electrosolder plated surface) Pb Free
5	Joint	By welding
6	Coating	Insulated resin (Color : Beige)
7	Color Code	Epoxy Resin

Carbon Film Fixed Resistors

5. Characteristics :

Characteristics	Limits	Test Methods (JIS C 5201-1)
DC. Resistance	Must be within the specified tolerance.	5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance
Temperature coefficient	Resis.Range	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \quad (\text{PPM}/^\circ\text{C})$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp.plus 100° (t2)
	T.C.R. (PPM/°C)	
	□ 10 Ω	0 □ ±350
	11Ω □ 99K	0 □ -450
	100K □ 1M	0 □ -700
	1.1M □ 10M	0 □ -1500
Short time overload	Resistance change rate is ± (1 % + 0.05Ω) Max. with no evidence of mechanical damage	5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.
Insulation Resistance	Insulation resistance is 10,000 MΩ Min	5.6 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at DC potential respectively specified in the above list for 60 +10/ -0 seconds.
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the table 1. for 60 + 10/-0 seconds.
Terminal strength	No evidence of mechanical damage.	6.1 Direct load : Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads. Twist test : Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.


Carbon Film Fixed Resistors

Characteristics	Limits	Test Methods (JIS C 5201-1)		
Resistance to soldering heat	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.	6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in $350\text{ }^{\circ}\text{C} \pm 10\text{ }^{\circ}\text{C}$ solder for 3 ± 0.5 seconds		
Solderability	95 % coverage Min.	6.5 The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : $245\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ Dwell time in solder : 2 ~ 3 seconds		
Temperature cycling	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.	7.4 Resistance change after continuous 5 cycles for duty shown below:		
		Step	Temperature	Time
		1	$-55\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$	30 mins
		2	Room temp.	10~15 mins
		3	$+155\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$	30 mins
		4	Room temp.	10~15 mins
Load life in humidity		7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ and 90 to 95 % relative humidity		
	Resistance value	□R/R		
	Normal	$\square 100\text{K}\Omega$	$\pm 3\%$	
	Type	$\square 100\text{K}\Omega$	$\pm 5\%$	
Load life		7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ ambient		
	Resistance value	□R/R		
	Normal	$\square 56\text{K}\Omega$	$\pm 2\%$	
	Type	$\square 56\text{K}\Omega$	$\pm 3\%$	

Carbon Film Fixed Resistors

6. Dimension :

Unit: mm

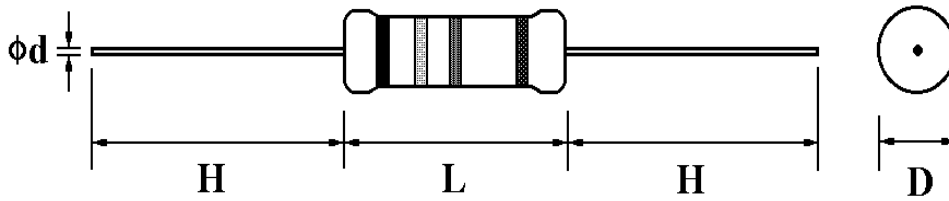


Type	Power Rating	D (Max.)	L (Max.)	d ± 0.05	H ± 3
CR	1/8W	1.85 mm	3.5 mm	0.45 mm	28 mm

7. Marking :

7.1 Resistor :

Resistors shall be marked with color coding
 colors shall be in accordance with JIS C 0802

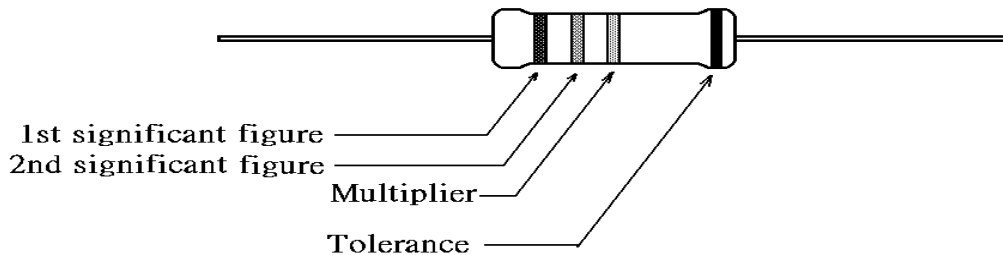

7.2 Label :

Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM


Example :

Carbon Film Resistors			
Watt :	1/8W	Val :	10E
Q'TY :	5 000	Tol :	5%
Lot :	813478	PPM :	
ROYAL OHM			

Carbon Film Fixed Resistors

8. Packing specification :


8.1 Taping dimension :

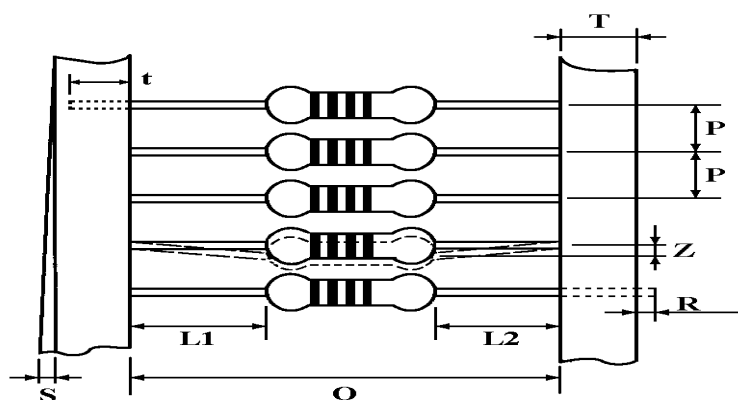

Dimensions (mm)

Type	Style	O	P	L1-L2	T	Z	R	t	S
CR-12	PT-52	52±1	5±0.3	1 Max.	6±1	1 Max.	0	4 ±1	0.5 Max.

8.2 Tape in box packing :

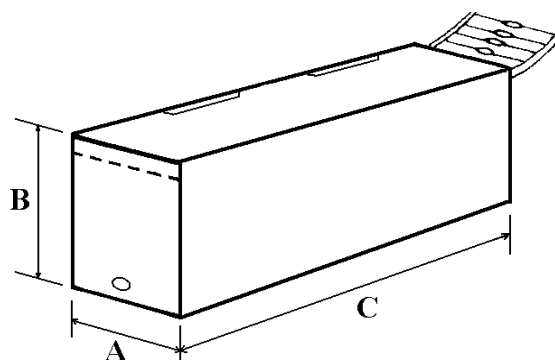

Bandoliers may also be contained in a cardboard box ("Ammopack")


Dimension (mm)

Type	Style	L (C) ±5	W (A) ±5	H (B) ±5	Quantity Per Box (pcs.)
CR-12	PT-52	250	75	66	5 000

"Ammopack" is an abbreviation of "ammunition pack"

Carbon Film Fixed Resistors

8.3 Tape on reel packing :

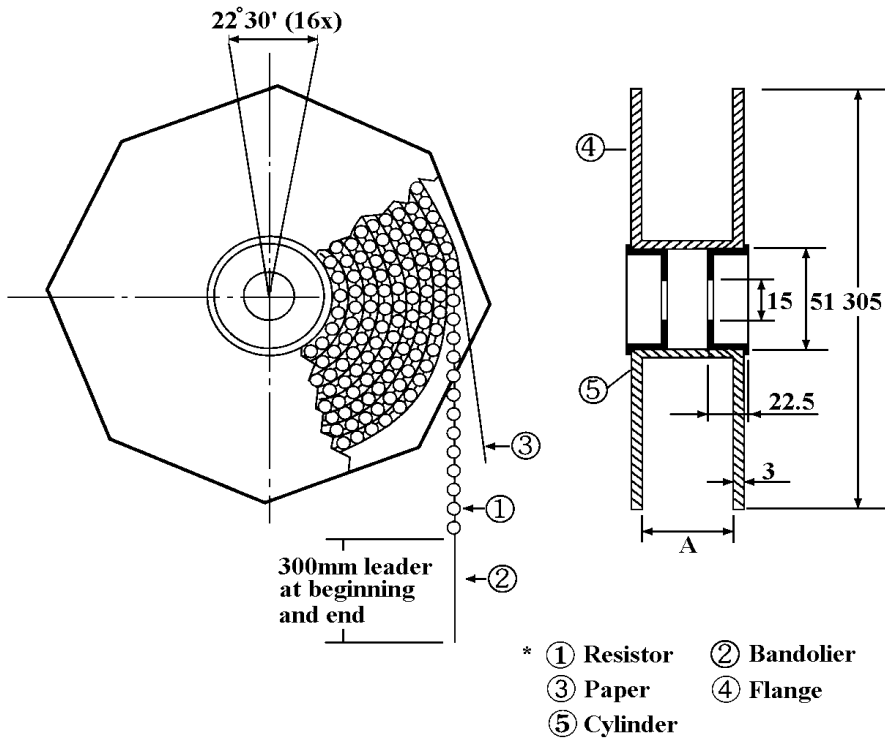

Dimension (mm) :

Type	Style	Across Flange (A)	Quantity Per Reel
CR-12	PT-52	73 ± 2	5,000 pcs.

Part Number System

Explanation of Part Number System (Carbon Film Fixed Resistors)

1 2 3 4 5 6 7 8 9 10 11 12 13 14
 C F R 0 W 8 J 0 1 0 0 A 5 0

Product Type:
 CFR = Carbon Film Fixed Resistor

Special Feature:
 0 = Standard Product
 F = Non-Flame Product
 1 = Non-Inductive Product

Wattage:

Normal size:	Small size:
W8 = 1/8W	S4 = 1/4W-S
W6 = 1/6W	S2 = 1/2W-S
W4 = 1/4W	1S = 1W-S
W2 = 1/2W	2S = 2W-S
1W = 1W	3S = 3W-S
2W = 2W	S3 = 1/3W-S
3W = 3W	
Extra Small size:	
U2 = 1/2W-SS	
1U = 1W-SS	

Tolerance:
 F ~ ± 1%
 G ~ ± 2%
 J ~ ± 5%
 K ~ ± 10%

Resistance Value:
E-24 series: the 1st digit is "0", the 2nd & 3rd digits are for the significant figures of the resistance and the 4th indicate the number of zeros following:
 "J" ~ 0.1, "K" ~ 0.01
 Ex.: 4.7Ω ~ 47J, 4.7KΩ ~ 472
E-96 Series: the 1st to 3rd digits are significant figures of resistance and the fourth one denotes number of zeros following:
 Ex.: 1.33KΩ = 1331

Packing Quantity:
 1 = 1,000pcs
 2 = 2,000pcs
 3 = 3,000pcs
 4 = 4,000pcs
 5 = 5,000pcs
 A = 500pcs
 B = 2,500pcs
 C = 10,000pcs
 D = 20,000pcs
 0 = for Bulk/Box packing

Packing Type:
 A = Tape/Box
 T = Tape/Reel
 B = Bulk/Box

Addition Information:
 0 = PT-52mm, NIL for PT-26mm
 8 = PT-58mm
 9 = PT-64mm
 P = Panasert type
 1 = Avisert type 1
 2 = Avisert type 2
 3 = Avisert type 3
 A = Cutting type CO 1/4W-A type
 B = Cutting type CO 1/4W-B type
 7 = Lead wire(H) 38mm

Ex. Sample: CR 1/8W +/- 5% 10Ω T/B 5,000 → CFR0W8J0100A50