




VERSION	CHANGE CONTENT	DATE
V01	修改铁框VA尺寸	2007-11-27

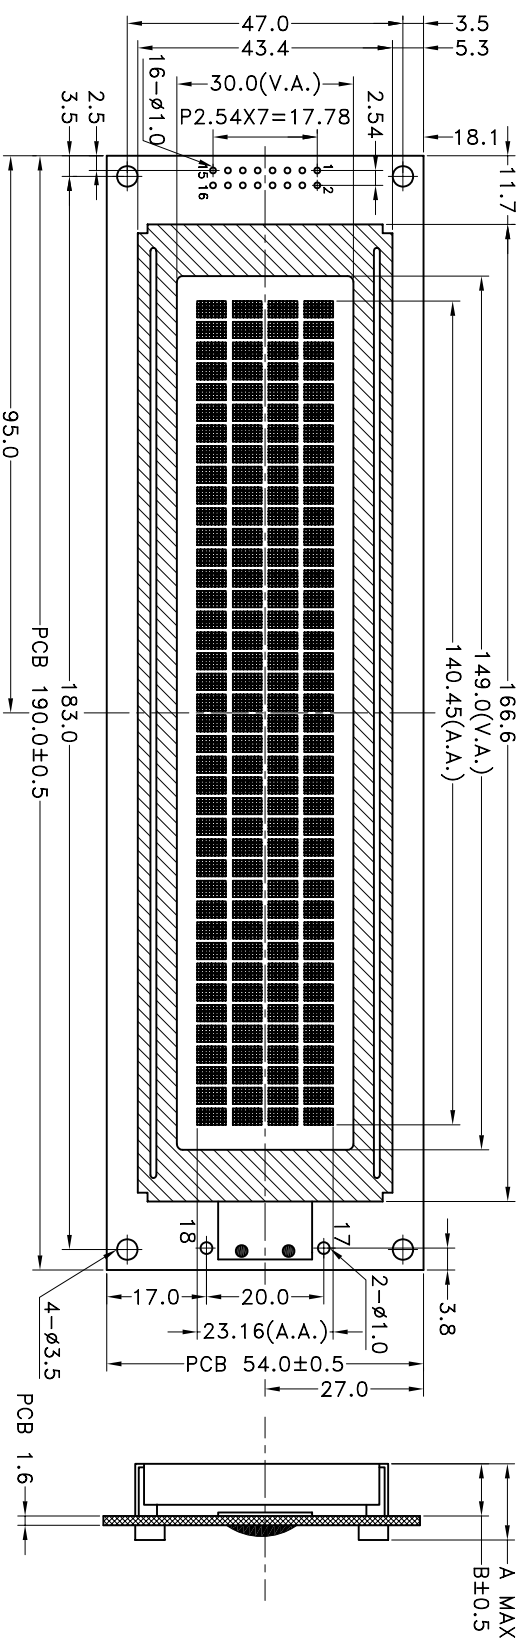

TYPE	A	B
LED B/L	13.5	9.0

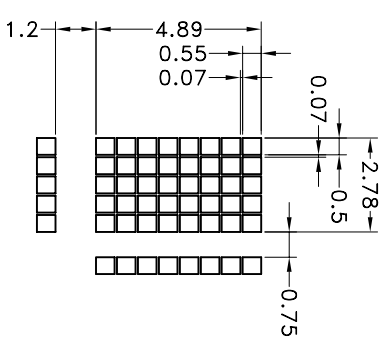

DETAIL DOTS
SCALE: 5:1



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
NAME	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E1	R/W	RS	V0	VSS	VCC	E2	NC	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSFLECTIVE/POSITIVE-Y-G
2. LCD DRIVING VOLTAGE: 4.4V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -0° C-50° C
6. STORAGE TEMP: -20° C-70° C
7. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
8. BACKLIGHT: YELLOW GREEN/BOTTOM BACKLIGHT/5.0V
9. CONTROL/DRIVE IC: SPLC780D-001B-C/SPLC100A2-C
10. OTHER:

NOTE:

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	ELECTRONICS CO.,LTD.	ELECTRONICS CO.,LTD.
PROJECTION	MODEL	SERIAL NUMBER
UNIT: mm	TC4004A-01A	MLX0445
APP:	CHK:	DWN:
DATE:	DATE:	DATE: