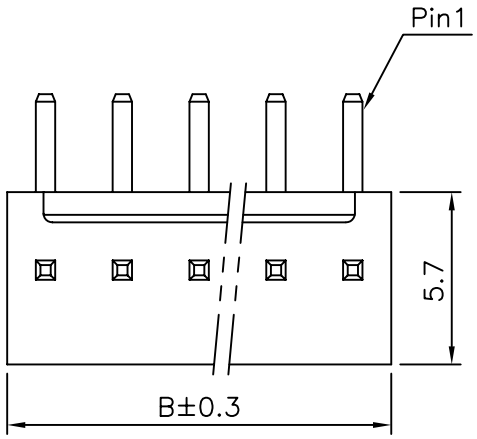

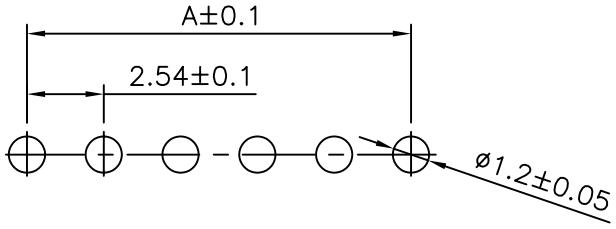

Recommand PCB Layout

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ WAFER

- Part No. : JS-7001-XX
  JS-7001-XX : GP Produces
- PolesN : 2-15
- Material : Contact : Brass, Tin Plated
  Base : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

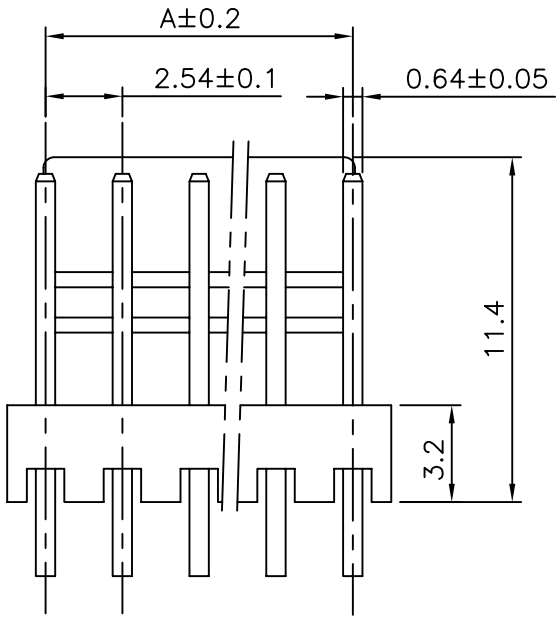

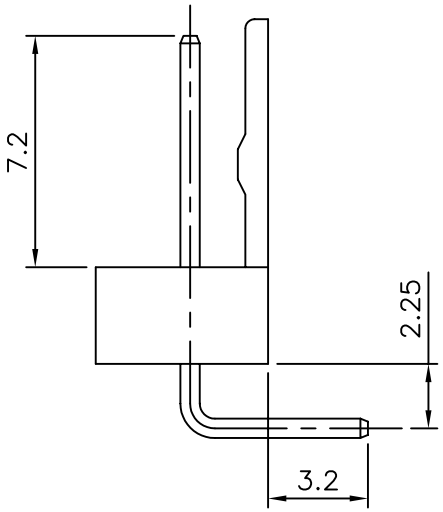

Poles	Part No.	Dimensions(mm)	
		A	B
2	JS-7001-02	2.54	5.08
3	JS-7001-03	5.08	7.62
4	JS-7001-04	7.62	10.16
5	JS-7001-05	10.16	12.70
6	JS-7001-06	12.70	15.24
7	JS-7001-07	15.24	17.78
8	JS-7001-08	17.78	20.32
9	JS-7001-09	20.32	22.86
10	JS-7001-10	22.86	25.40
11	JS-7001-11	25.40	27.94
12	JS-7001-12	27.94	30.48
13	JS-7001-13	30.48	33.02
14	JS-7001-14	33.02	35.56
15	JS-7001-15	35.56	38.10

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-7001-XX

2.54mm Crimp Style Connectors Wafer

APPROVED BY	SCALE	UNIT
林陳鑠	4:1	mm
CHECKED BY	PROJ	VER NO.
		a1
DRAWN BY	DATE	SIZE
佘秀麗	2005/05/15	A4

TOLERANCE	
.0	±0.3
.00	±0.2
.000	±0.1
ALL	±
ANGLE	
0°	±
.0°	±

LTR	REVISION RECORD	DATE
ECR	RoHS Compliant	07/01/03

LTR	REVISION RECORD	DATE

CUSTOMER

Conforms to The RoHS Instruction