


■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 20mΩ max

■ WAFER

- Part No. : JS-1261-XXX

- Poles : 2-16
- Material : Contact : Phos. Bronze, Tin Plated  
Base : Nylon 9T UL94V-0

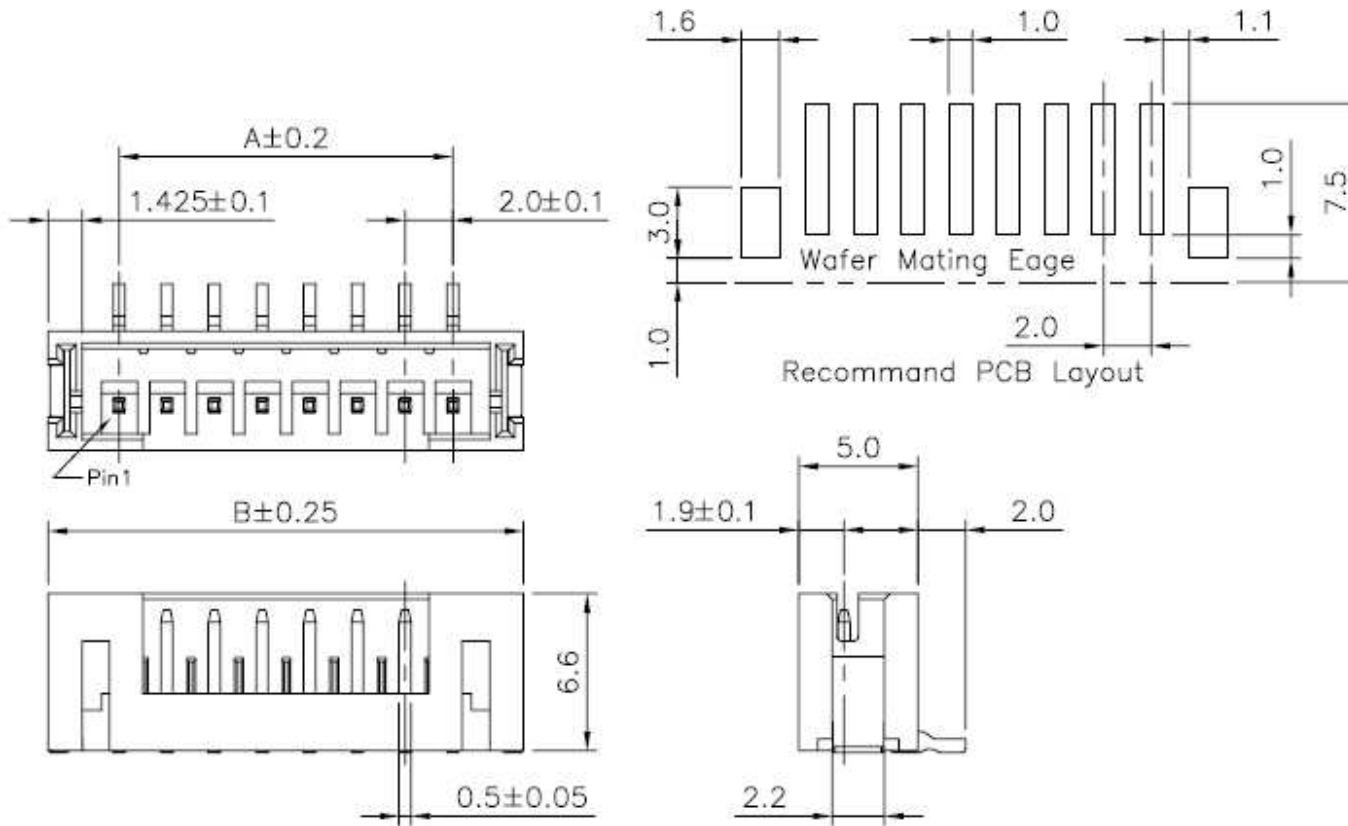

Poles	Part No.	Dimensions(mm)	
		A	B
2	JS-1261-02	2.00	7.95
3	JS-1261-03	4.00	9.95
4	JS-1261-04	6.00	11.95
5	JS-1261-05	8.00	13.95
6	JS-1261-06	10.00	15.95
7	JS-1261-07	12.00	17.95
8	JS-1261-08	14.00	19.95
9	JS-1261-09	16.00	21.95
10	JS-1261-10	18.00	23.95
11	JS-1261-11	20.00	25.95
12	JS-1261-12	22.00	27.95
13	JS-1261-13	24.00	29.95
14	JS-1261-14	26.00	31.95
15	JS-1261-15	28.00	33.95
16	JS-1261-16	30.00	35.95

oznaczenie MARITEX: WS-XXDV


 喬訊電子工業股份有限公司  
 CHYAO SHIUNN  
 ELECTRONIC INDUSTRIAL LTD.

PART NO JS-1261-XX

2.00mm Crimp Style Connectors Wafer

APPROVED BY	SCALE	UNIT	TOLERANCE
林陳鏞	3:1	mm	.0 ±0.3
CHECKED BY	PROJ	VER NO.	.00 ±0.2
林勇生	⊕ □	a1	.000 ±0.1
DRAWN BY	DATE	SIZE	ALL ±
余秀麗	2005/04/27	A4	ANGLE
			0° ±
			.0° ±

LTR	REVISION RECORD	DATE
ECR	200504-015	2005/04/28